LG

GOLD-00467

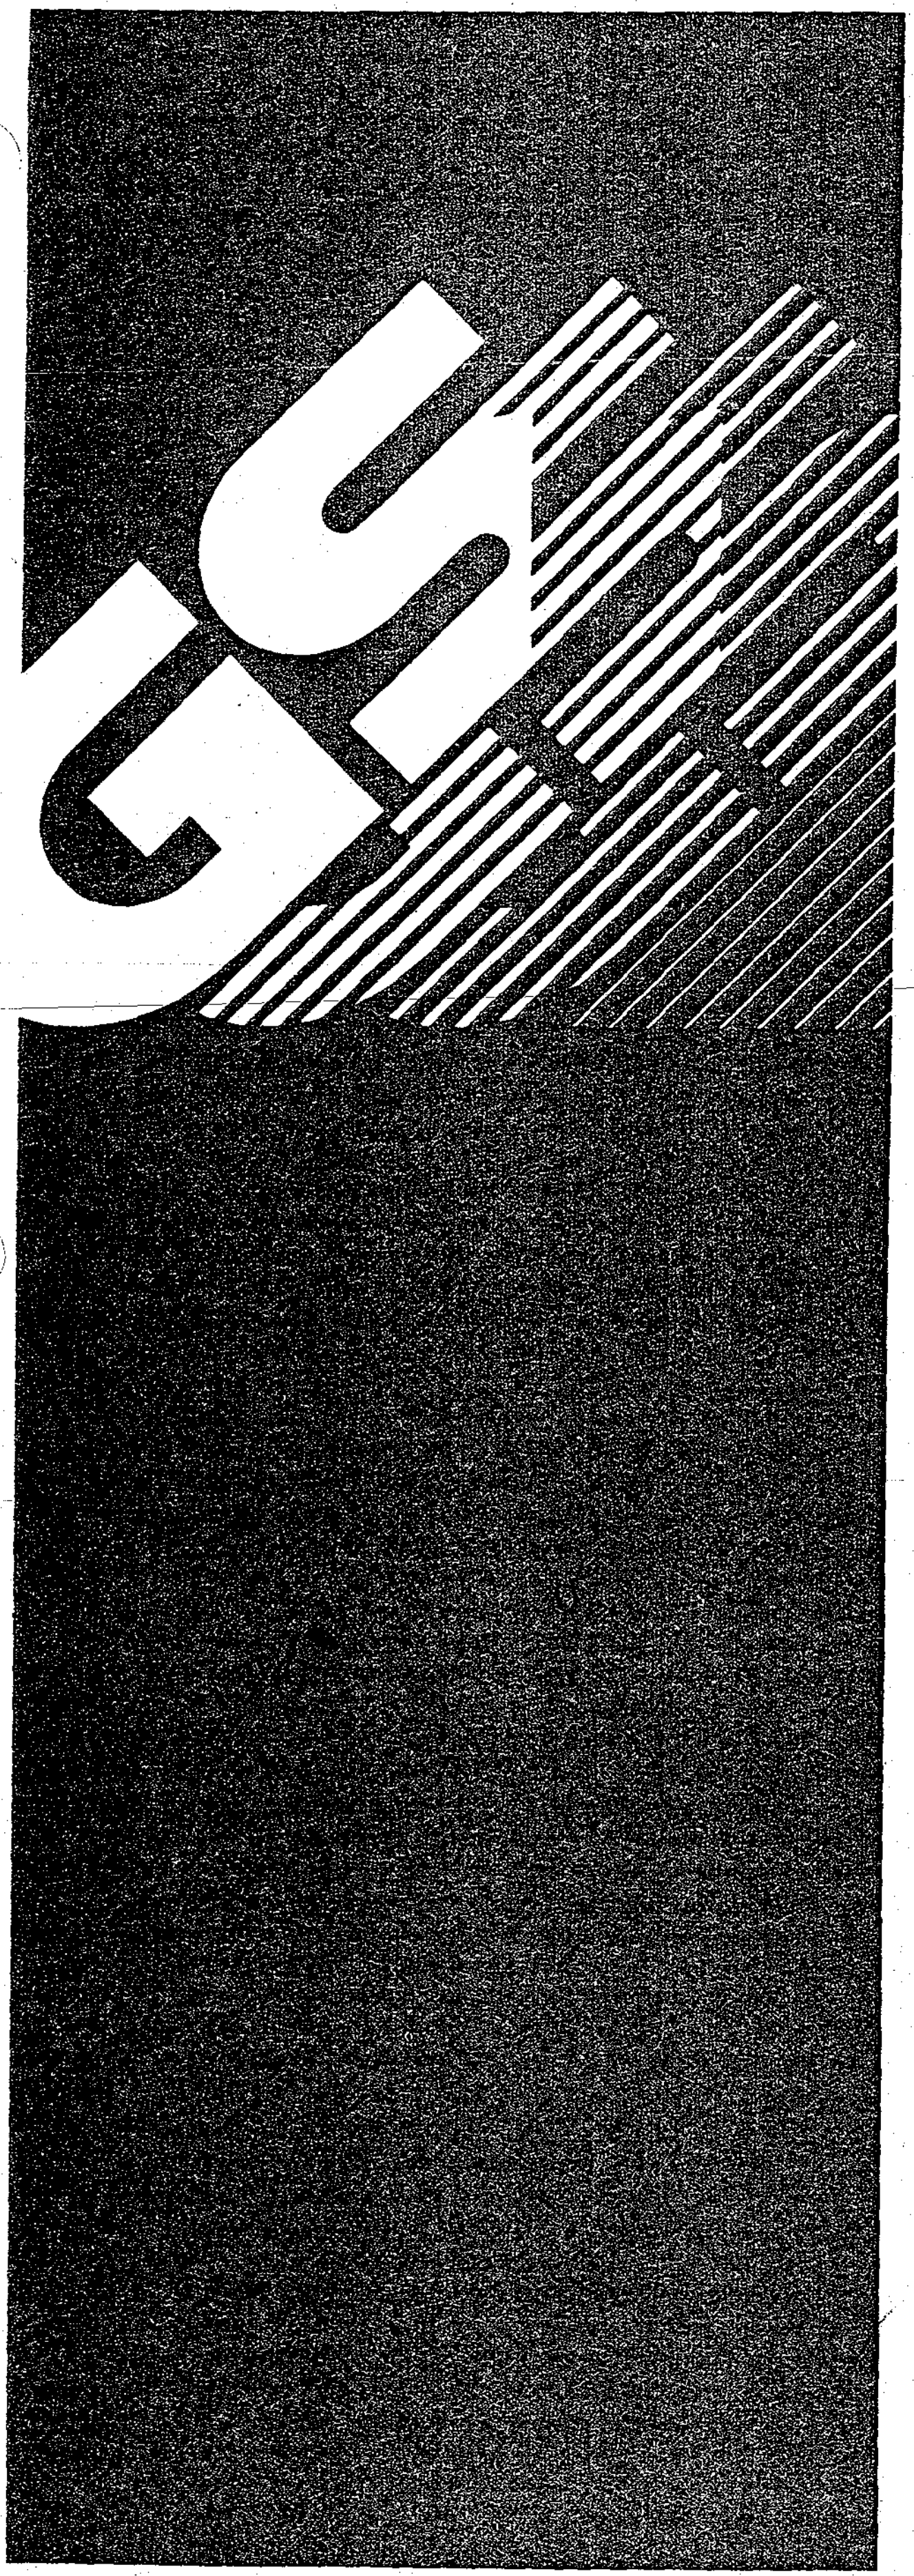

GoldStar

COMPACT DISC STEREO SYSTEM

SERVICE MANUAL

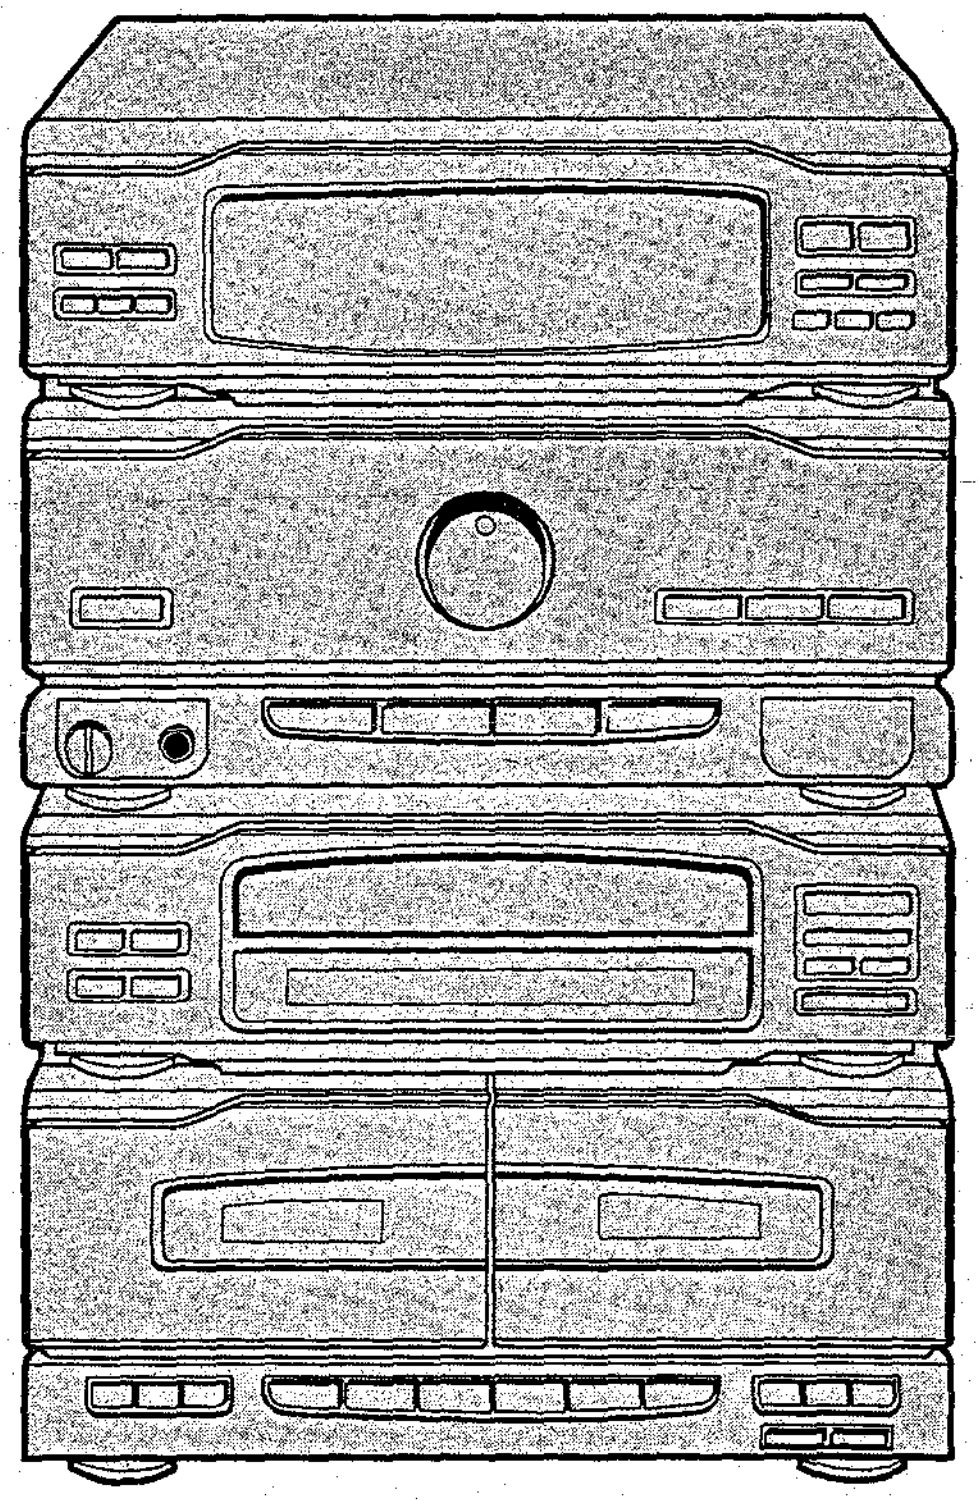

MODEL : FJ-606
FR-606L

GoldStar

467

CONTENTS

MODEL : FJ-606

1. SPECIFICATIONS ···· 3
2. SERVICE INSTRUCTIONS ···· 4
3. ADJUSTMENTS ···· 5
4. DESCRIPTION OF FUNCTIONS ···· 11
5. WAVEFORMS OF MAJOR CHECK POINTS ···· 17
6. BLOCK DIAGRAM ···· 19
7. SCHEMATIC DIAGRAM
   - ● DECK CIRCUIT ···· 20
   - ● CD CIRCUIT ···· 21
8. PCB LAYOUT ···· 22
9. WIRING DIAGRAM ···· 23
10. INTERNAL BLOCK DIAGRAM OF ICs ···· 24
11. EXPLODED VIEW/PARTS LIST
   - ● CABINET ···· 27
   - ● TAPE DECK MECHANISM ···· 28
   - ● TAPE DECK MECHANISM-A ···· 29
   - ● TAPE DECK MECHANISM-B ···· 30
   - ● CD MECHANISM ···· 31
12. REPLACEMENT PARTS LIST ···· 32

MODEL : FR-606L

1. SPECIFICATIONS ···· 46
2. ADJUSTMENTS ···· 48
3. BLOCK DIAGRAM ···· 50
4. SCHEMATIC DIAGRAM
   - ● MAIN CIRCUIT ···· 51
   - ● FRONT CIRCUIT ···· 52
5. PCB LAYOUT ···· 53
6. WIRING DIAGRAM ···· 55
7. INTERNAL BLOCK DIAGRAM OF ICs ···· 56
8. EXPLODED VIEW/PARTS LIST ···· 58
9. REPLACEMENT PARTS LIST ···· 59

DOUBLE CASSETTE DECK & COMPACT DISC PLAYER

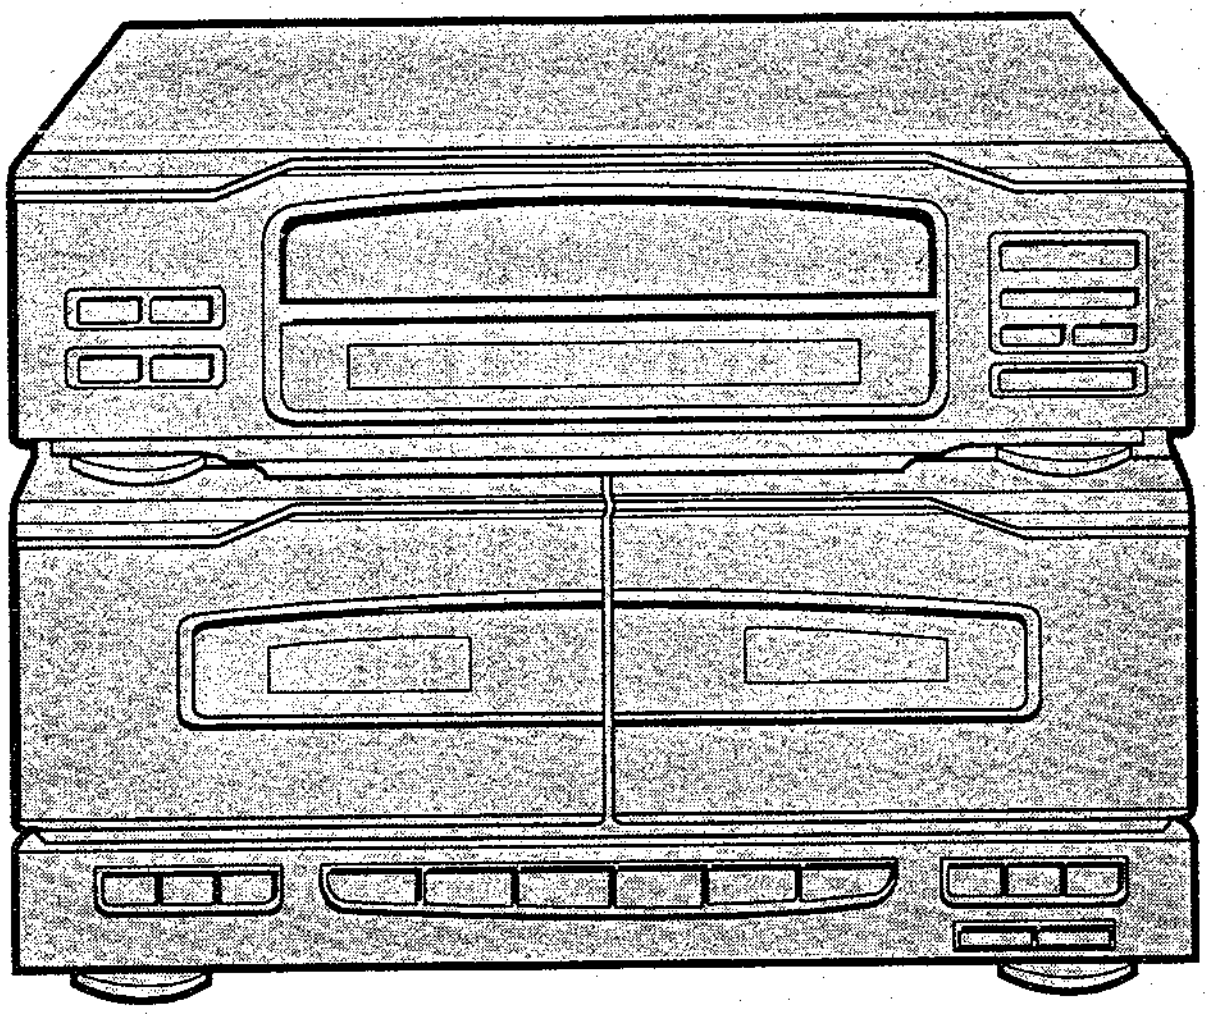

MODEL : FJ-606

SPECIFICATIONS

1. CASSETTE TAPE RECORDER SECTION

(1) Tape Speed Hi-Speed	More than 1.8times of normal speed
Normal Speed	4.75cm/sec
(2) Wow & Flutter (JIS-WTD)	0.2%
(3) Fast Forward and Rewind Time (C-60)	120sec
(4) Frequency Response (4dB range)	250Hz~10kHz
(5) Signal-to-noise Ratio	50dB
(6) Distortion (Playback/Record)	1%/1.5%
(7) Cross Talk	60dB
(8) Channel Separation	35dB
(9) Erase Ratio	65dB

2. COMPACT DISC PLAYER SECTION

(1) Frequency Response (40Hz~20kHz)	±0.5dB
(2) Signal-to-noise Ratio	85dB
(3) Dynamic Range	85dB
(4) T.H.D.	0.05%
(5) Channel Separation 100Hz/1kHz/10kHz	80dB/80dB/70dB
(6) Access Time (Short/Long)	2sec/6sec

3. GENERAL

(1) Line Voltage	DC 15V~18V
(2) Dimension (W×H×D)	270×203×300 (mm)
(3) Jacks	Power+Signal (15P Socket)

NOTE : Specifications are subject to change without notice in the course of product improvement.

SERVICE INSTRUCTIONS

PRECAUTION TO REPLACE OPTICAL BLOCK

Body or clothes electrostatic potential could ruin laser diode in the optical block. Be sure ground body and workbench, and use care the clothes do not touch the diode.

1) After the connection, remove solder shown in right figure.

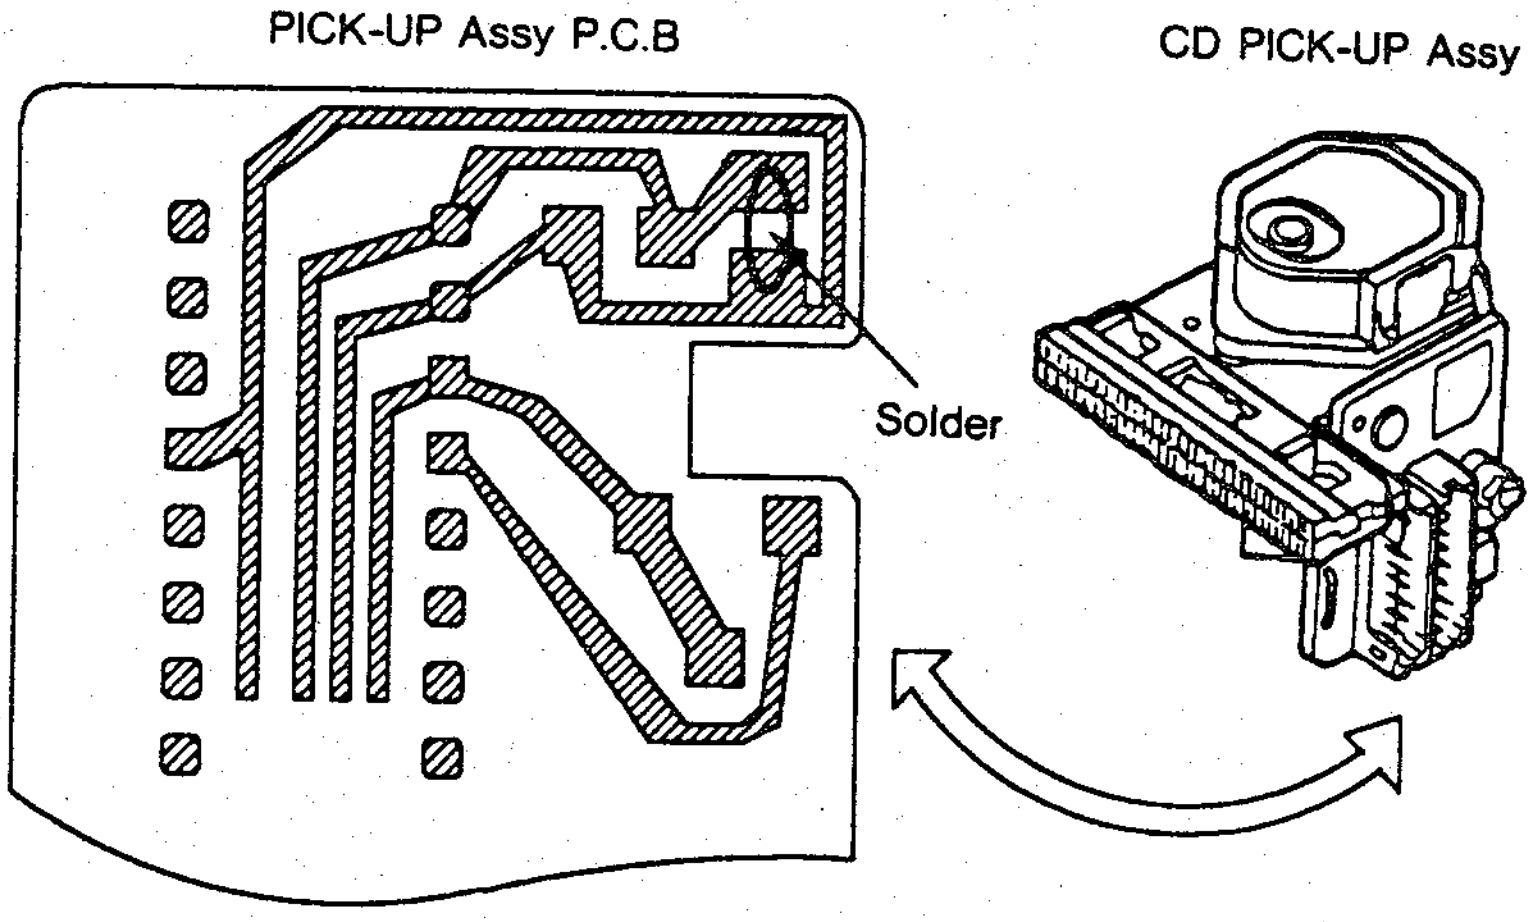

To prevent electrostatic breakdown, laser diode and ground are connected with solder.

NOTE : When removing solder, be sure to use a grounded solder-iron, to prevent electrostatic breakdown.

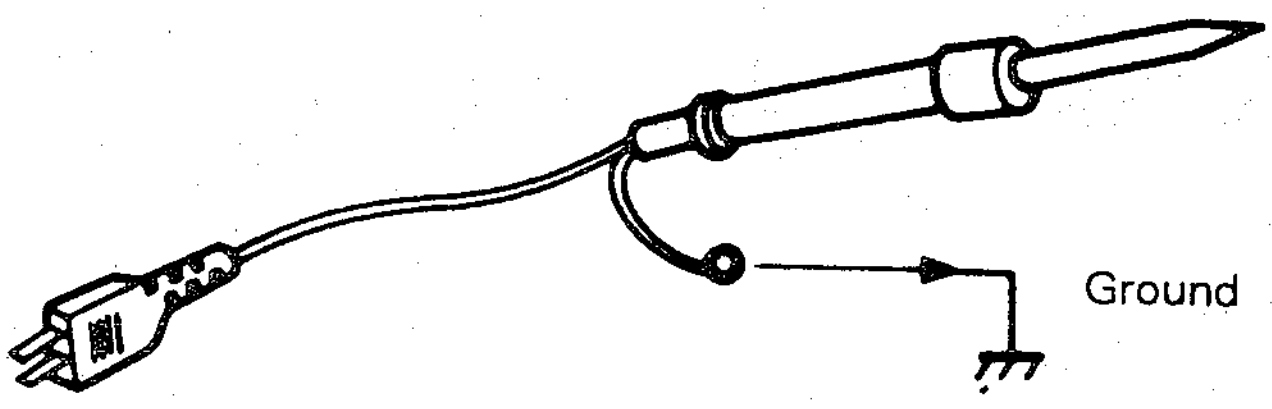

CAUTION FOR HANDLING THE OPTICAL PICK-UP

The laser diode in the optical pick-up block may suffer electrostatic breakdown because of the potential difference generated by the charged electrostatic load, etc. on clothing and the human body. So, when handing a pick-up, the procedure for grounding as follows is required to prevent damage caused by static electricity.

1. Grounding for Human Body.
   Be sure to put on a wrist-strap for grounding (with impedance lower than $10^{8}\Omega$) whose other end is grounded. The strap works to drain away the static electricity build-up on the human body.
2. Grounding For the Work Table.
   Be sure to lay on the table a conductive sheet (with impedance lower than $10^{9}\Omega$) such as a sheet of copper, which is grounded.
3. As static electricity build-up on clothes is not drained away, be careful not to let your clothes touch the pick-up.

ADJUSTMENTS

This set has been aligned at the factory and normally will not require further adjustment. As a result, it is not recommended that any attempt is made to modificate any circuit. If any parts are replaced or if anyone tampers with the adjustment, realignment may be necessary.

TEST & ADJUSTMENT POINT

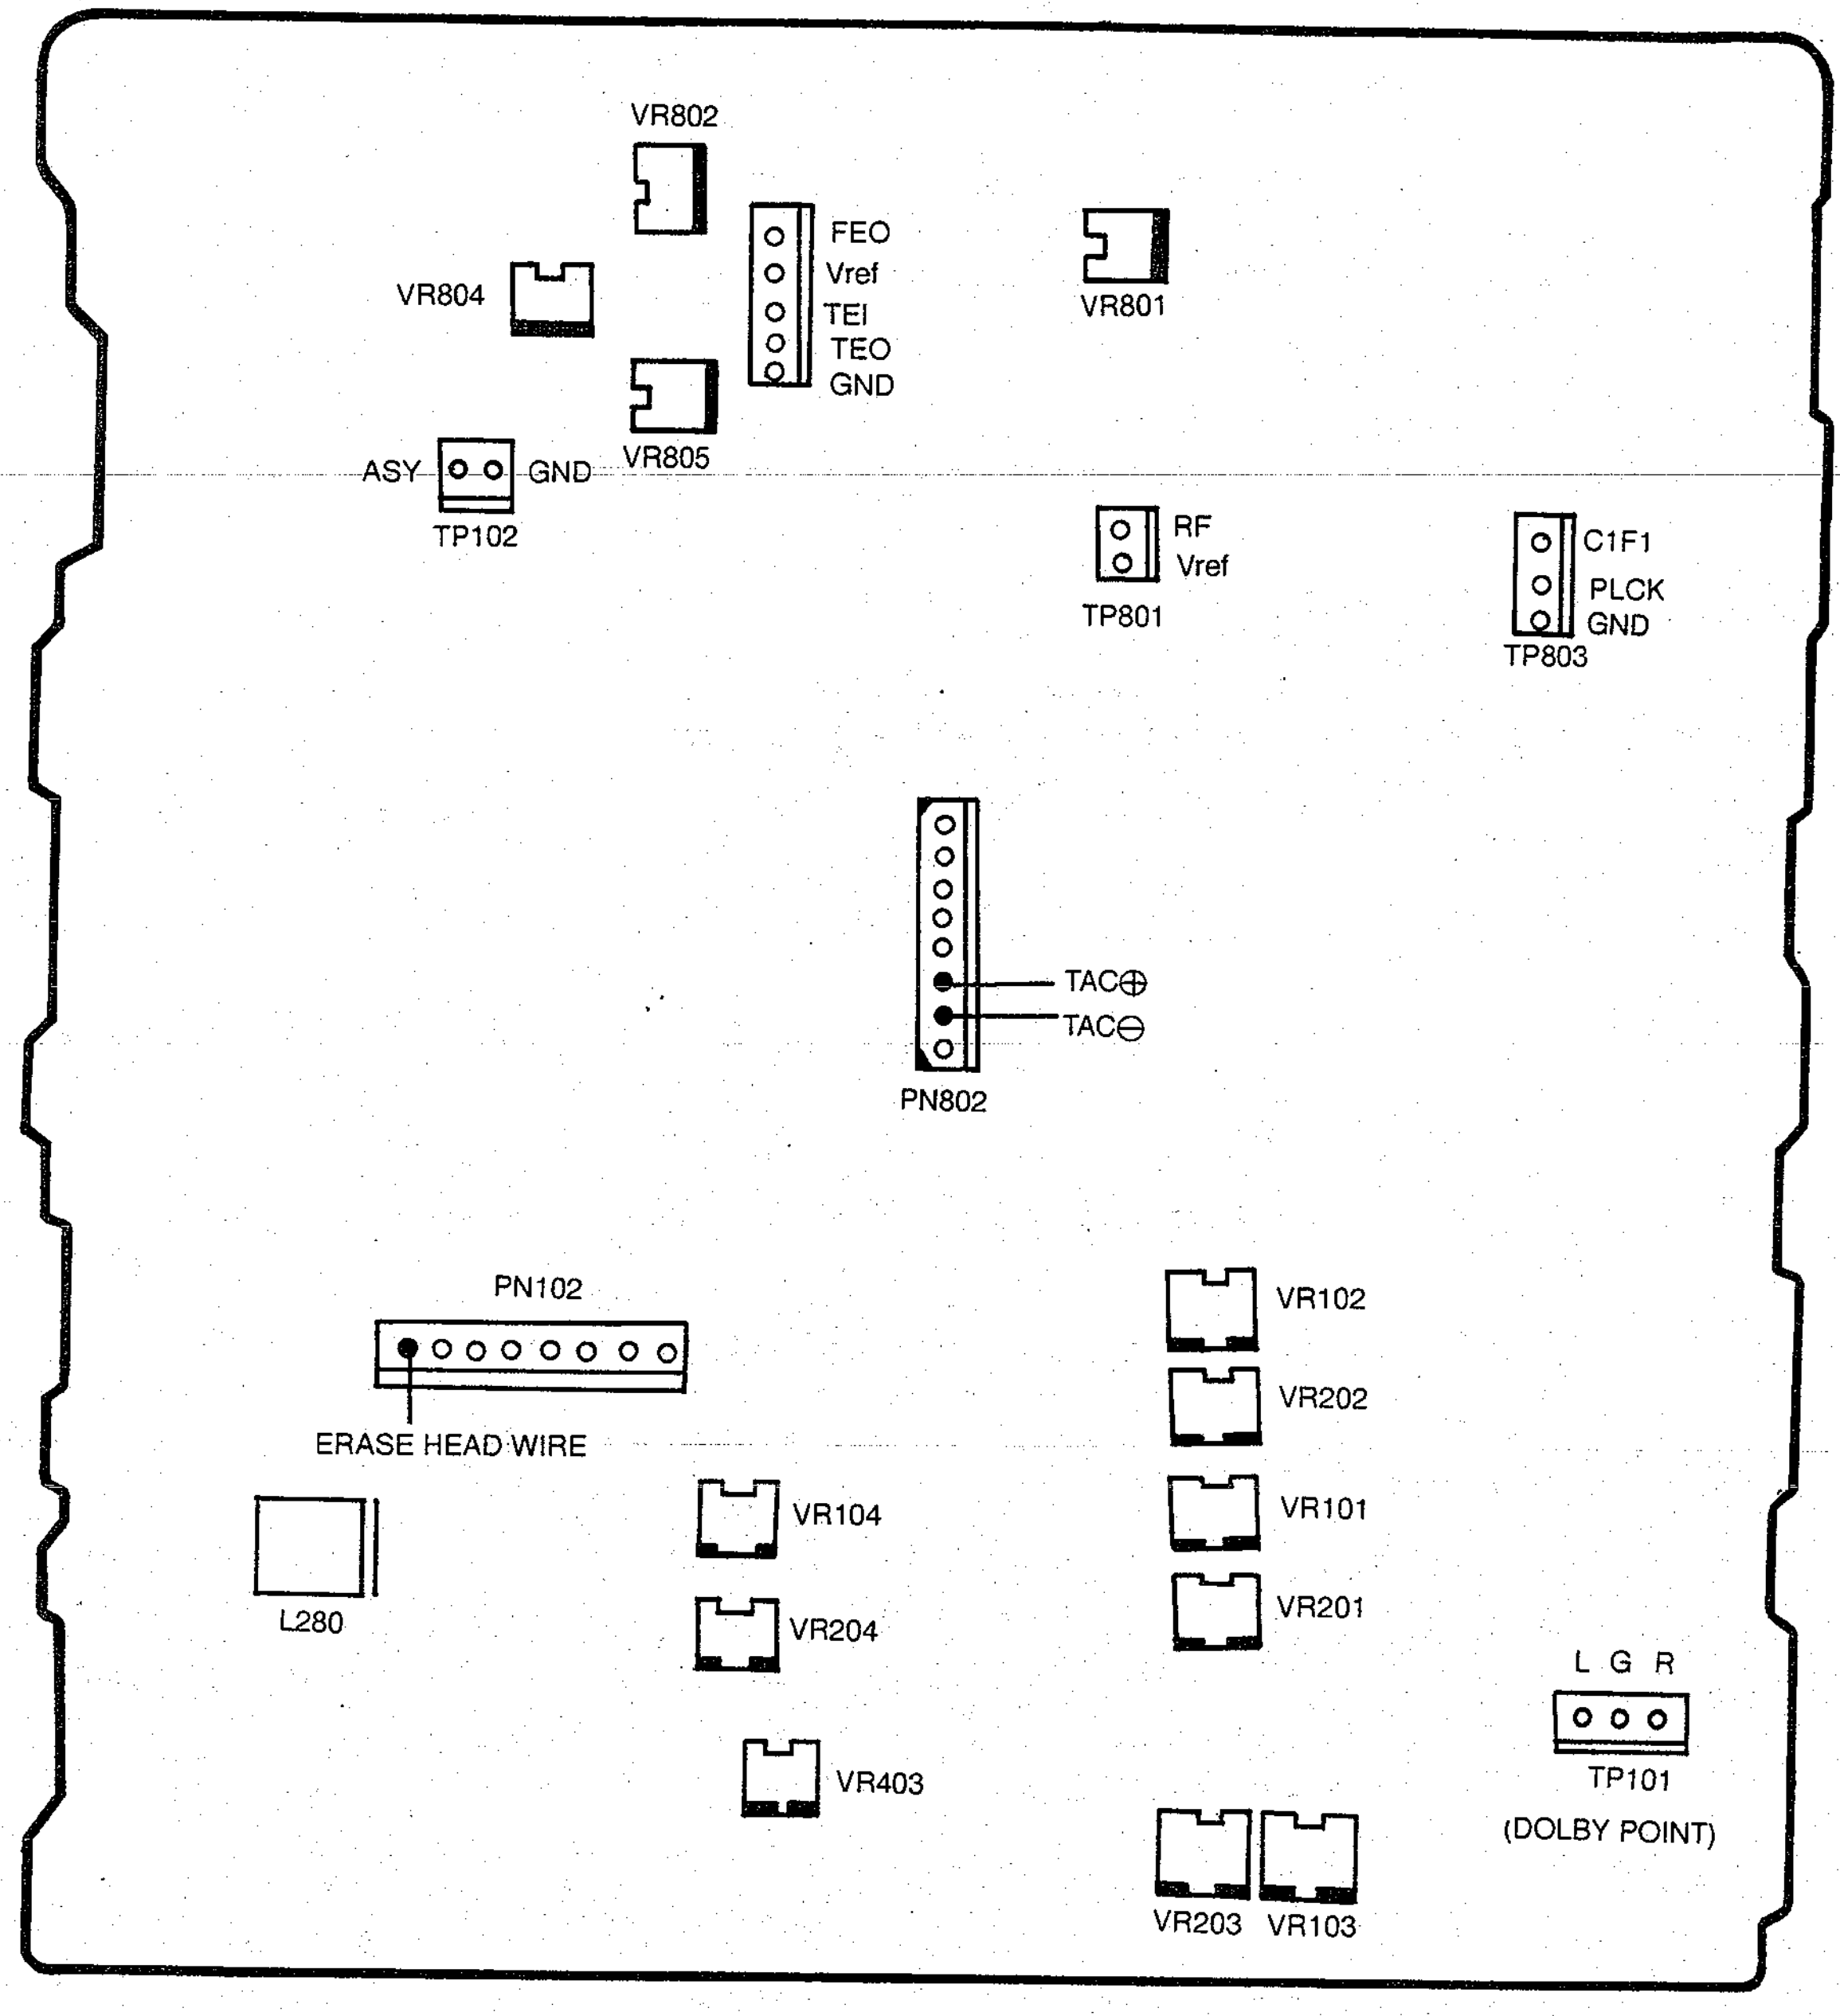
VR802
VR804
FEO
Vref
TEI
TEO
GND
VR801
VR805
ASY
GND
TP102
RF
Vref
TP801
C1F1
PLCK
GND
TP803
TAC⊕
TAC⊖
PN802
PN102
ERASE HEAD WIRE
VR102
VR202
VR101
VR201
VR104
VR204
L280
VR403
L G R
TP101
(DOLBY POINT)
VR203
VR103

Figure 1. P.C.BOARD

TAPE DECK ADJUSTMENTS

1. AZIMUTH ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjust for	Adjustment	Remark
Playback	MTT-114	Dolby Point (TP101)	Head screw	R/L Maximum	Forward : Lefthand side screw Reverse : Righthand side screw

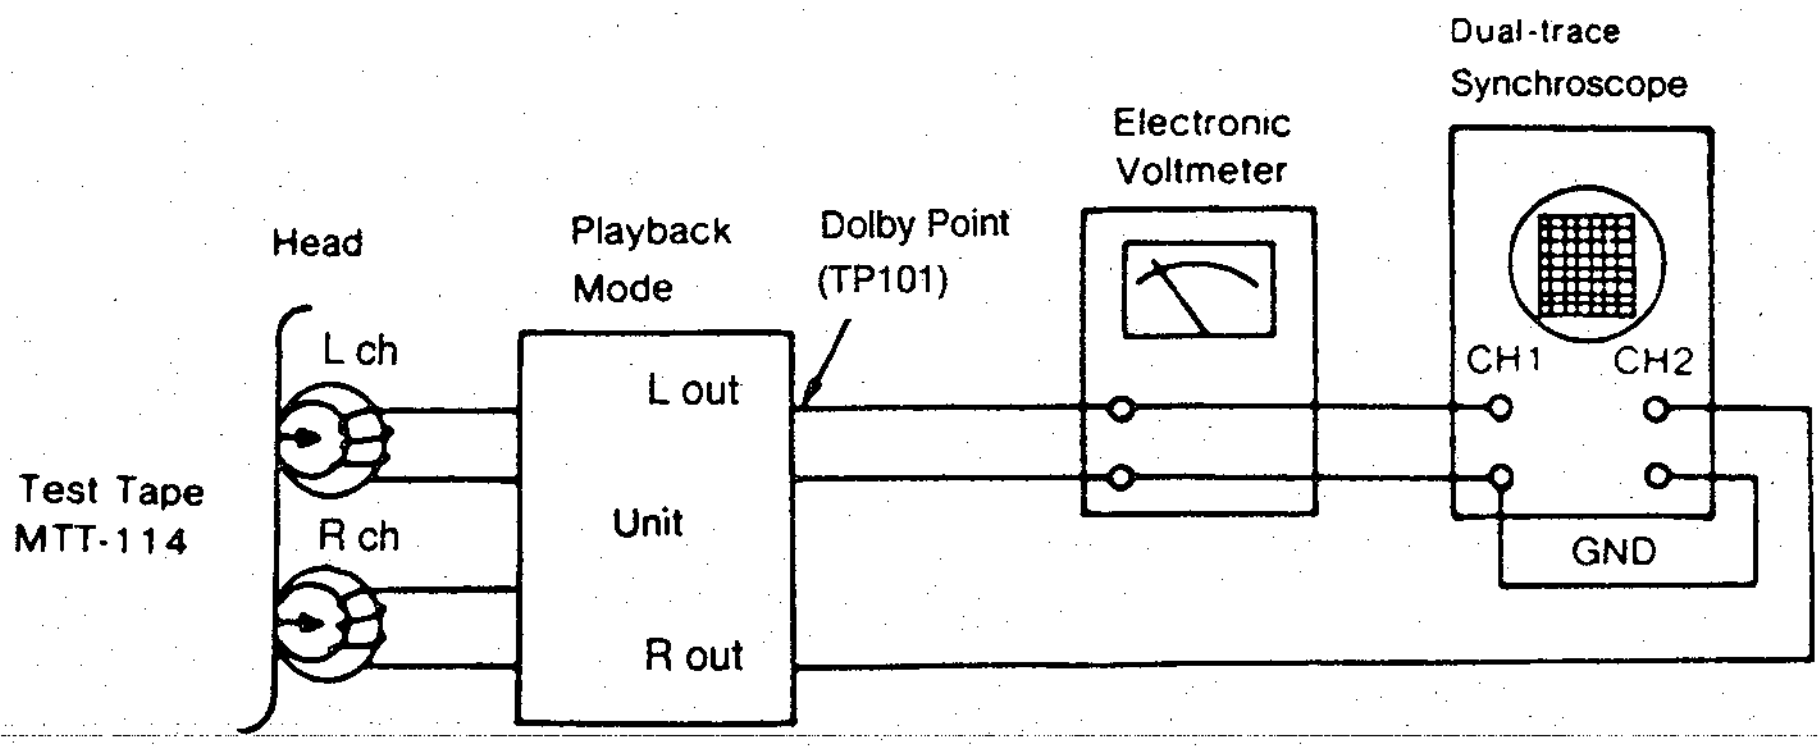
Dual-trace Synchroscope
Electronic Voltmeter
Head
Playback Mode
Dolby Point (TP101)
L ch
L out
Test Tape MTT-114
R ch
Unit
R out
CH1
CH2
GND

Figure 2. Azimuth Adjustment Connection Diagram

2. MOTOR SPEED ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjustment	Adjust for	Remark
Playback	MTT-111	Dolby Point (TP101)	VR403	3kHz±15Hz	After adjusting in forward, confirm the specification in reverse mode.

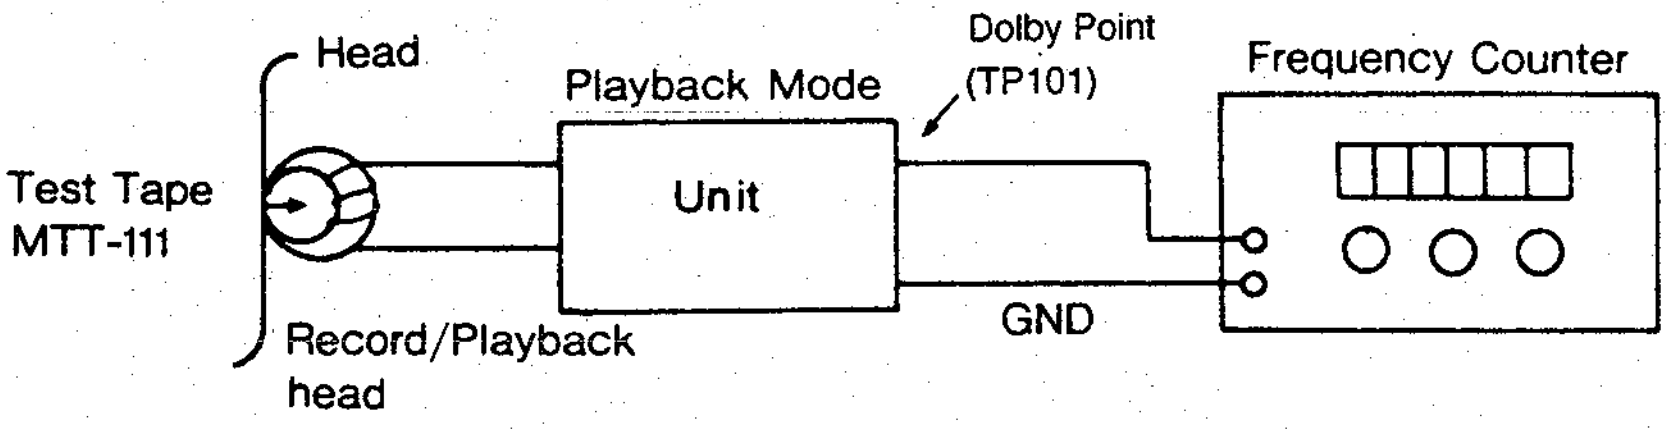
Head
Playback Mode
Dolby Point (TP101)
Frequency Counter
Test Tape MTT-111
Unit
GND
Record/Playback head

Figure 3. Motor Speed Adjustment Connection Diagram

3. PLAYBACK LEVEL ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjustment	Adjust for	Remark
Playback	MTT-150	Dolby Point (TP101)	A: VR102, VR202 B: VR101, VR201	548mV±1dB	After adjusting in forward, confirm the specification in reverse mode.

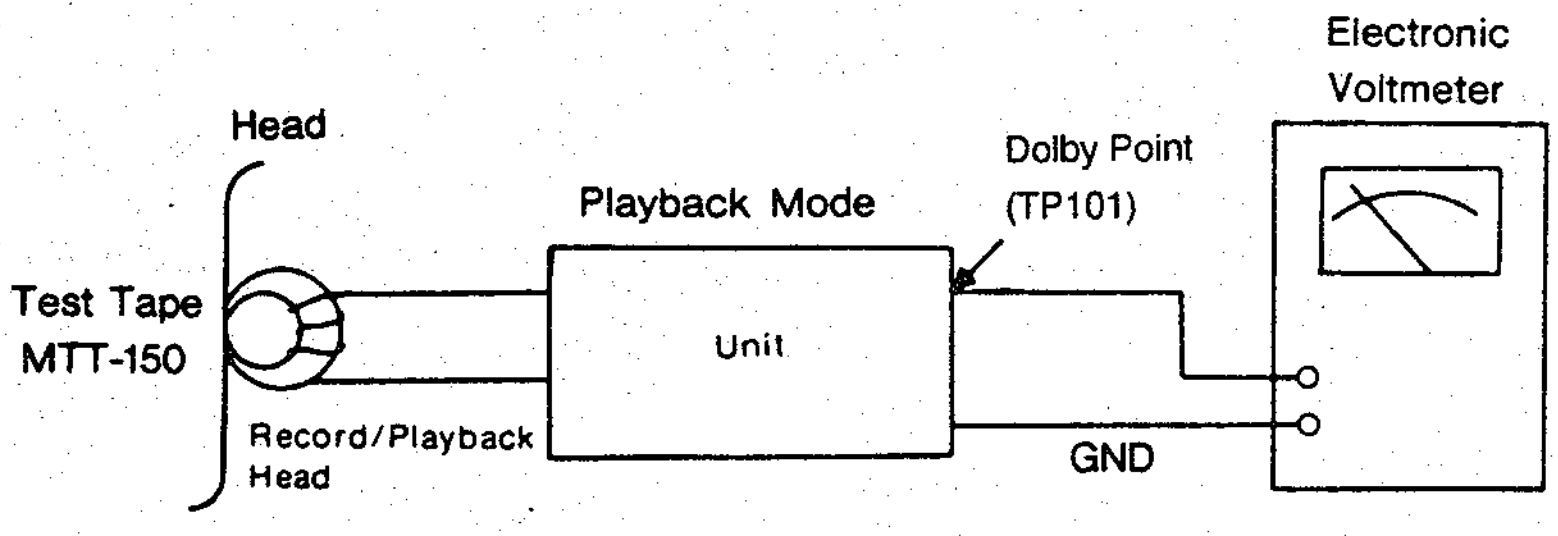
Electronic Voltmeter
Head
Dolby Point (TP101)
Playback Mode
Test Tape MTT-150
Unit
Record/Playback Head
GND

Figure 4. Playback Level Adjustment Connection Diagram

4. RECORD BIAS ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjustment	Adjust for
Rec/Pause	MTT-5561	ERASE HEAD WIRE (PN102 #1)	L280	105kHz±5kHz

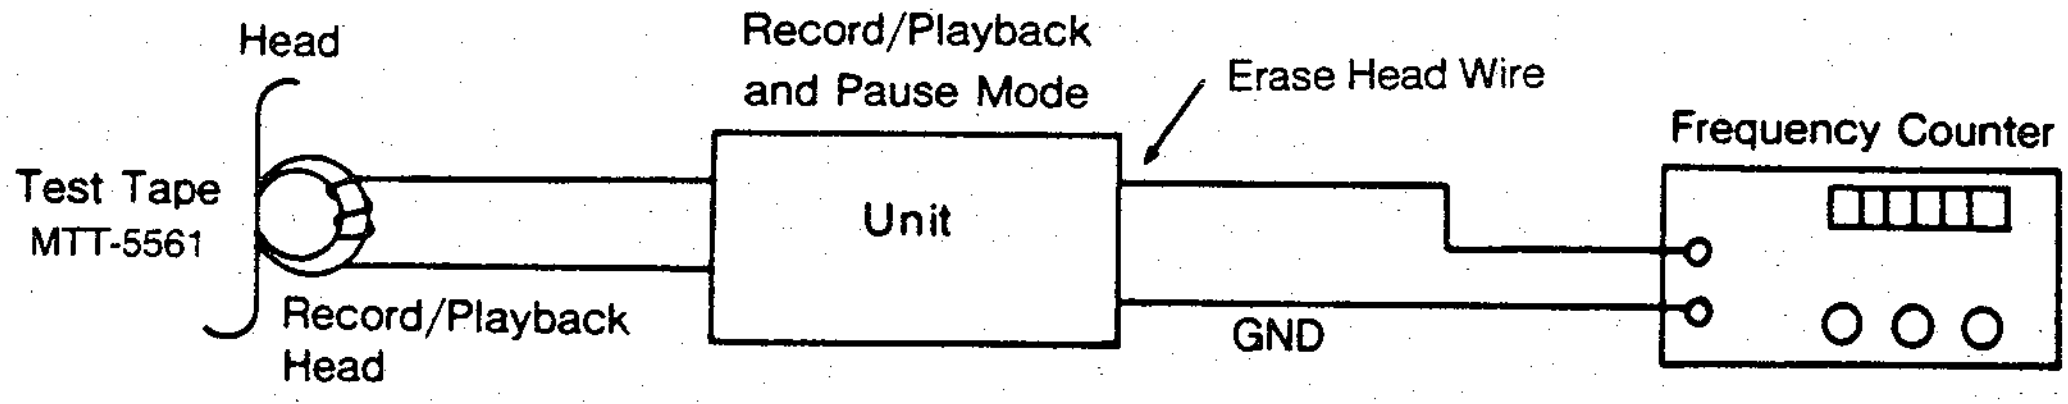
Head
Test Tape
MTT-5561
Record/Playback Head
Record/Playback and Pause Mode
Unit
Erase Head Wire
GND
Frequency Counter

Figure 5. Record Bias Adjustment Connection Diagram

5. RECORD LEVEL ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjustment	Input	Adjust for	Remark
R/P→PB	MTT-5511 MTT-5561	Dolby Point (TP101)	VR103 VR203	400Hz	245mV±1dB	• Dolby OFF • After adjusting in MTT-5511, confirm in MTT-5561.

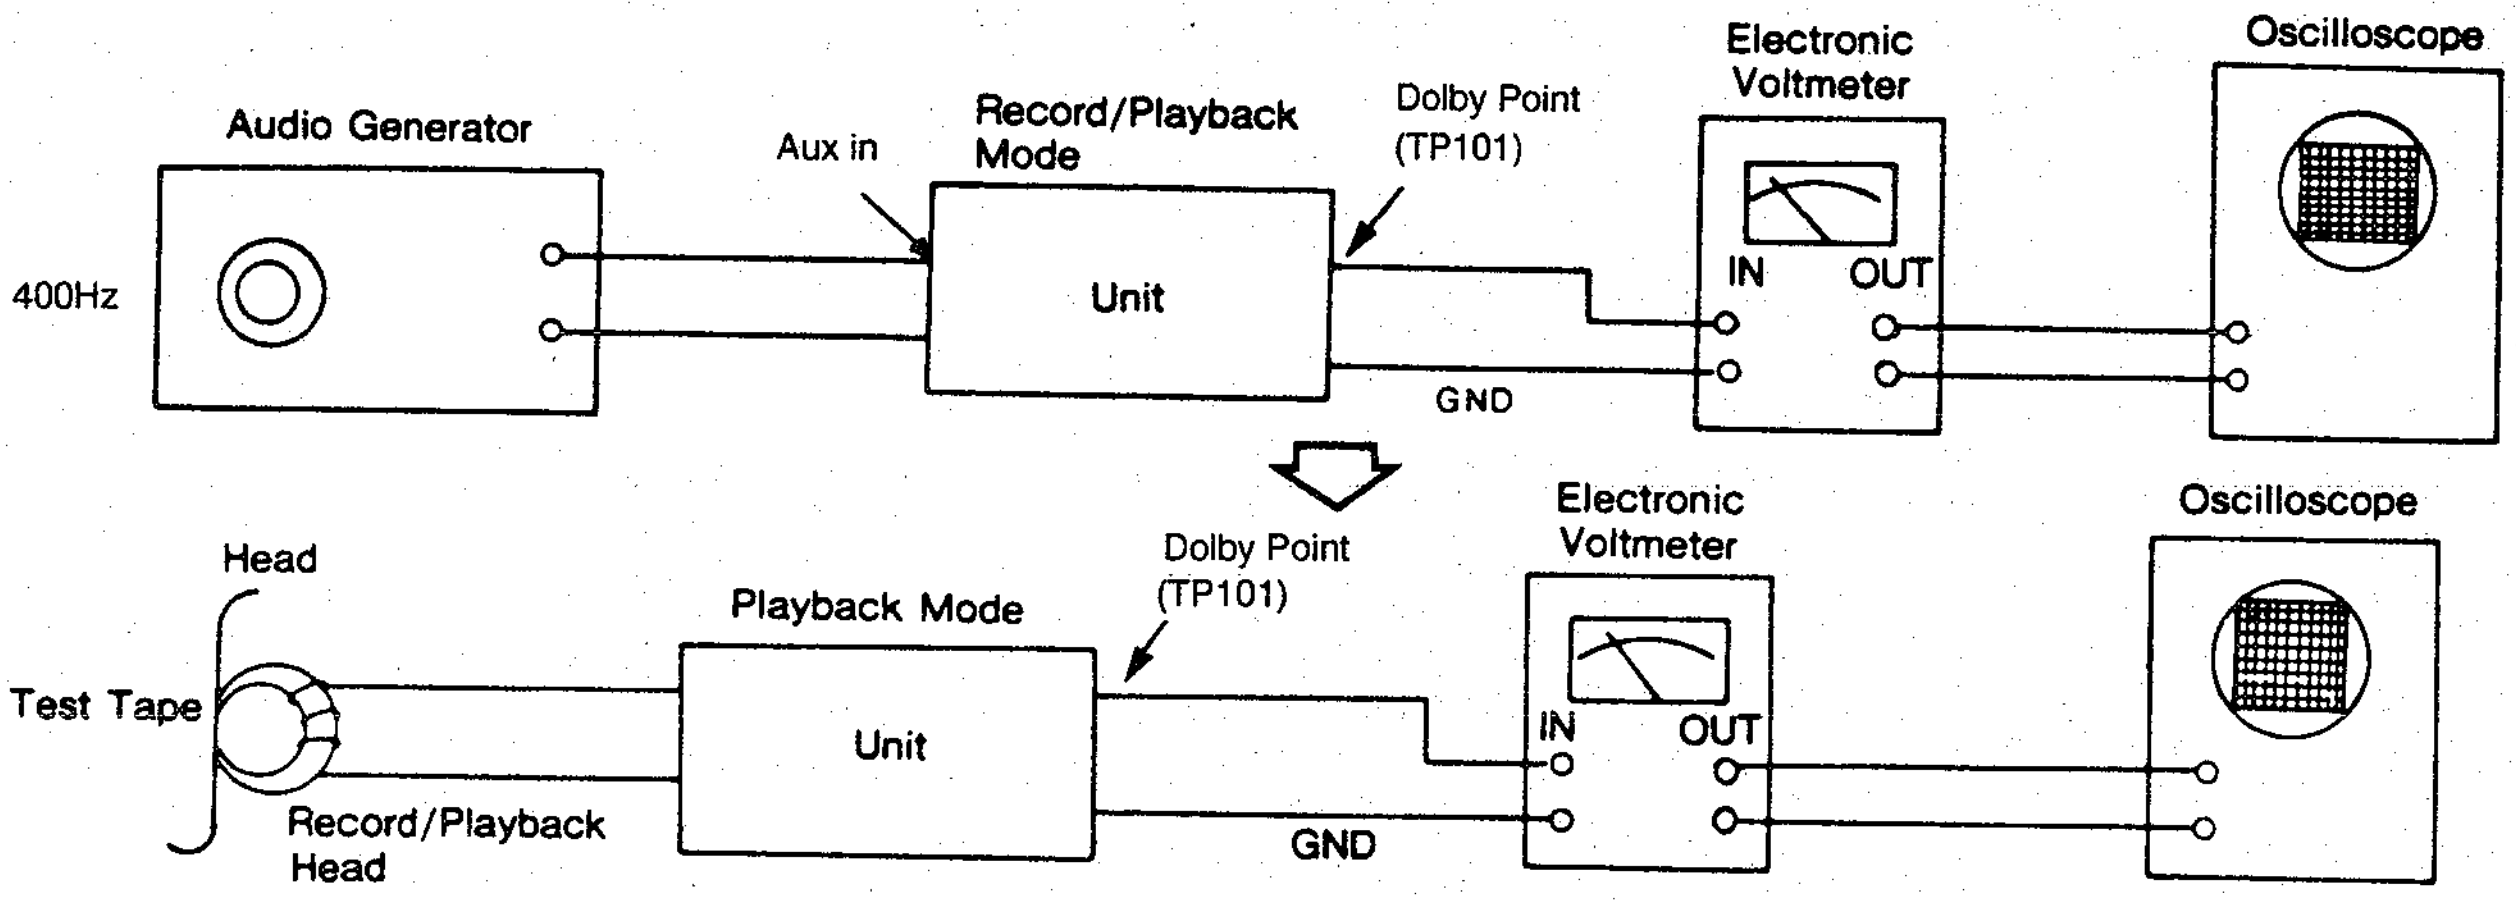
Audio Generator
400Hz
Aux in
Record/Playback Mode
Unit
Dolby Point (TP101)
GND
Electronic Voltmeter
IN
OUT
Oscilloscope
Head
Test Tape
Record/Playback Head
Playback Mode
Unit
Dolby Point (TP101)
GND
Electronic Voltmeter
IN
OUT
Oscilloscope

Figure 6. Record Level Adjustment Connection Diagram

6. BIAS ADJUSTMENT

Deck Mode	Test Tape	Test Point	Adjustment	Input	Adjust for	Remark
R/P→PB	MTT-5511 MTT-5561	Dolby Point (TP101)	VR104 VR204	548mV -25dB (on AUX)	Adjust for the response of 1kHz/10kHz flat	After adjusting in MTT-5511, confirm in MTT-5561.

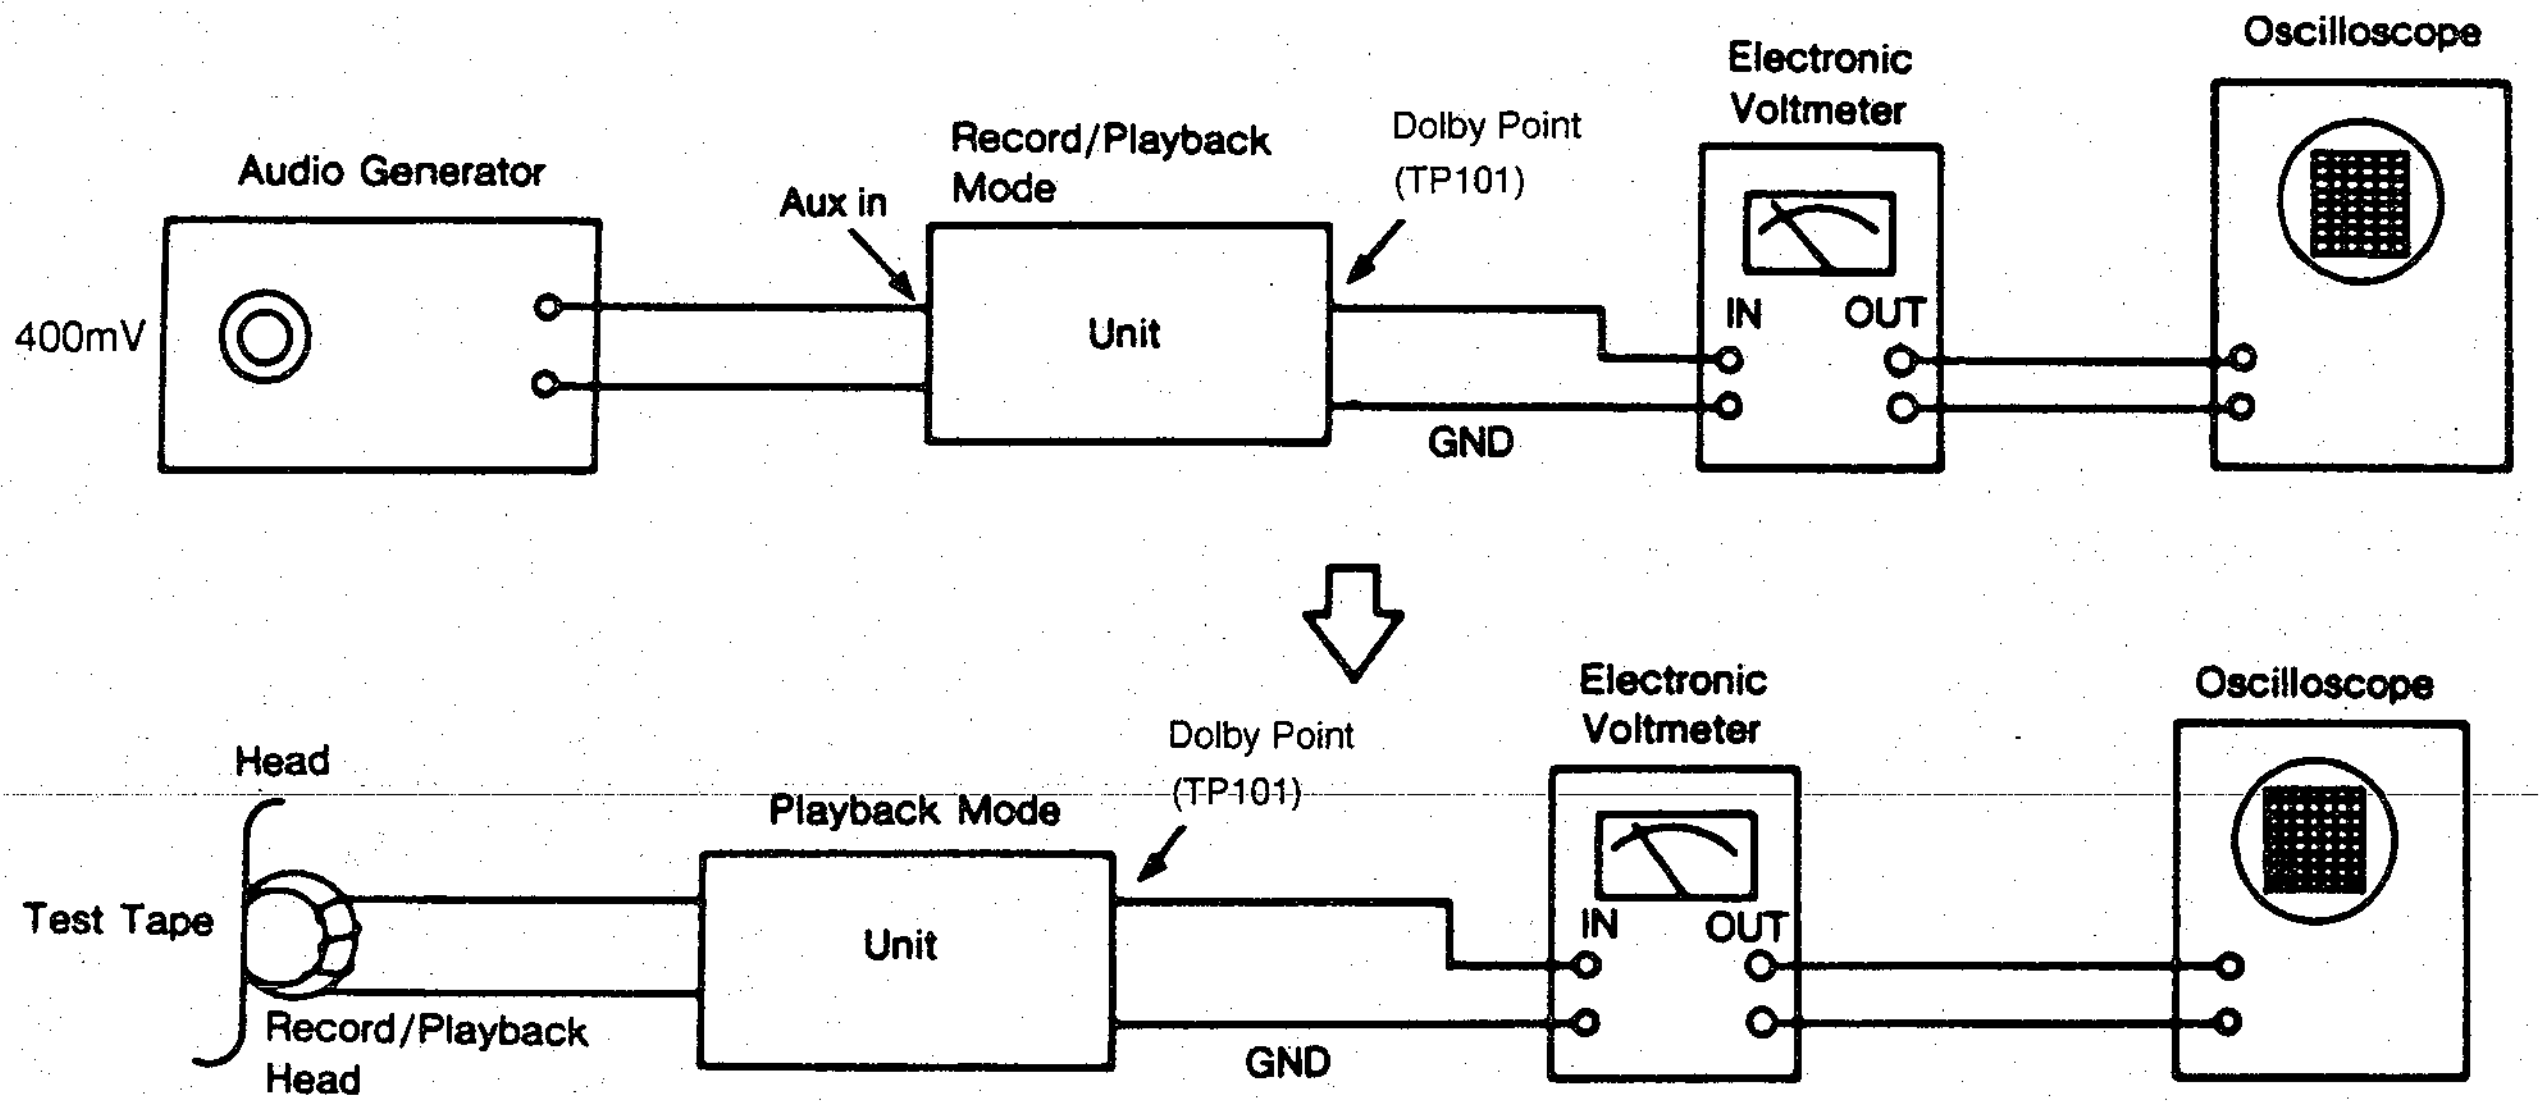
Audio Generator
400mV
Aux in
Record/Playback Mode
Unit
Dolby Point (TP101)
Electronic Voltmeter
IN
OUT
GND
Oscilloscope
Head
Test Tape
Record/Playback Head
Playback Mode
Unit
Dolby Point (TP101)
Electronic Voltmeter
IN
OUT
GND
Oscilloscope

Figure 7. Bias Adjustment Connection Diagram

CDP ADJUSTMENTS

1. Before adjusting, preset adjustment potentiometers VR801, 802, 804, and 805 center.

2. PLL ADJUSTMENT

1) Stop mode.
2) Connect digital frequency counter to TP803 (PLCK) and TP803 (GND).
3) Shortcircuit TP802 (ASY) and TP802 (GND).
4) Adjust VR805 so that the frequency counter reading becomes 4.4MHz (±10kHz).
5) Opencircuit TP802 (ASY) and TP802 (GND).

3. TRACKING BALANCE ADJUSTMENT

1) Connect the oscilloscope to TP804 (pin④-TEO) and TP804 (pin②-Vref).
2) Place test disc (YEDS-18) on turntable and play the music number 12.
3) Minimize volume VR804.
4) Adjust VR801 so that the amplitude above and below the zero DC line becomes equal (amplitude A=B).
5) Preset adjustment potentiometer VR803 center again.

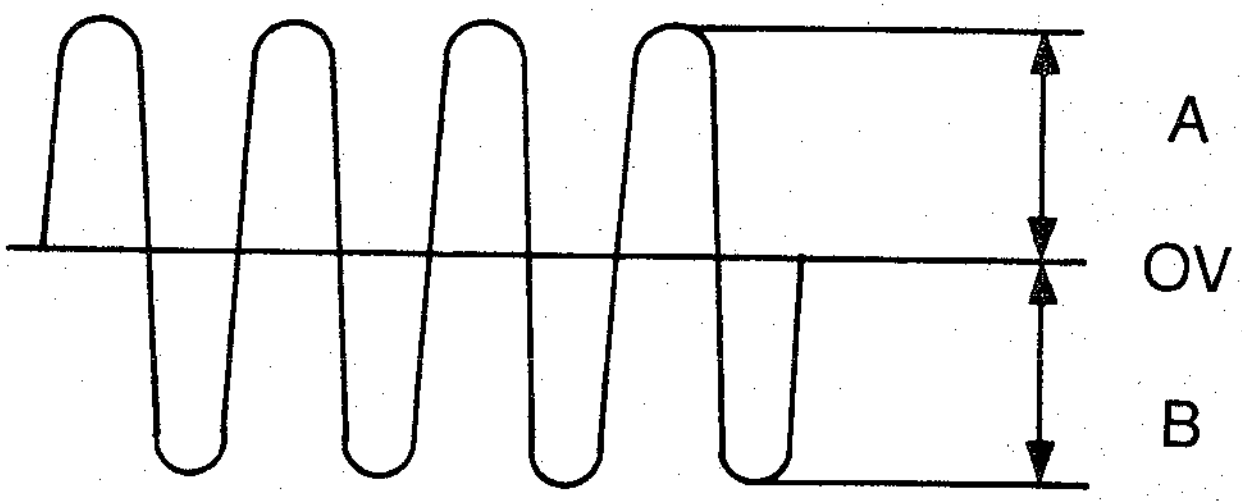

A=B

4. FOCUS OFFSET ADJUSTMENT (You have to use 10:1 prove)

1) Connect oscilloscope to TP801(RF) and TP801(Vref).
2) Put unit into play mode.
3) Adjust VR802 so that eye pattern become clear and waveform (Vp-p) is maximum.
4) Stop mode.
5) Connect oscilloscope to TP804 (pin①-FEO) and TP804 (pin②-Vref).
6) Confirm the oscilloscope reading i) Less than 200mV-OK
   ii) More than 200mV-readjust VR802 200mv.

5. TRACKING GAIN ADJUSTMENT

1) Connect a oscilloscope to PN802 (pin②-TAC⊕) and PN802 (pin③-TAC⊖).
2) Insert test disc and put unit into play mode on track.
3) Adjust VR804 so that the waveform on the oscilloscope becomes like below.

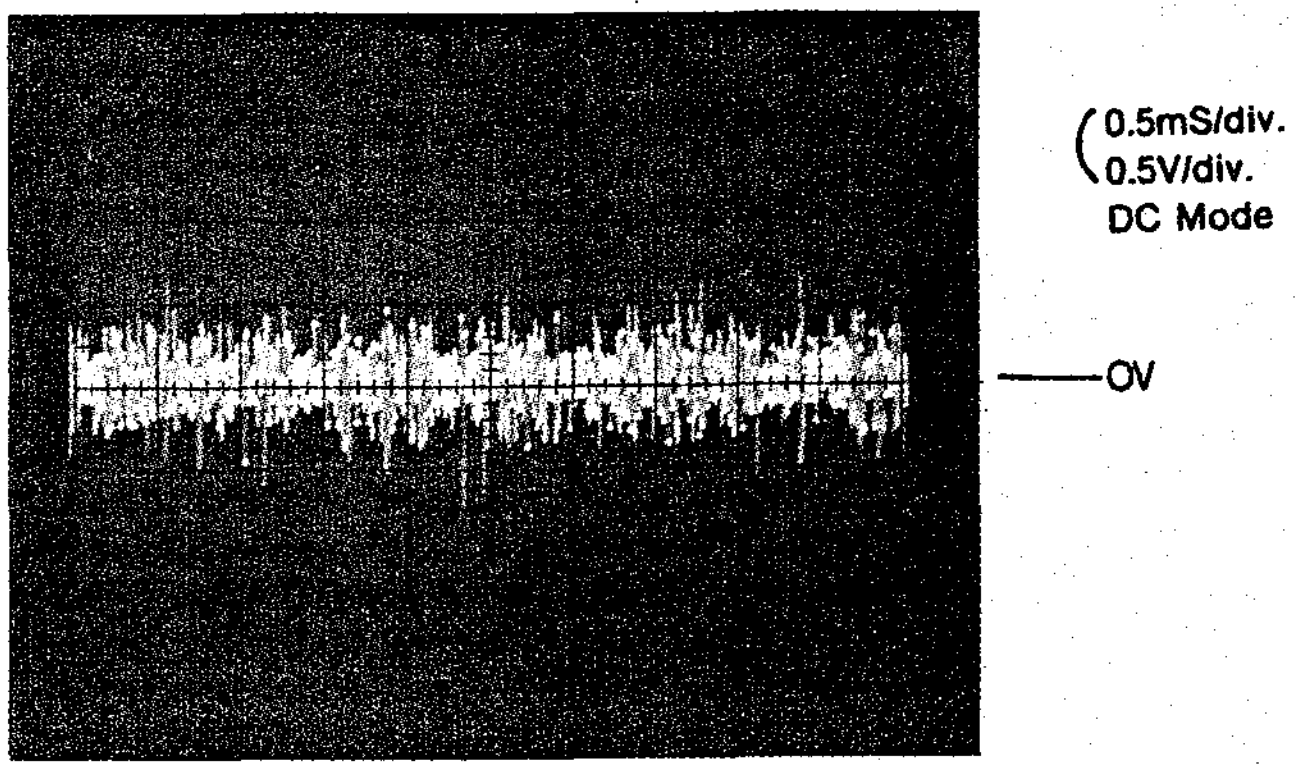

DESCRIPTION OF FUNCTIONS

1. RF AMPLIFIER

RF 1-V amplifiers (1) and (2) are converted to voltage from the signal current of pin photodiodes connected to PD1 and PD2 through the 58KΩ equivalent resistance. Furthermore, it is added in the RF summing amplifier and (A+B+C+D) is output at RFO. At this pin (RFO), the eye pattern can be checked.

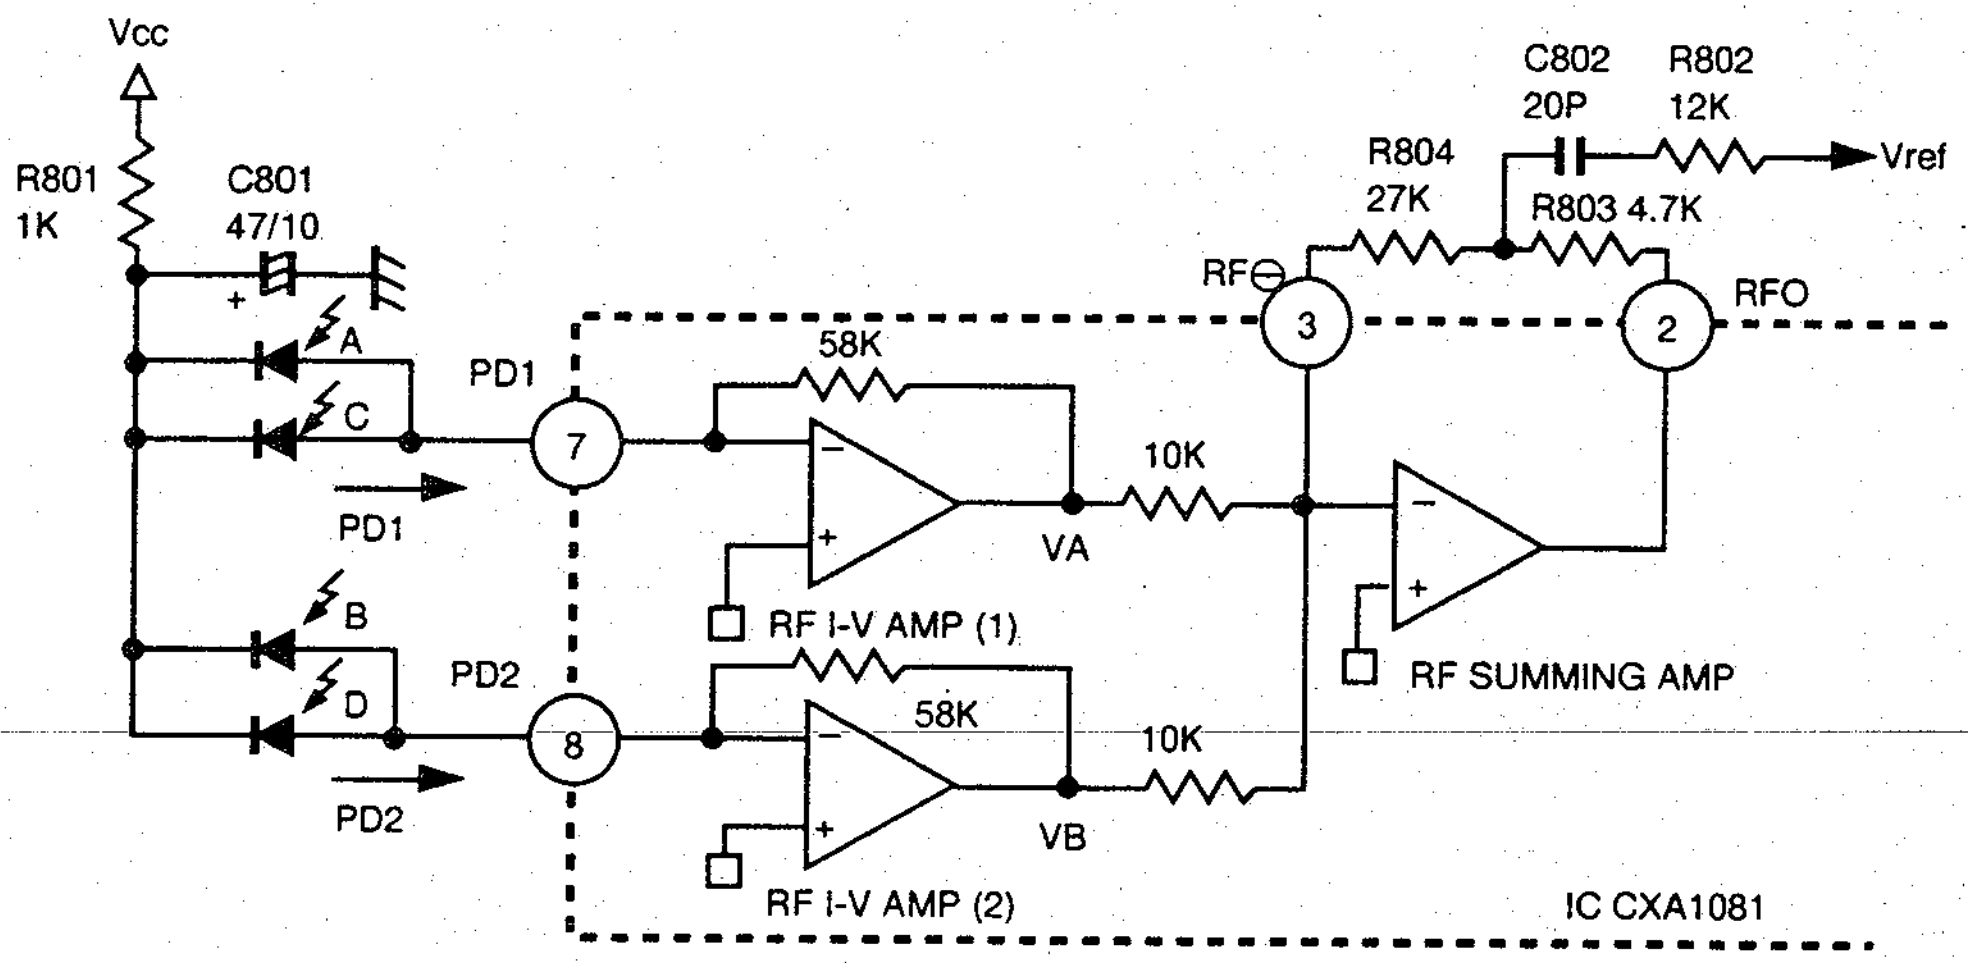
Vcc
R801
1K
C801
47/10
A
C
B
D
PD1
PD1
PD2
PD2
7
8
58K
58K
RF I-V AMP (1)
RF I-V AMP (2)
VA
VB
10K
10K
RF
3
R804
27K
C802
20P
R802
12K
Vref
R803 4.7K
2
RFO
RF SUMMING AMP
IC CXA1081

The RF amplifier output voltage (low-frequency) is $V_{RFO}=2.2\times(V_A+V_B)=127.6K\Omega\times(iPD1+iPD2)$.(at RFO)

2. FOCUS ERROR AMPLIFIER

The Focus Error Amplifier is the difference between RF 1-V amplifier (1) output (A+C) and RF 1-V amplifier (2) output (B+D). The output becomes (A+C-B-D).

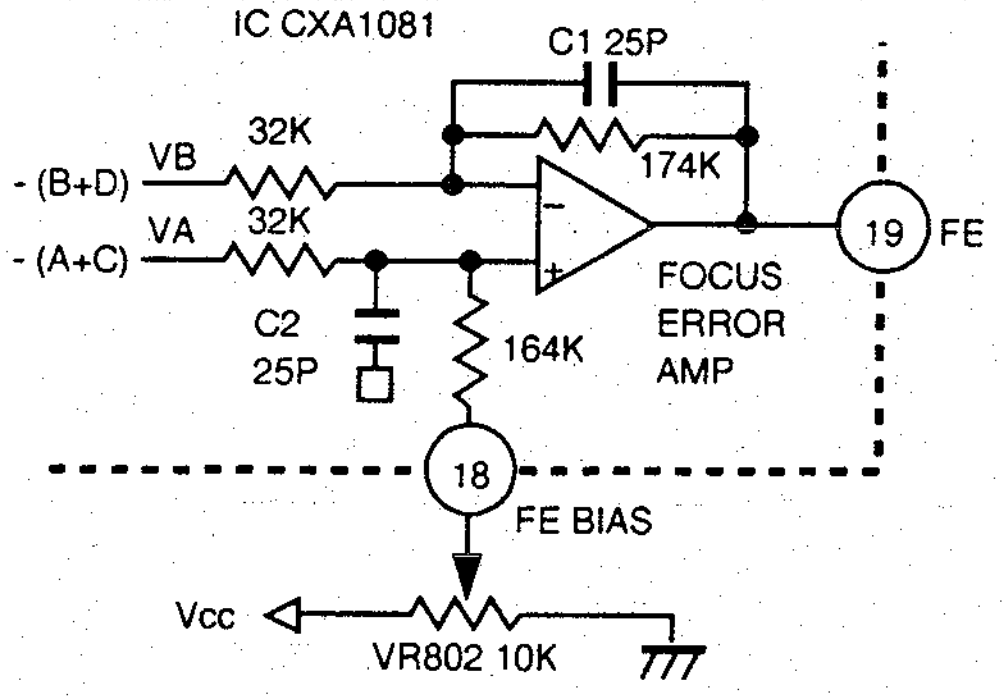
IC CXA1081
C1 25P
- (B+D)
VB
32K
- (A+C)
VA
32K
174K
C2
25P
164K
FOCUS
ERROR
AMP
19
FE
18
FE BIAS
Vcc
VR802 10K

3. TRACKING ERROR AMPLIFIER

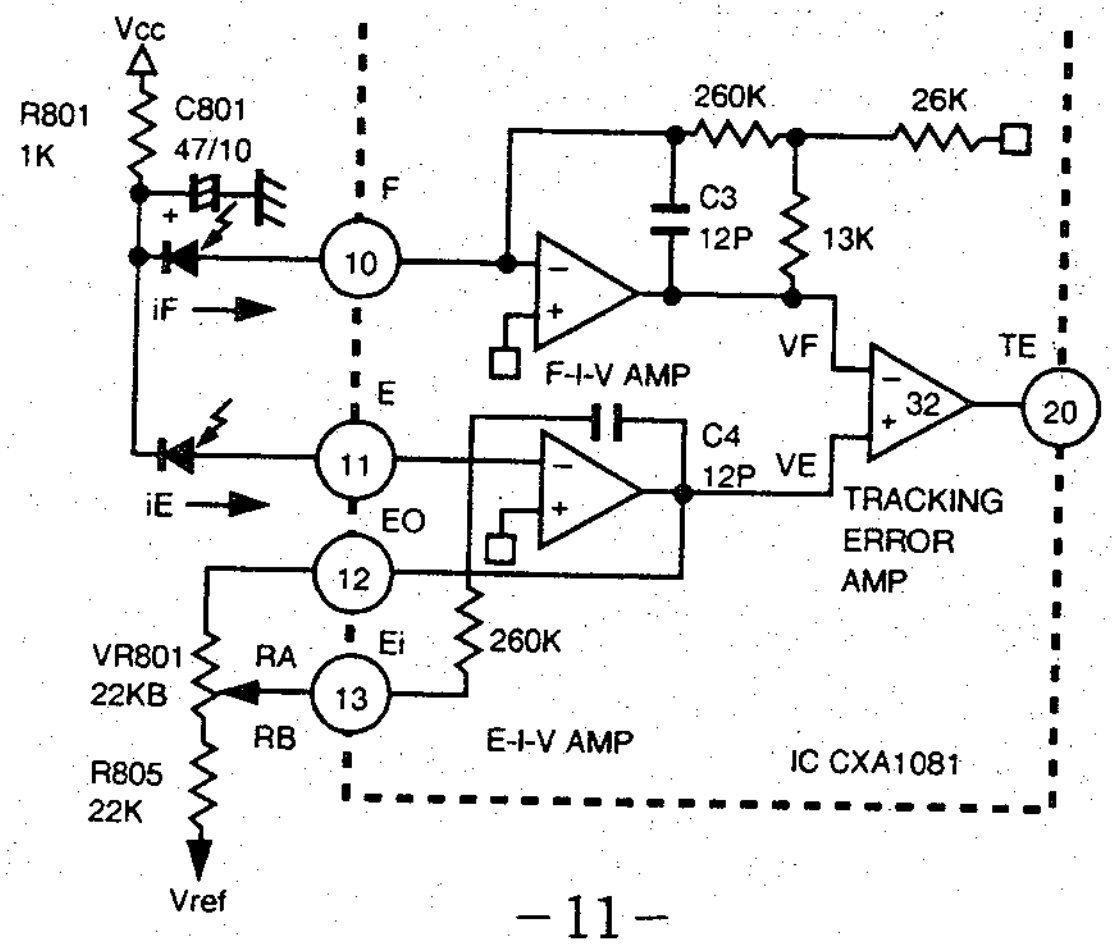
Vcc
R801
1K
C801
47/10
F
10
iF
260K
26K
C3
12P
13K
F-I-V AMP
VF
TE
32
20
E
11
iE
C4
12P
VE
TRACKING
ERROR
AMP
EO
12
VR801
22KB
RA
Ei
13
260K
RB
E-I-V AMP
R805
22K
Vref
IC CXA1081

E I-V amplifier and F I-V amplifier are converted to voltage from the signal current of pin photodiode connected : E and F. The E and F I-V amplifiers output voltage is,

V_F=iF × 403KΩ, and
V_E+iE × 260KΩ × R_A/ (R_B+22K)+(R_A+260K).

The tracking error amplifier is the difference between the E I-V amplifier ouput and the F I-V amplifier output, this output is (E-F).

V_{TE}=(V_E-V_F) × 3.2
=(iE-iF) × 1290KΩ

4. MIRROR CIRCUIT

This circuit, after amplifying the RFI signal, holds its bottom and peak. The peak hold is done with a time constant able to track down a 30kHz traverse and the bottom hold. This is done with a time constant able to track down envelope fluctuations in the revolving cycle.

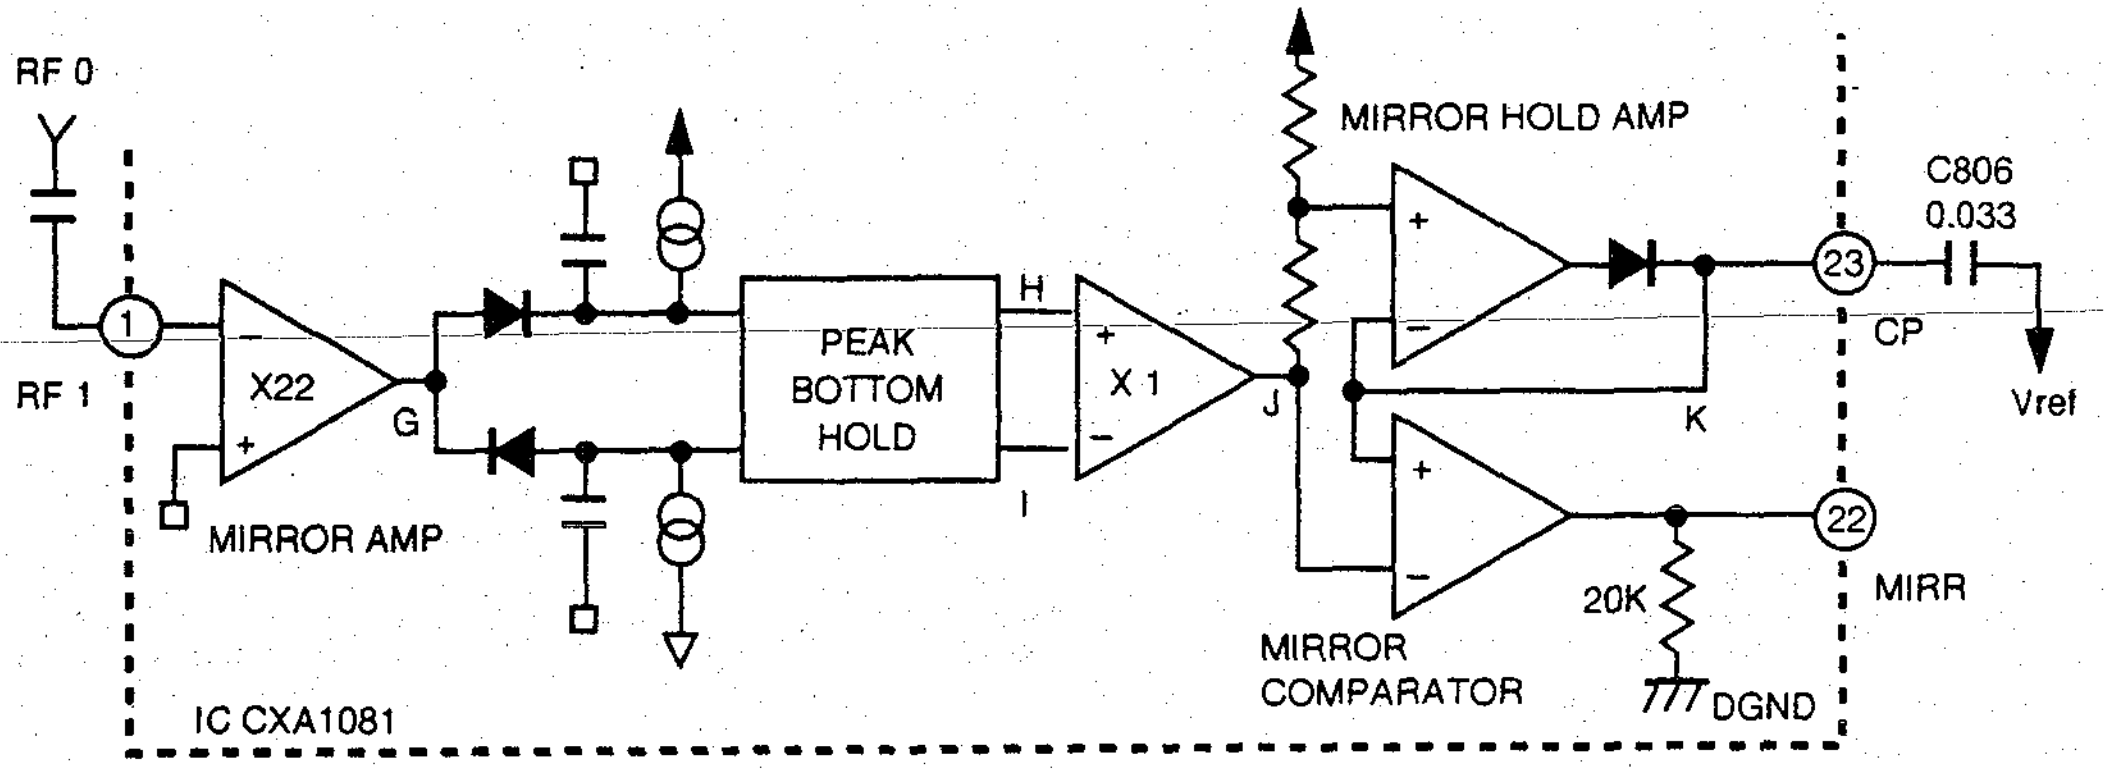
RF 0
RF 1
1
X22
G
MIRROR AMP
IC CXA1081
PEAK BOTTOM HOLD
H
I
X 1
J
MIRROR HOLD AMP
K
MIRROR COMPARATOR
20K
DGND
23
22
C806
0.033
CP
Vref
MIRR

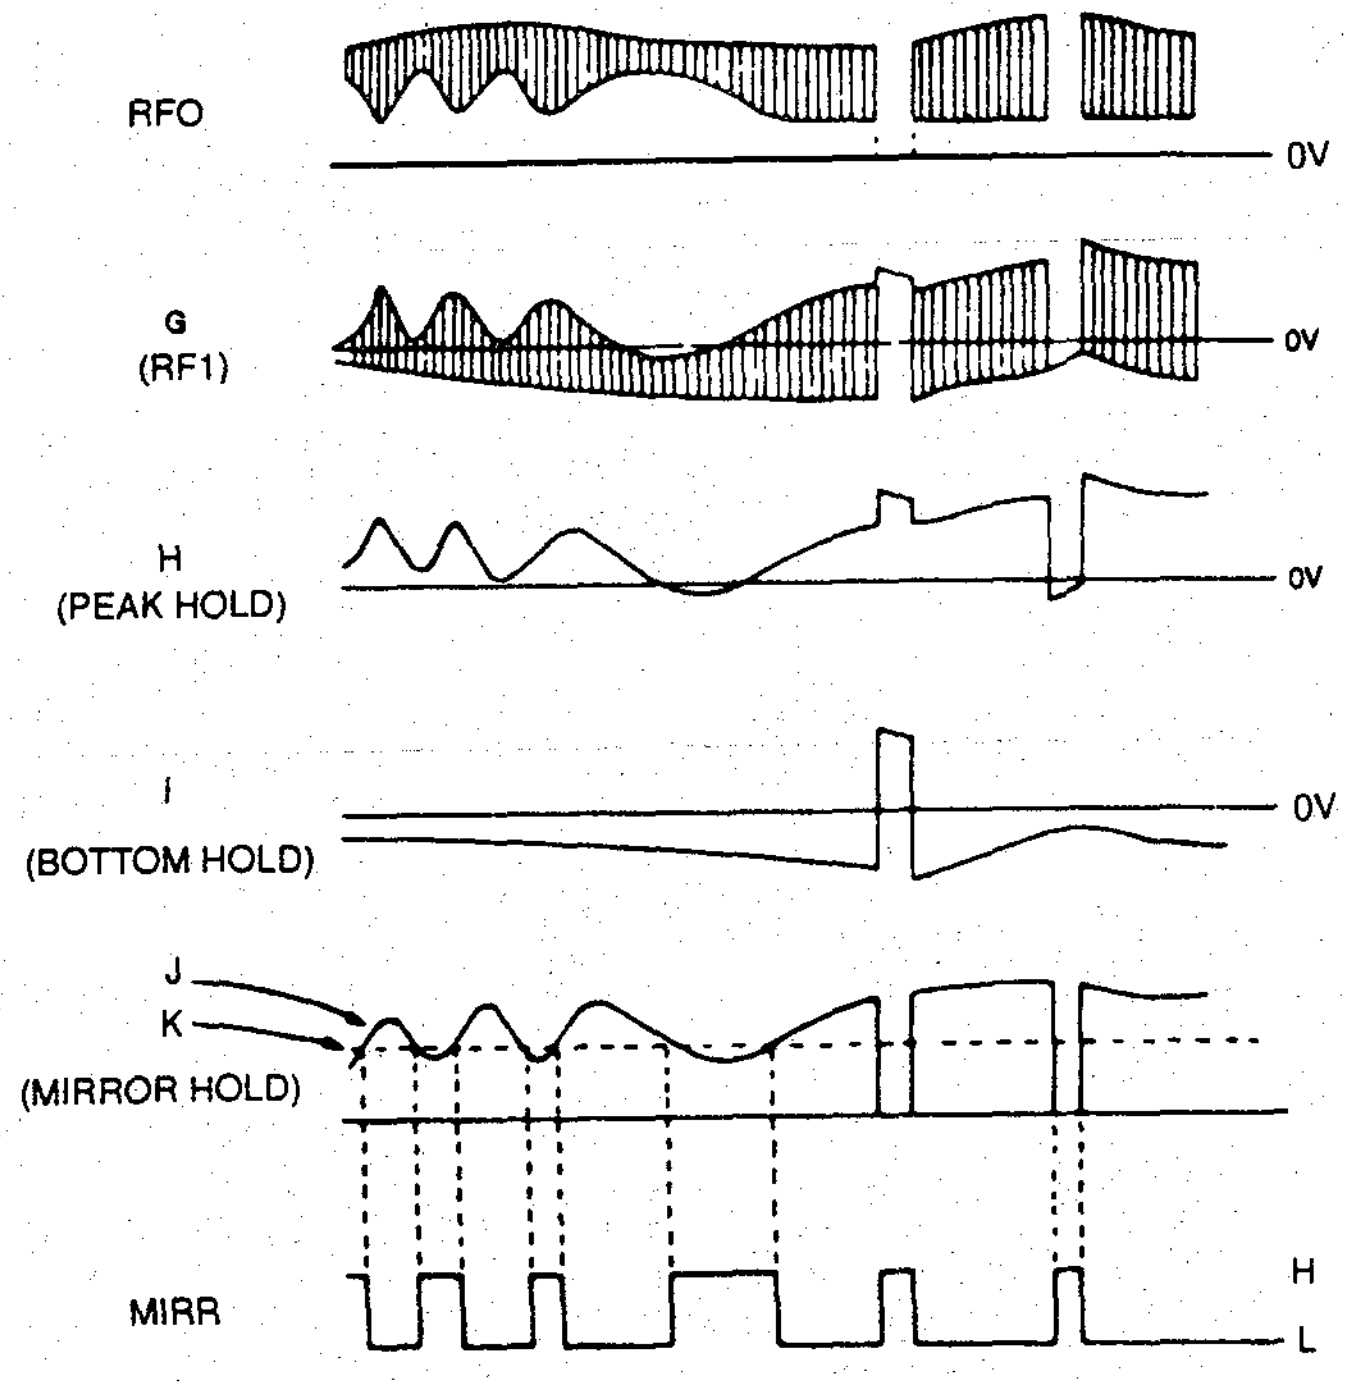

With the differential amplification of these peak and bottom hold signals, H and I, the envelope signal J (demodulated to DC) is obtained. Two-thirds of the peak value of this signal J is held with a large time constant for the signal K. When K is compared with J, a mirror output is obtained. That is, the mirror output gives "L" on the disc track, "H" between tracks (mirror section) and also "H" in the defect detection. The time constant for the mirror hold must be sufficiently larger than that of the traverse signal.

5. FOCUS OK CIRCUIT

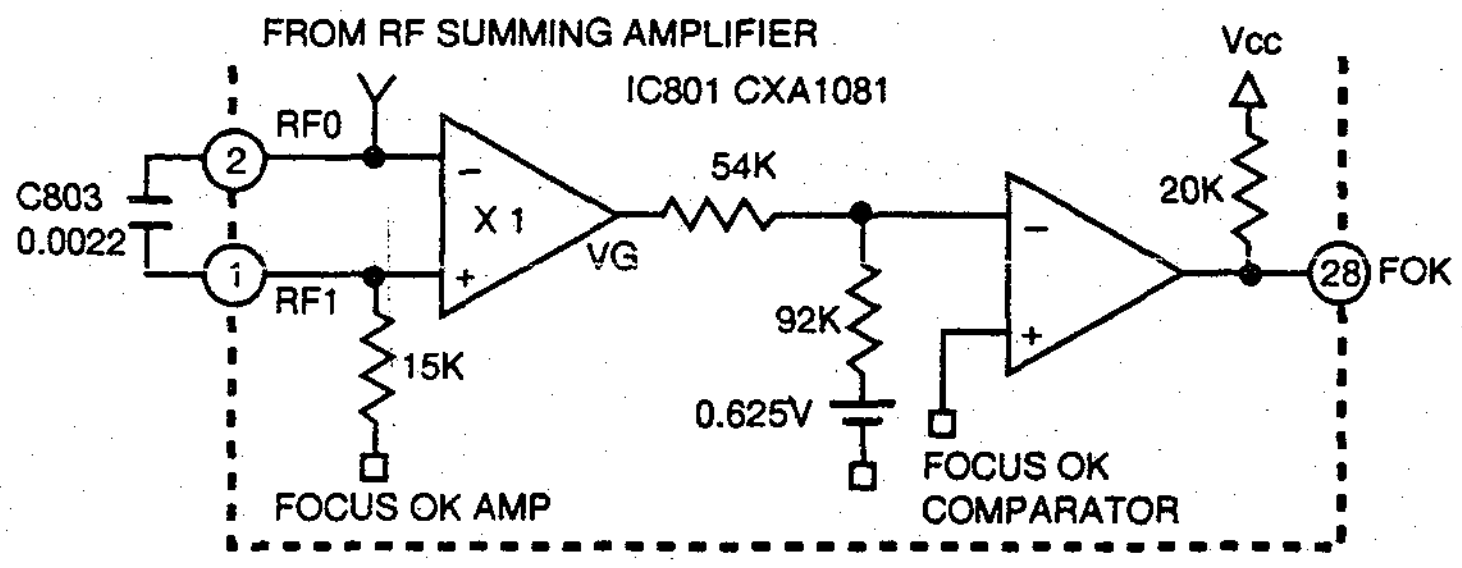
FROM RF SUMMING AMPLIFIER
IC801 CXA1081
Vcc
RFO
②
C803
0.0022
①
RF1
X 1
VG
54K
20K
㉘ FOK
92K
15K
0.625V
FOCUS OK AMP
FOCUS OK
COMPARATOR

The focus OK circuit generates a timing window to lock on the focus servo from a focus search status. Pin ① will get the HPF (High Pass Filter) output from an RF signal from Pin ②-the LPF (Low Pass Filter) output (opposit phase) for the focus OK amplifier output.

The focus OK amplifier output is inverted when $V_{RFI}-V_{RFO} \fallingdotseq -0.37V$.

C803 is for determining the time constants of HPF in the EFM comparator and mirror circuits as well as LPF in the focus OK amplifier. When 0.0022μF is selected for C803, fc (cut-off frequency)=1kHz, prevents the block error rate from degenerating as a damaged RF envelope results from the scratched disc, etc.

6. EFM COMPARATOR

The EFM comparator changes RF signal into a binary value. As the asymmetry generated due to variations in disc manufacturing cannot be eliminated by the AC coupling alone, the reference voltage of EFM comparator is controlled utilizing the fact that the generation probability of 1, 0 is 50% each in the binary EFM signals.

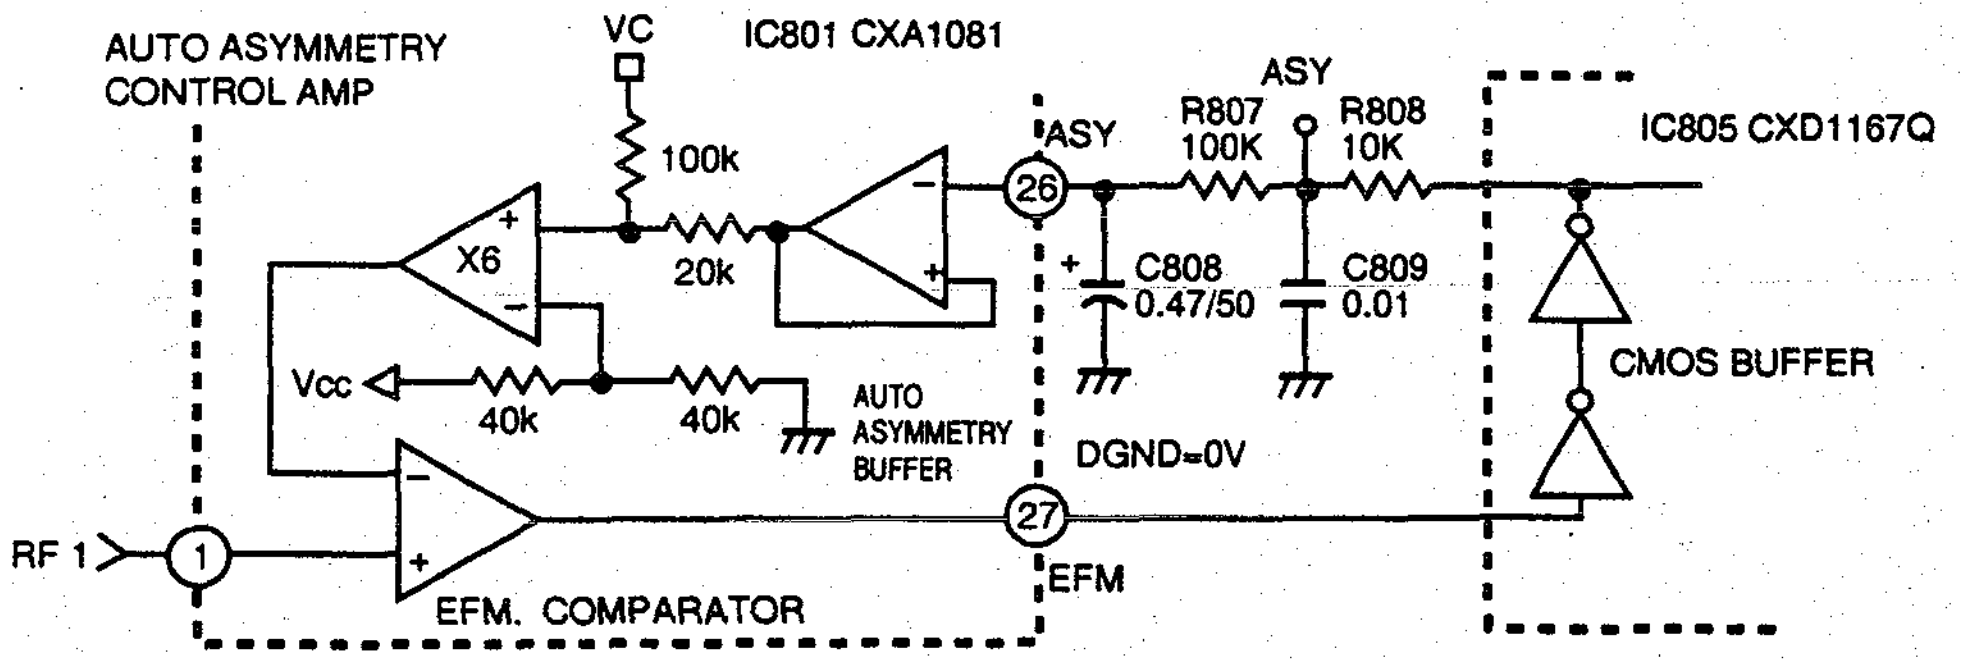
AUTO ASYMMETRY
CONTROL AMP
VC
IC801 CXA1081
100k
20k
X6
Vcc
40k
40k
AUTO
ASYMMETRY
BUFFER
ASY
㉖
ASY
R807
100K
R808
10K
C808
0.47/50
C809
0.01
DGND=0V
IC805 CXD1167Q
CMOS BUFFER
RF 1
①
㉗
EFM
EFM. COMPARATOR

As this comparator is a current SW type, each of the H and L levels does not equal the power supply voltage, requiring feedback through a CMOS buffer.

R807, R808, and C809 form a LPF to obtain $(V_{CC}+DGND)/2V$. When fc (out-off frequency) is made more than 500Hz, the EFM low-frequency component leaks dably, degenerating the block error rate.

7. DEFECT CIRCUIT

The RFI signal bottom, after being inverted, is held with two time constants, one long and one short. The short time-constant bottom hold is done for a disc mirror defect more than 0.1m sec. The long time-constant bottom hold is done with the mirror level prior to the defect. By differentiating this with a capacitor coupling and shifting the level, both signals are compared to generate the mirror defect detection signal.

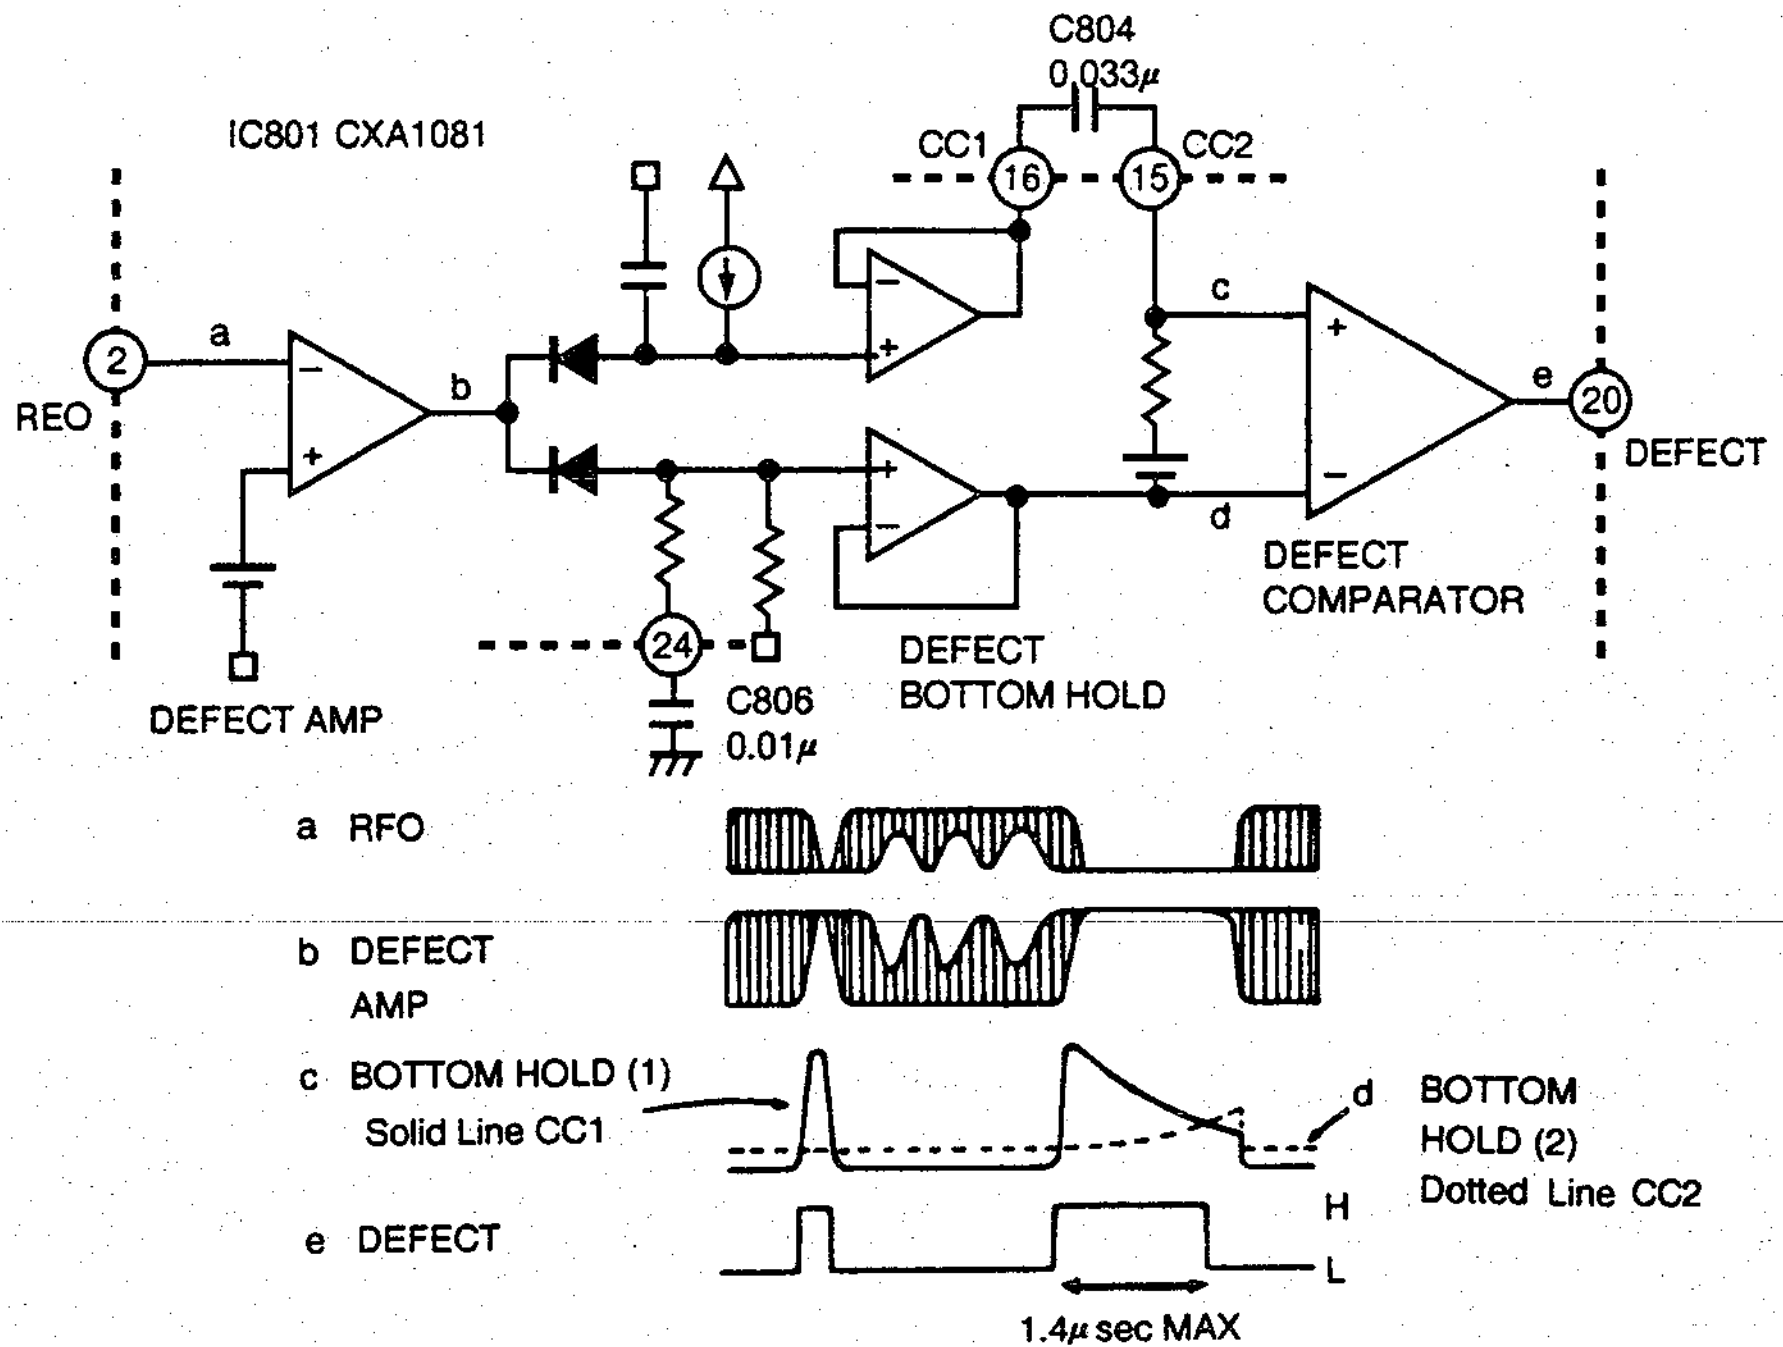
C804
0.033μ
IC801 CXA1081
CC1
16
15
CC2
c
a
2
REO
b
e
20
DEFECT
d
DEFECT
COMPARATOR
24
DEFECT
BOTTOM HOLD
DEFECT AMP
C806
0.01μ
a RFO
b DEFECT
AMP
c BOTTOM HOLD (1)
Solid Line CC1
d
BOTTOM
HOLD (2)
Dotted Line CC2
H
e DEFECT
L
1.4μ sec MAX

8. FOCUS SERVO SYSTEM

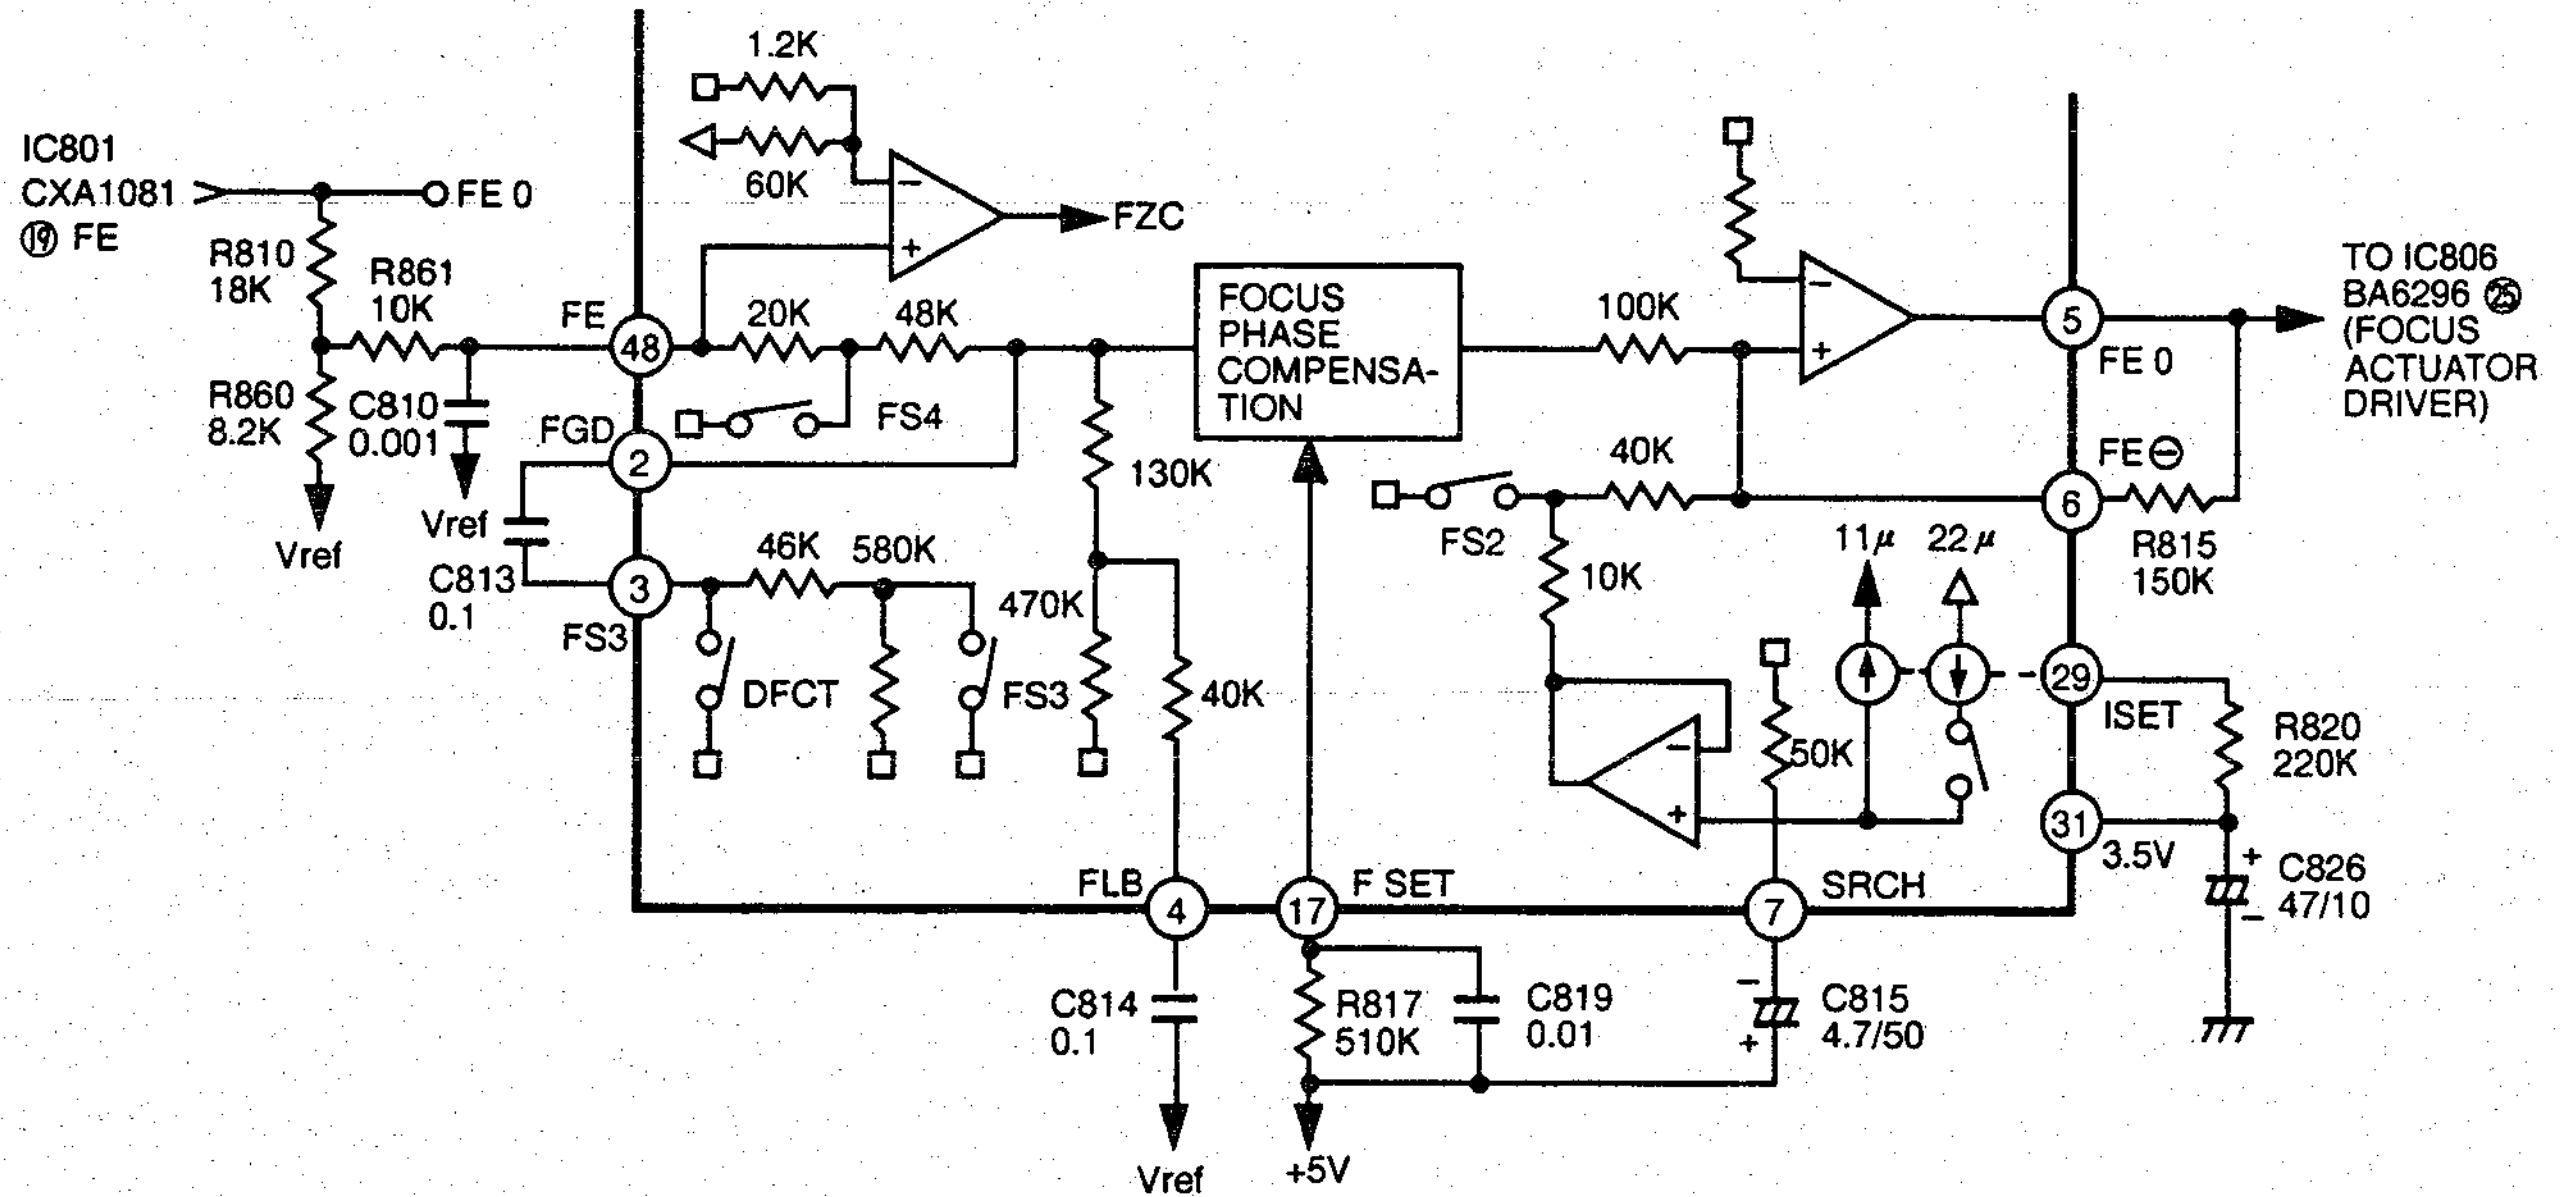
1.2K
60K
FZC
IC801
CXA1081
⑲ FE
FE 0
R810
18K
R861
10K
FE
48
20K
48K
FOCUS
PHASE
COMPENSA-
TION
100K
5
FE 0
TO IC806
BA6296 ㉕
(FOCUS
ACTUATOR
DRIVER)
R860
8.2K
C810
0.001
FGD
2
FS4
40K
FE⊖
6
Vref
Vref
130K
FS2
R815
150K
C813
0.1
3
FS3
46K
580K
470K
10K
11μ
22μ
DFCT
FS3
40K
29
ISET
R820
220K
50K
31
3.5V
C826
47/10
FLB
4
17
F SET
7
SRCH
C814
0.1
R817
510K
C819
0.01
C815
4.7/50
Vref
+5V

The above is a block diagram of the focus servo system. When FS3 is switched on, the high frequency gain can be reduced by forming a low frequency time constant through a capacitor connected across pins 2 and 3 and the internal resistor.

The capacitor across the pin 10 and GND has a time constant to raise the low frequency usually playback condition. The peak frequency of the focus phase compensation is inversely proportional to the resistor connected to pin 17 (about 1.2kHz when the resistor is 510KΩ).

The focus search peak becomes about ±1.1Vp-p with the above constant. The peak is inversely proportional to the resistor connected across the pins 29 and 31. However, when this resistor is varied, the peaks of track jump and sled kick also vary.

The FZC comparator invert input is set to 2% of the difference between the reference voltage Vcc and VC (pin 1) : 2%×(Vcc-VC).

9. TRACKING SERVO SYSTEM

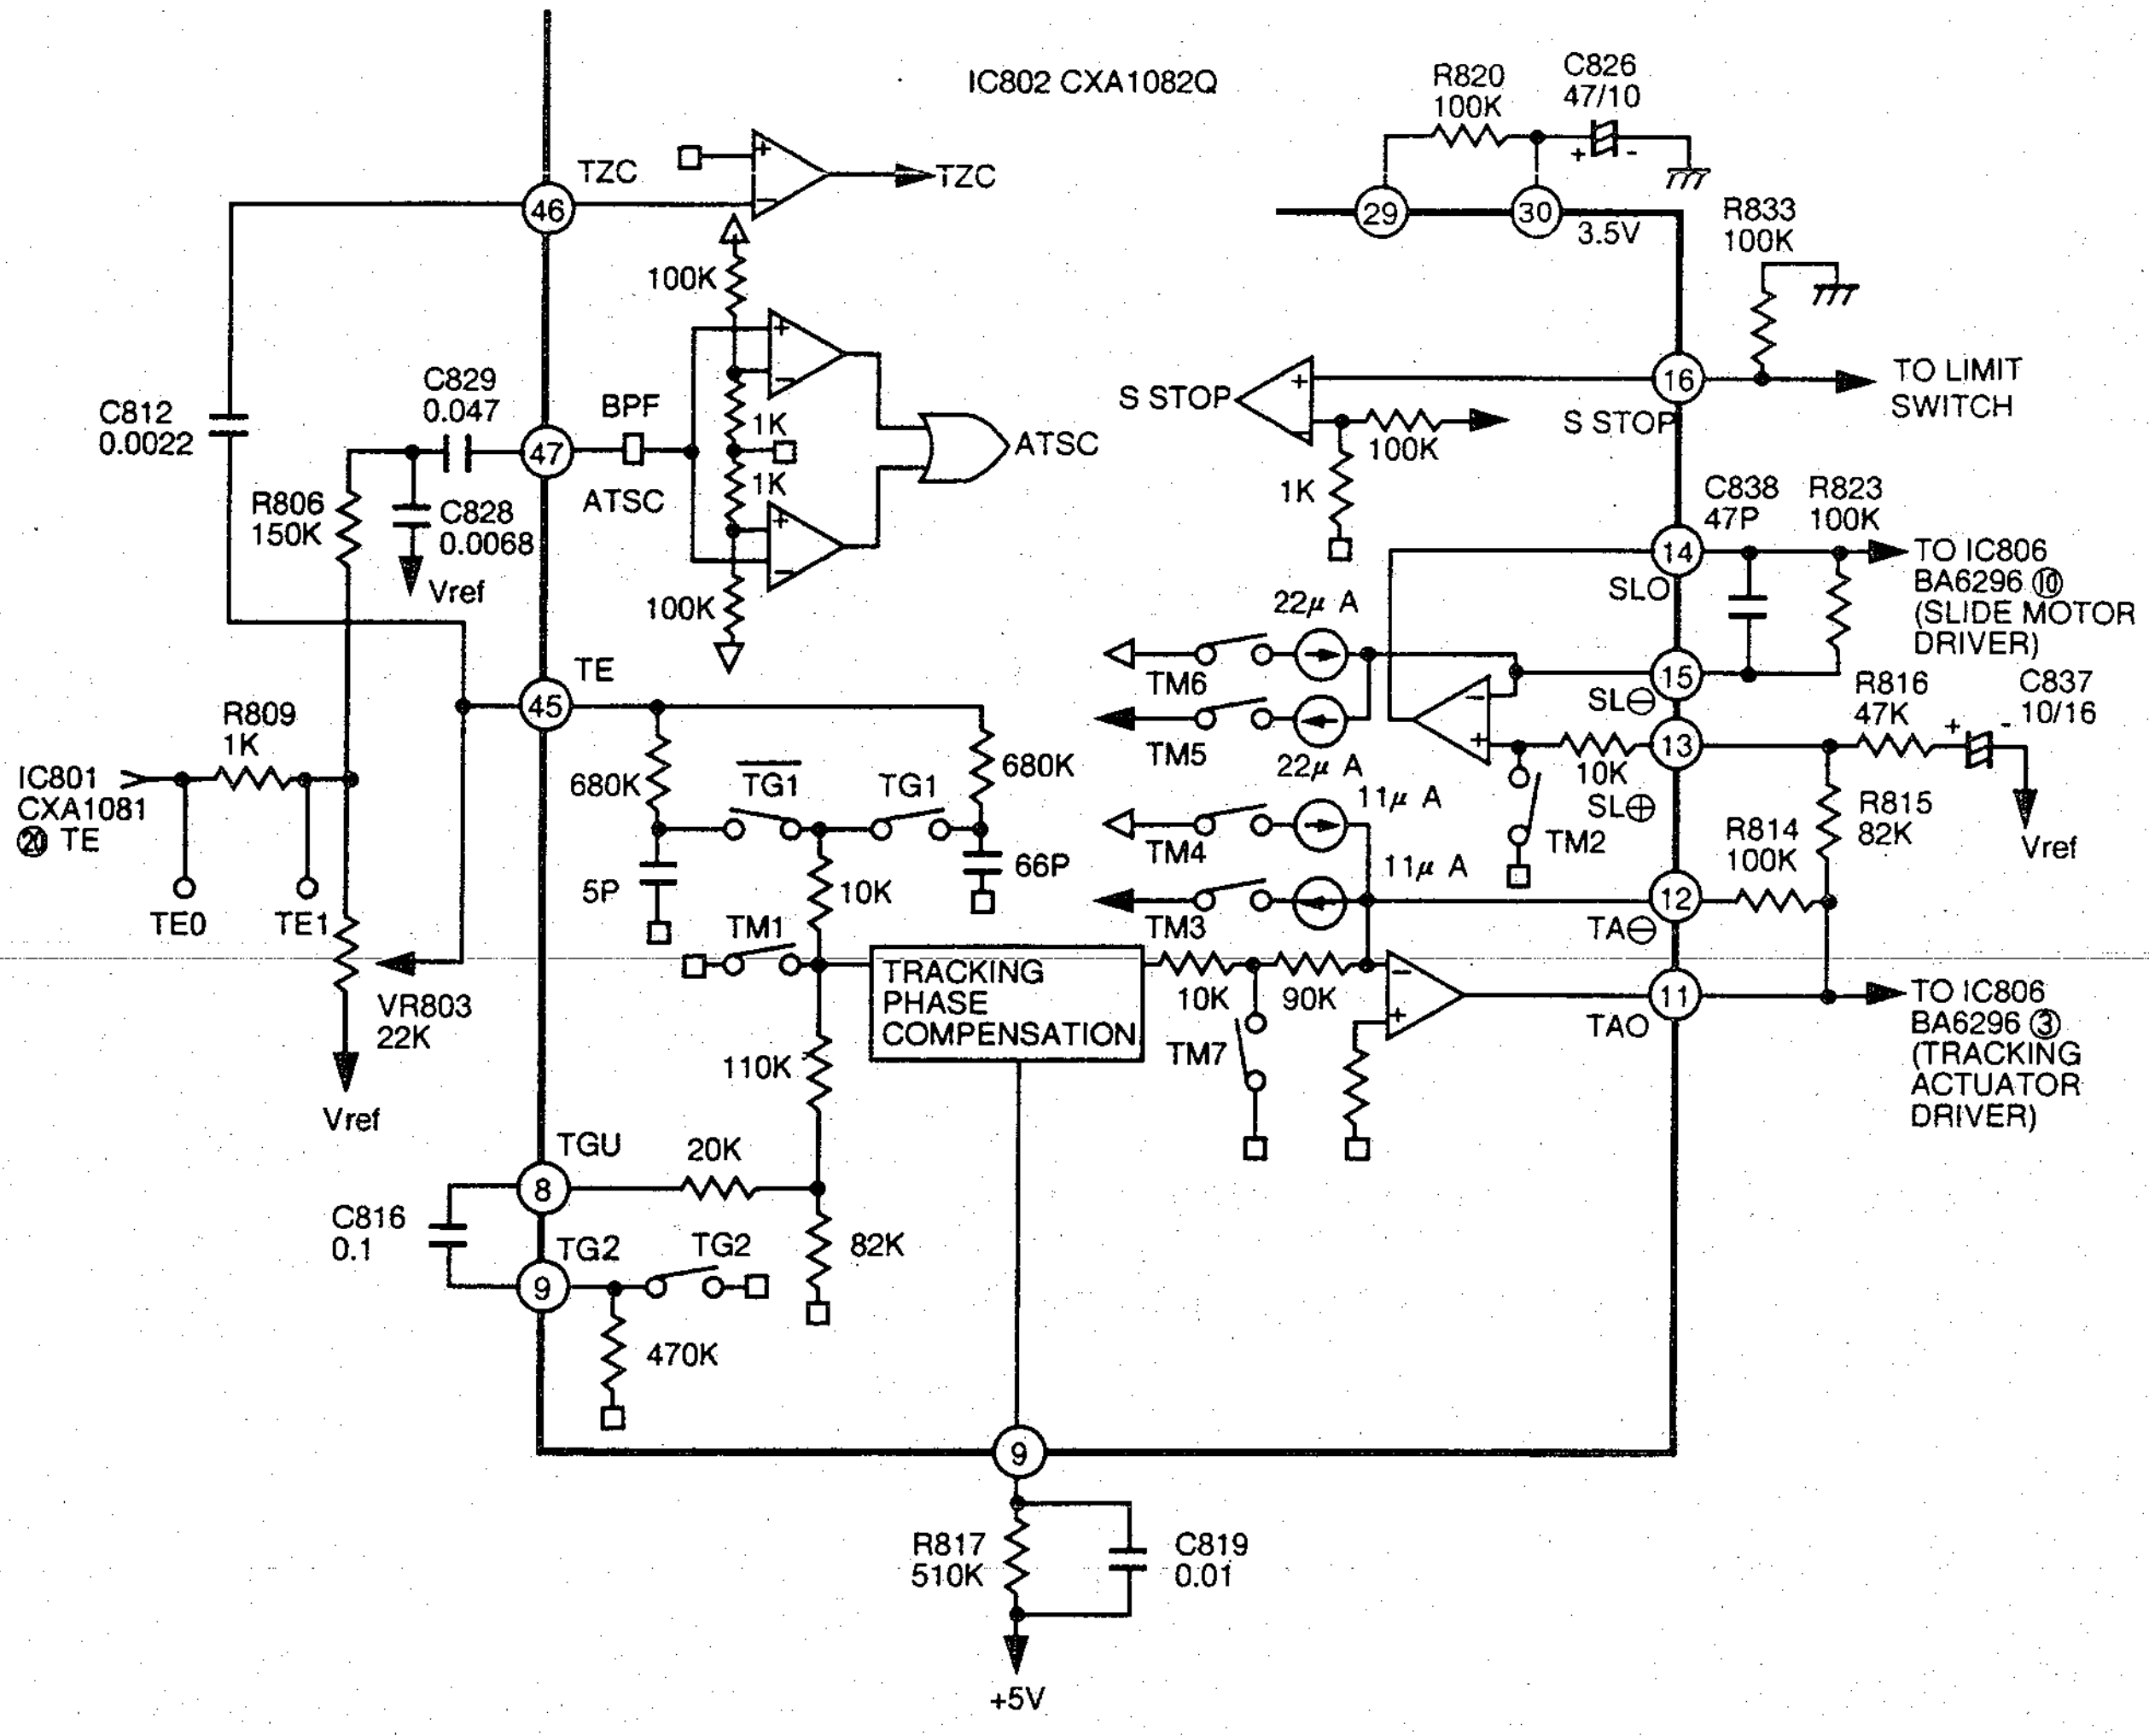
IC802 CXA1082Q
R820 100K
C826 47/10
29
30
3.5V
R833 100K
TZC
TZC
46
100K
C812 0.0022
C829 0.047
BPF
47
1K
1K
ATSC
ATSC
R806 150K
C828 0.0068
Vref
100K
S STOP
S STOP
100K
1K
16
TO LIMIT SWITCH
C838 47P
R823 100K
14
SLO
TO IC806 BA6296 ⑩ (SLIDE MOTOR DRIVER)
22µ A
TM6
TM5
22µ A
SL⊖
15
R816 47K
C837 10/16
13
10K
SL⊕
TM2
11µ A
11µ A
TM4
TM3
R815 82K
R814 100K
Vref
12
TA⊖
TE
45
R809 1K
IC801 CXA1081 ⑳ TE
TE0
TE1
680K
TG1
TG1
680K
5P
10K
66P
TM1
TRACKING PHASE COMPENSATION
10K
90K
TM7
11
TAO
TO IC806 BA6296 ③ (TRACKING ACTUATOR DRIVER)
VR803 22K
Vref
110K
TGU
20K
8
C816 0.1
TG2
TG2
9
82K
470K
9
R817 510K
C819 0.01
+5V

The above is a block diagram of the tracking sled servo system.

The capacitor across pins 8 and 9 has a time constant to lower the high frequency when TG2 is switched off.

The tracking phase compensation peak frequency is inversely proportional to the resistor connected to pin 17 (about 1.2kHz when the resistor is 510KΩ).

For a tracking jump in the FWD or REV direction, TM3 or TM4 are set to ON. At this time, the peak voltage fed to the tracking coil is determined by the TM3 and TM4 current values and the feedback resistor from pin 12. That is :

Track jump peak voltage=TM3 (TM4) current value × feedback resistor value

The FWD or REV sled kick is done by setting TM5 or TM6 to ON. At this time, the peak voltage added to the sled motor is determined by the TM5 or TM6 current value and the feedback resistor from pin 15.

Sled jump peak voltage=TM5 (TM6) current value × feedback resistor value

Each SW current value is determined by the resistor connected to pins 29 and 31.

When the resistor is at about 120KΩ.

TM3 or TM4 is ±11µ A and TM5 or TM6 is ±22µ A

This current value is almost inversely proportional to the resistor, variable within a range of about 5 to 40µ A for TM3.

S STOP is the ON/OFF detection signal for the limit SW of the sled motor's innermost circumference.

10. SPINDLE SERVO AND LPF

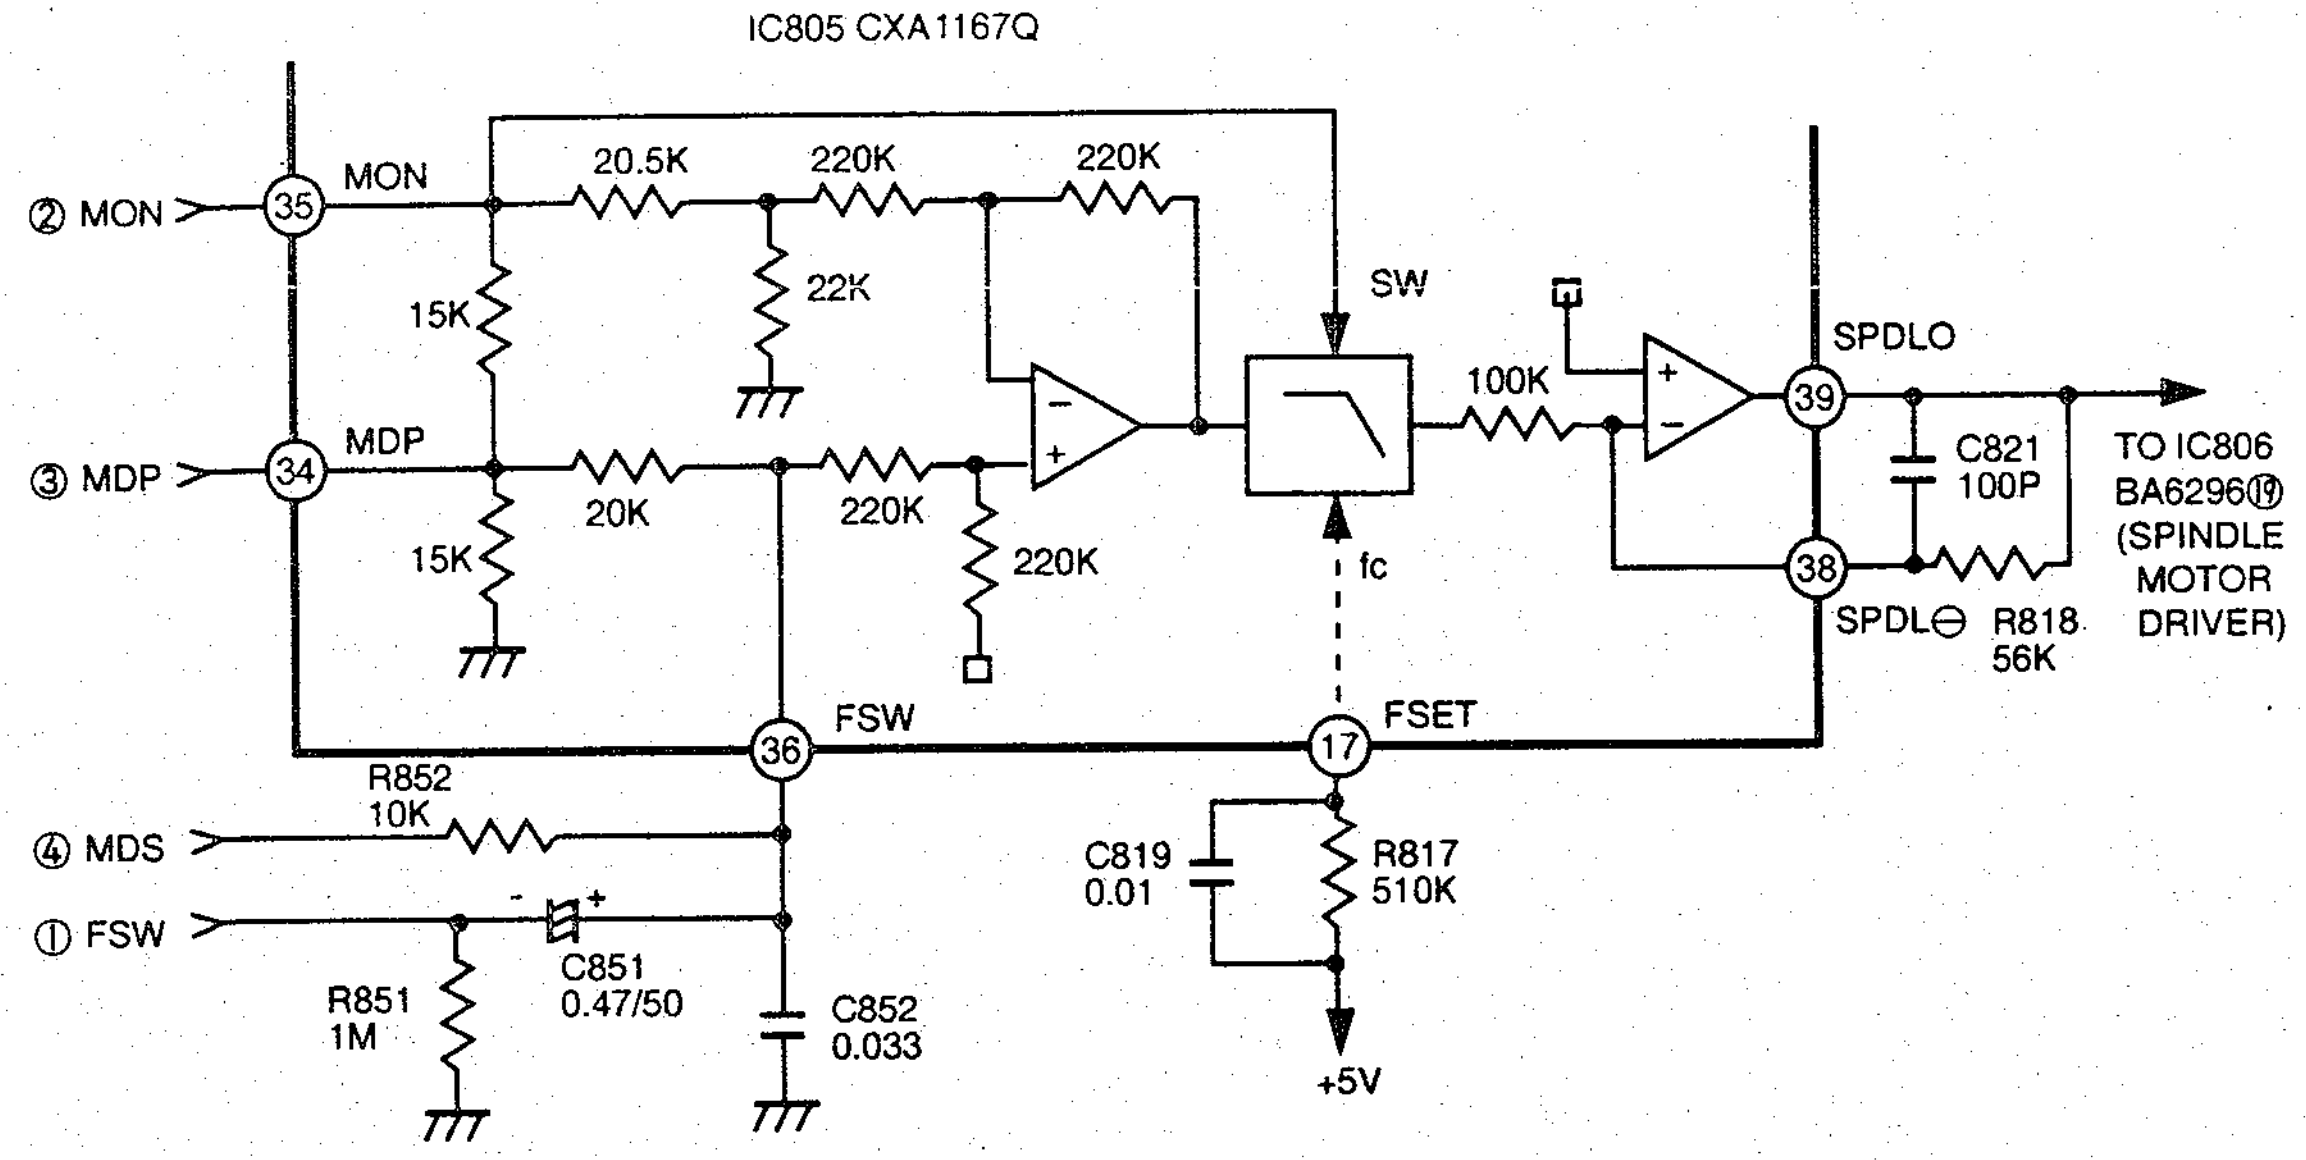
IC805 CXA1167Q
② MON
35
MON
20.5K
220K
220K
15K
22K
SW
100K
SPDLO
39
C821
100P
TO IC806
BA6296⑲
(SPINDLE
MOTOR
DRIVER)
③ MDP
34
MDP
20K
220K
220K
15K
fc
38
SPDL⊖
R818
56K
FSW
36
FSET
17
R852
10K
④ MDS
① FSW
C851
0.47/50
R851
1M
C852
0.033
C819
0.01
R817
510K
+5V

The 200HZ LPF is formed with 0.033μ Fand 10KΩ connected to pin 36 and the secondary LPF is formed with the built-in LPF (fc up to 200Hz with 510KΩ for pin 17), and the carrier component of the CLV servo error signals MDS and MDP is eliminated.

In the CLV-S mode, FSW becomes L and the pin 36 LPF fc lowers, strengthening the filter further. With the pin 17 resistor connected to Vcc, fc does not vary with power supply voltage fluctuations.

11. VCC LOOP FILTER & 8.64MHz VCO

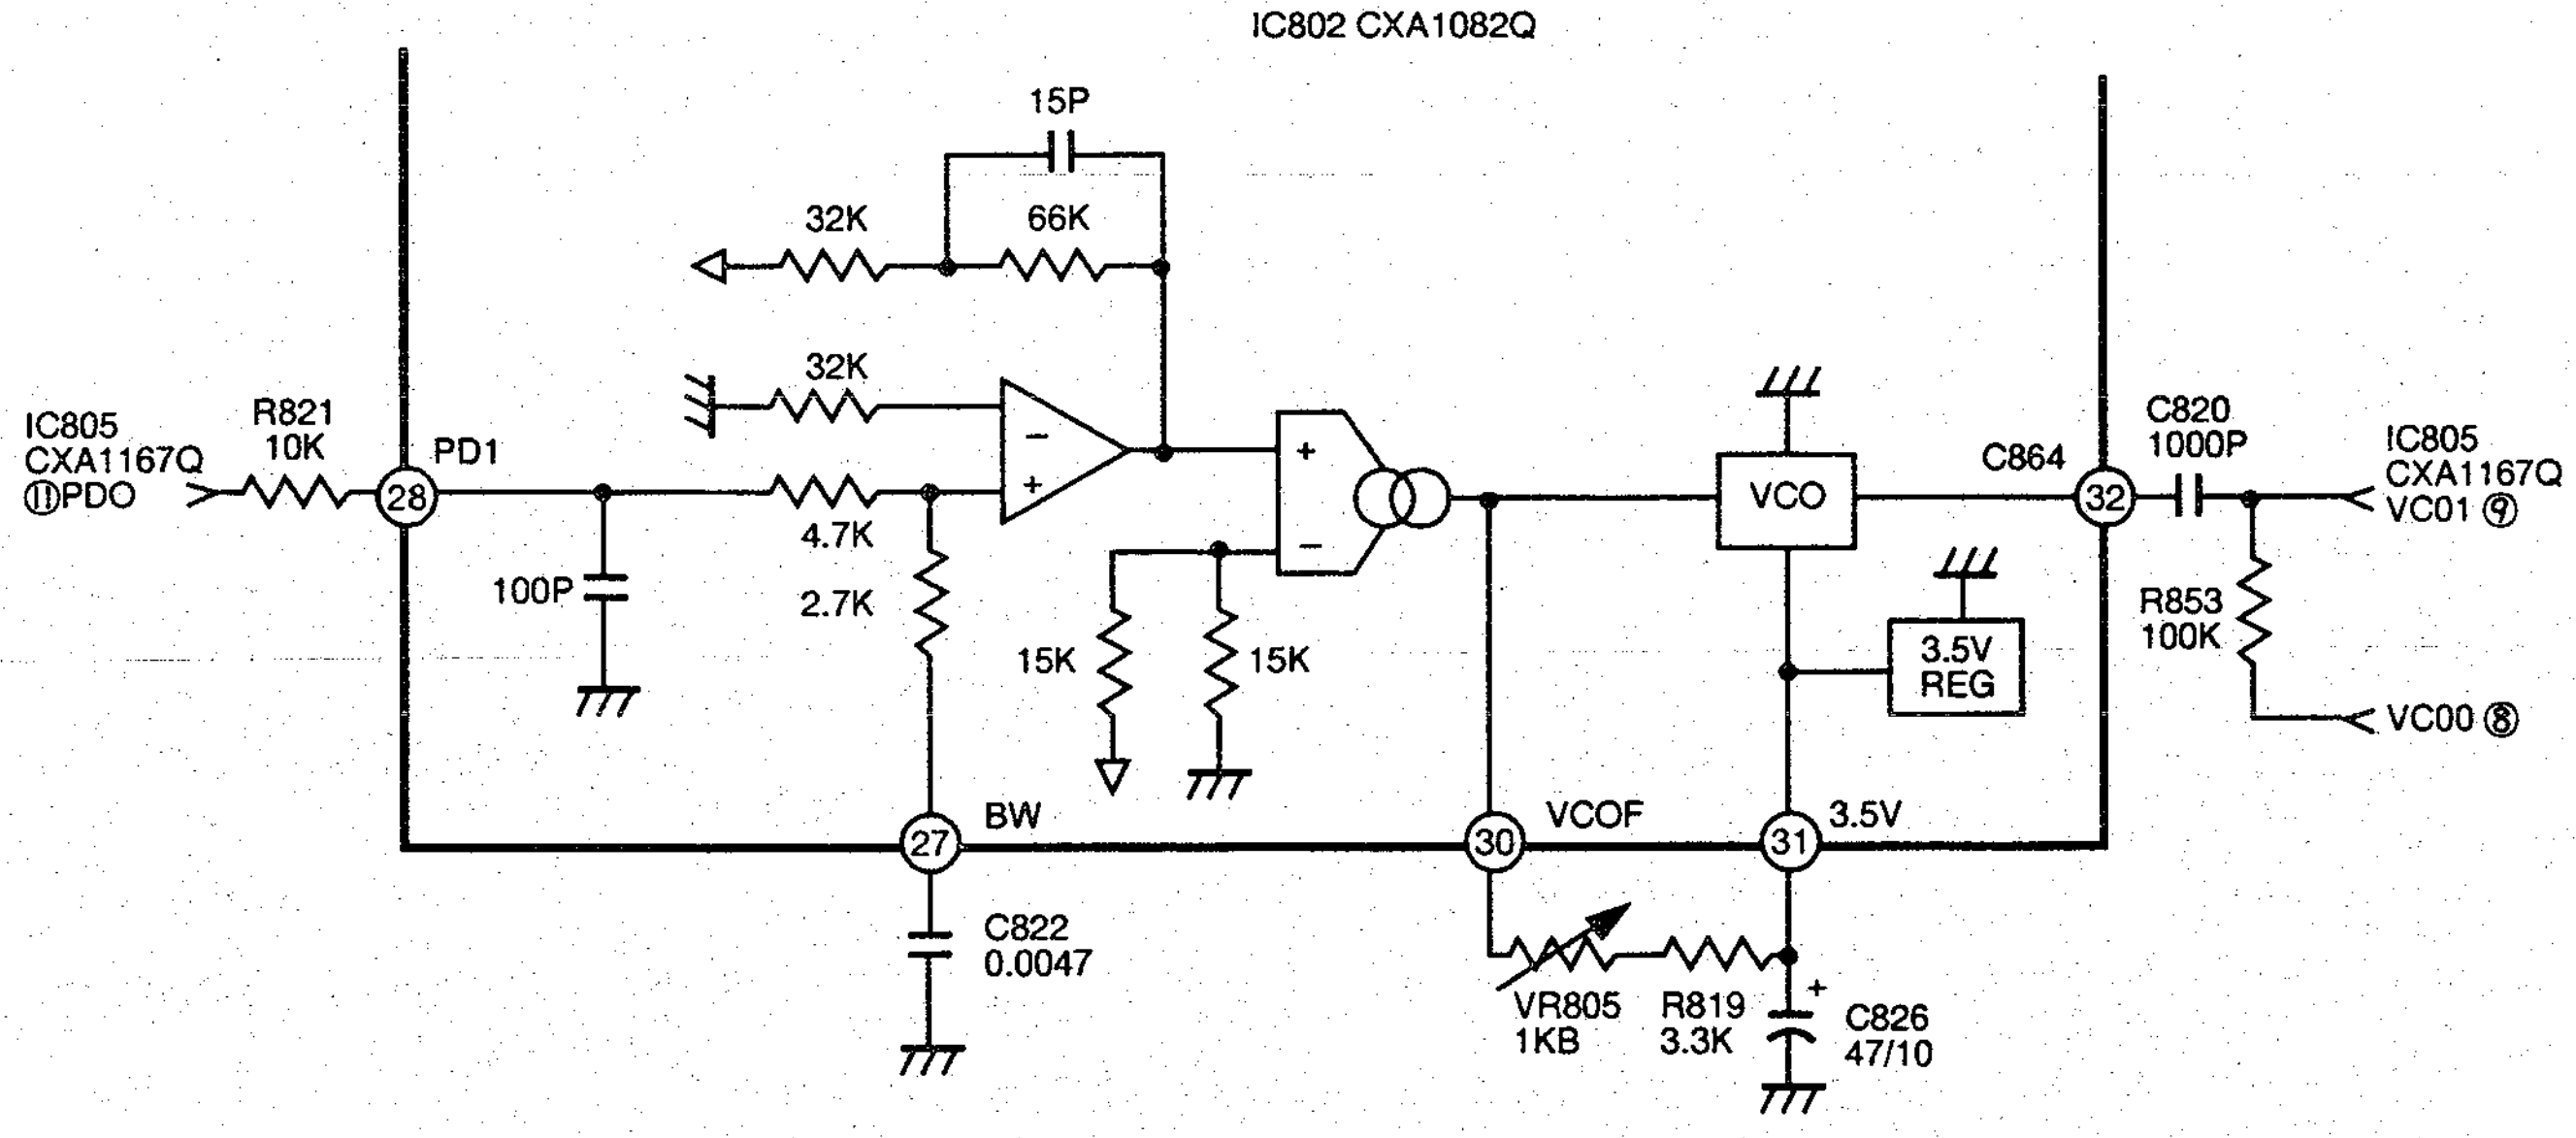
IC802 CXA1082Q
15P
32K
66K
32K
IC805
CXA1167Q
⑪PDO
R821
10K
PD1
28
100P
4.7K
2.7K
15K
15K
VCO
3.5V
REG
C864
32
C820
1000P
IC805
CXA1167Q
VC01 ⑨
R853
100K
VC00 ⑧
BW
27
VCOF
30
31
3.5V
C822
0.0047
VR805
1KB
R819
3.3K
C826
47/10

The phase compensation output PDD input from pin 38 has its PWM carrier component removed in the loop filter. Then, the V-I conversion is made and the free-running frequency setting current from pin 30 is added to control the VCO frequency. The VCO self-running frequency is almost inversely proportional to the resistor across pins 30 and 31. This resistor is set so that the PLL capture range center matches the 4.3218MHz at pin 70 of the CXA1167Q.

WAVEFORMS OF MAJOR CHECK POINTS

1. HF signal (RF signal) waveform (test point TP801) during normal play

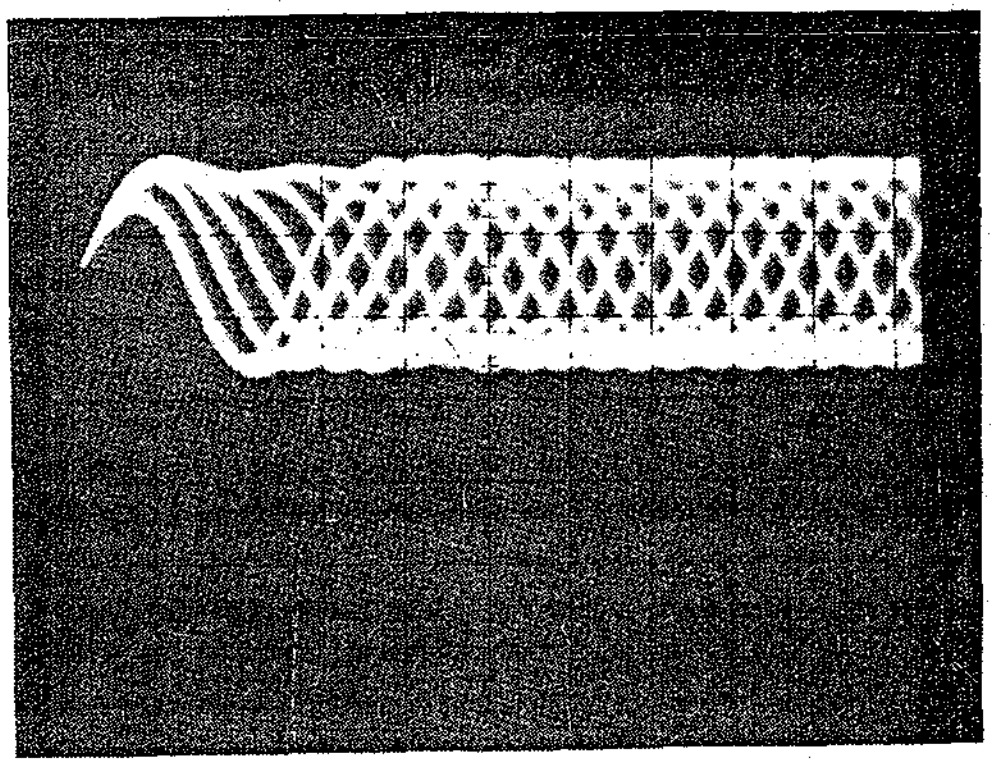

2. EFM signal (pin NO. ㉗ of IC801) waveform during normal play

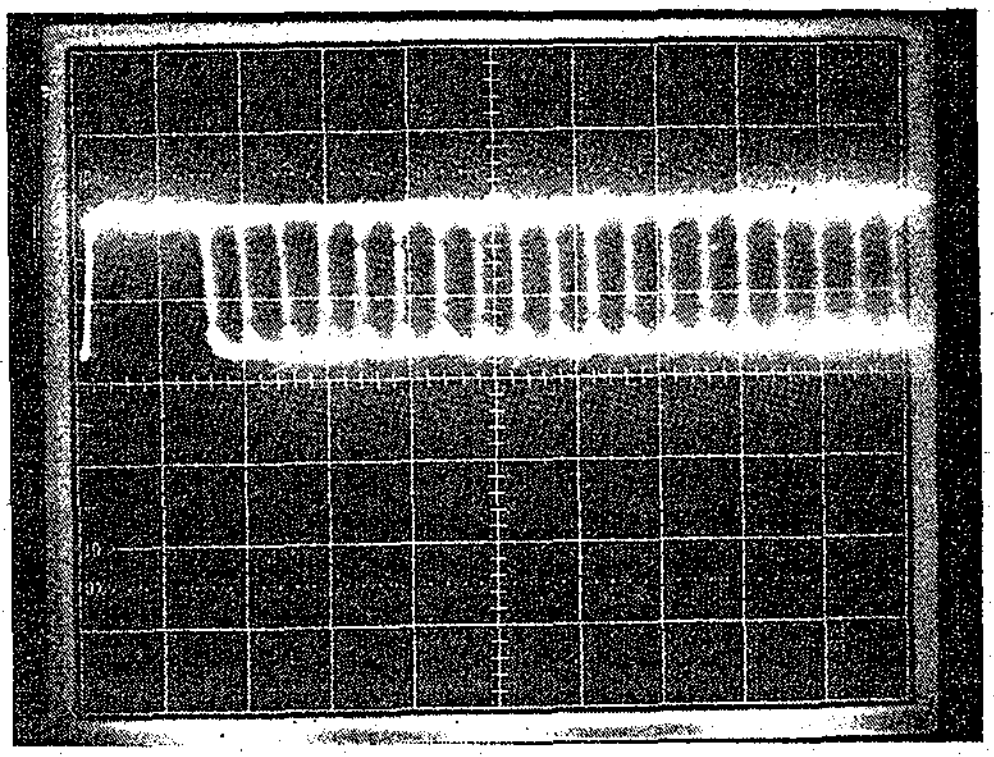

3. Focus coil drive waveform (pin NO. ㉖, ㉗ of IC806)
   - When focus search failed or there is no disc on the tray.

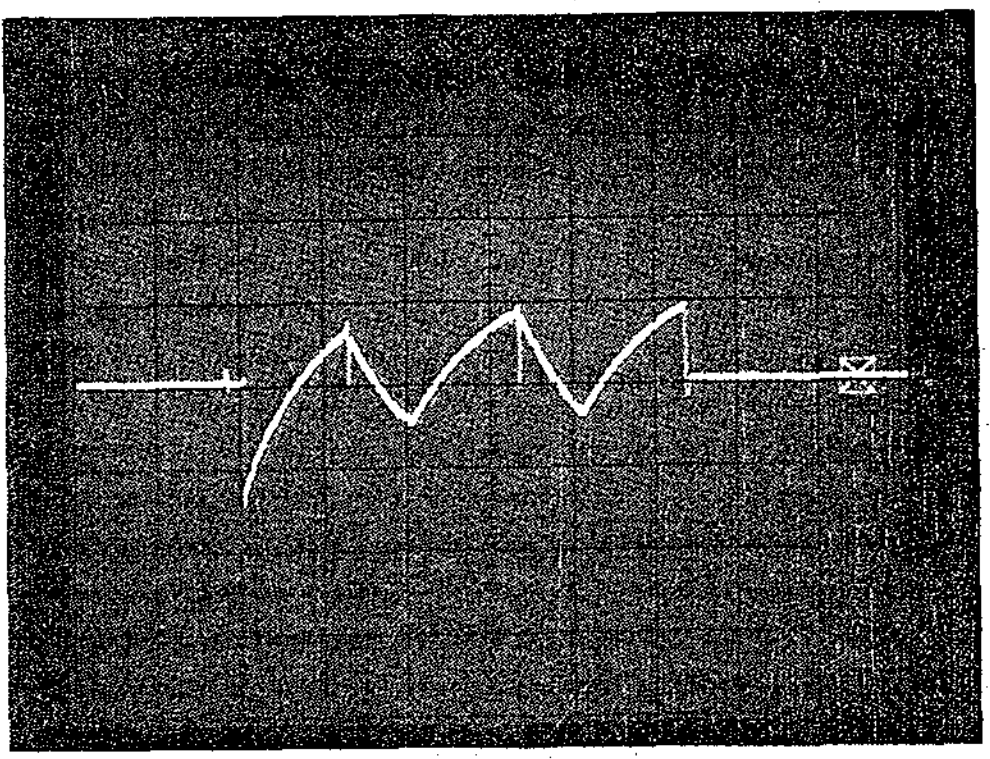

- Focus coil drive waveform (pin NO. ㉖, ㉗ of IC806) and FOK (pin NO. ㉘ of IC801) when focus search is accomplished.

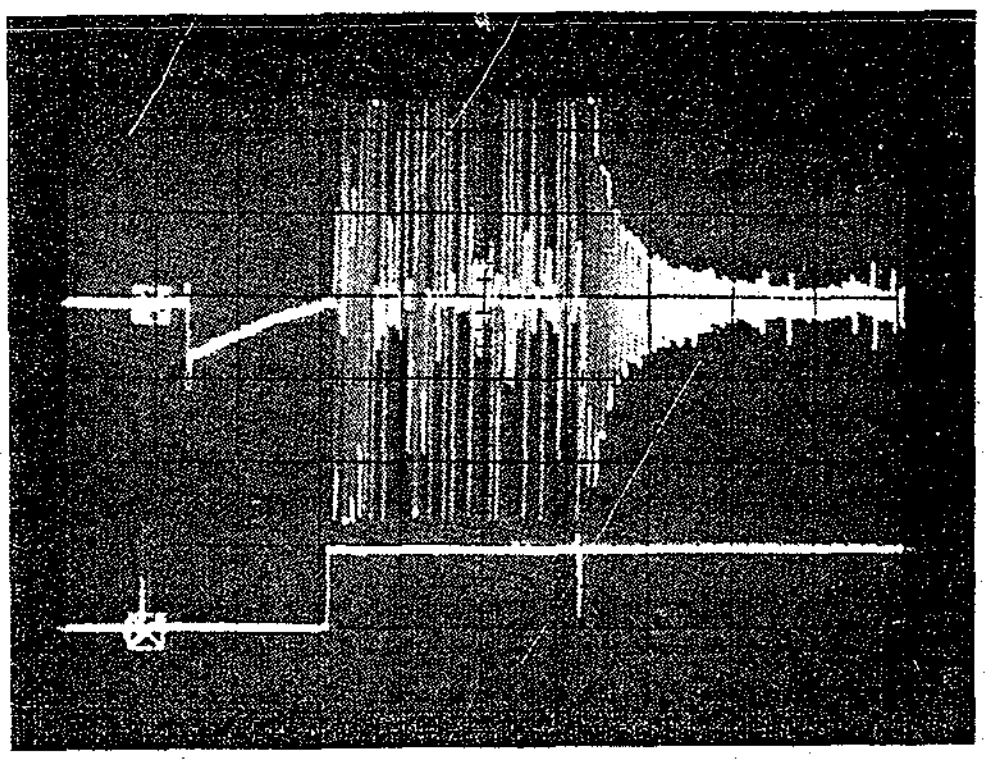

CH1: FOCUS COIL DRIVE SIGNAL
2V/Div.
CH2: FOK

4. Tracking coil drive waveform (pin NO. ③ of IC806) and TEO during track traverse
   (1) When time division is 20mS/div.

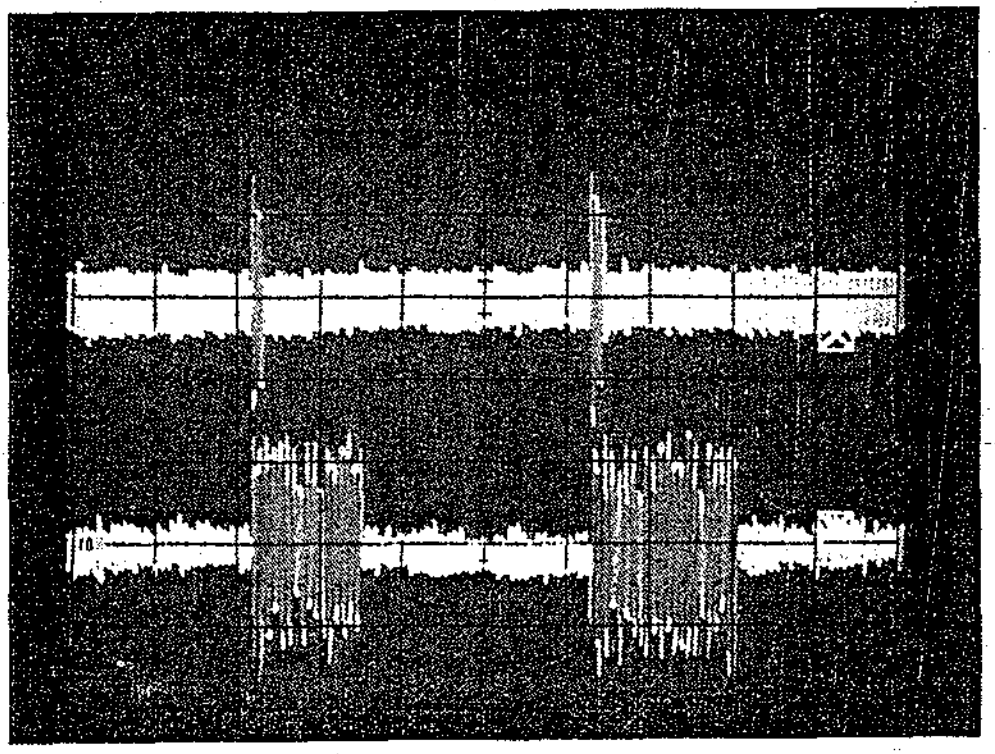

CH1 : TEO
1V/Div.
CH2 : TRACKING COIL DRIVE SIGNAL
2V/Div.

(2) When time division is 0.5mS/div.
(During forward track traverse)

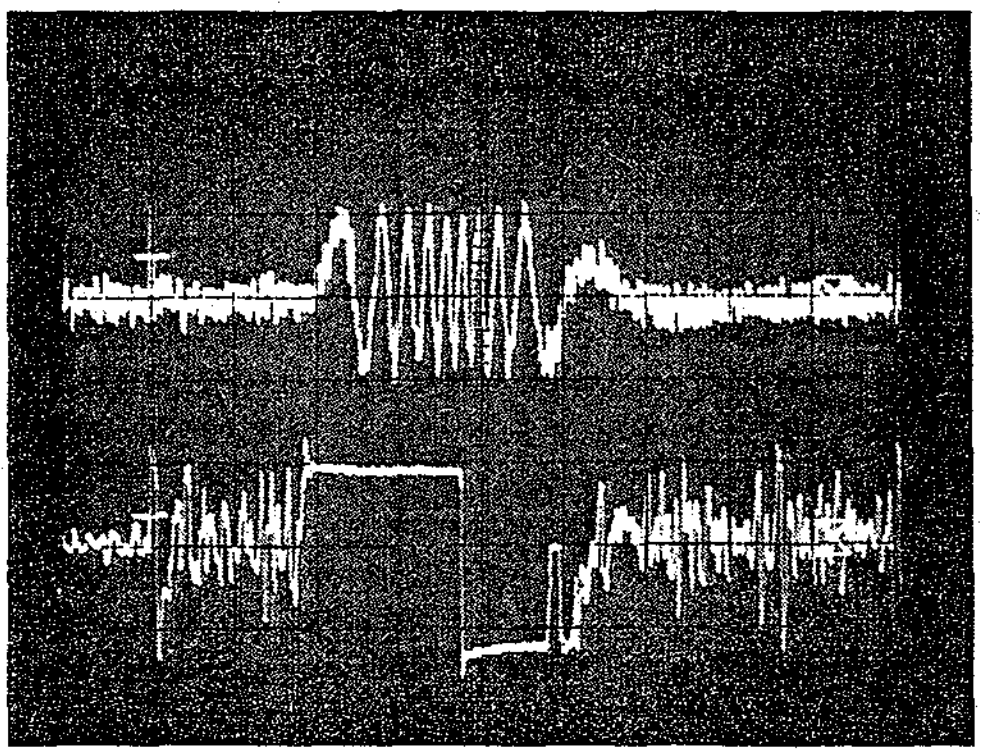

CH1 : TEO
1V/Div.
CH2 : TRACKING COIL DRIVE SIGNAL
2V/Div.

(3) When time division is 0.5mS/div.
(During backward track traverse)

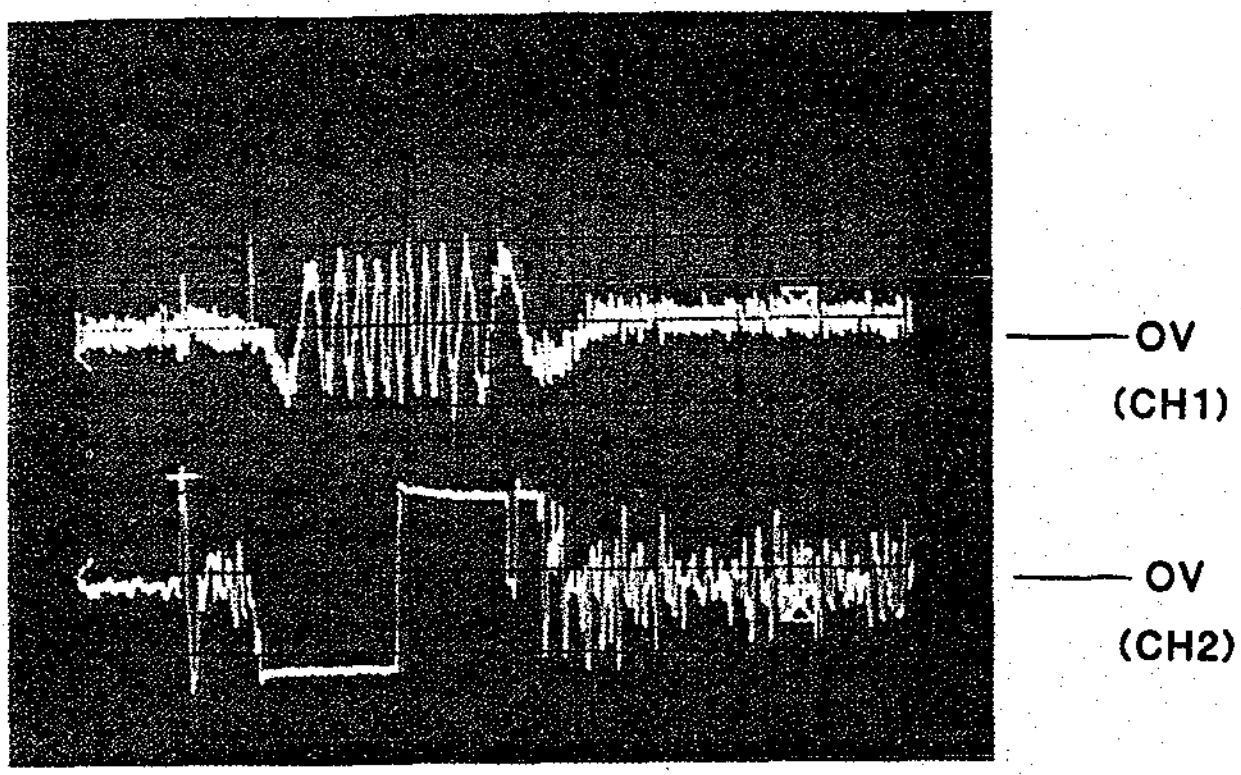

CH1 : TEO
1V/Div.
CH2 : TRACKING COIL DRIVE SIGNAL
2V/Div.

5. Feed motor drive waveform (pin NO. ⑩ of IC806) During normal play.

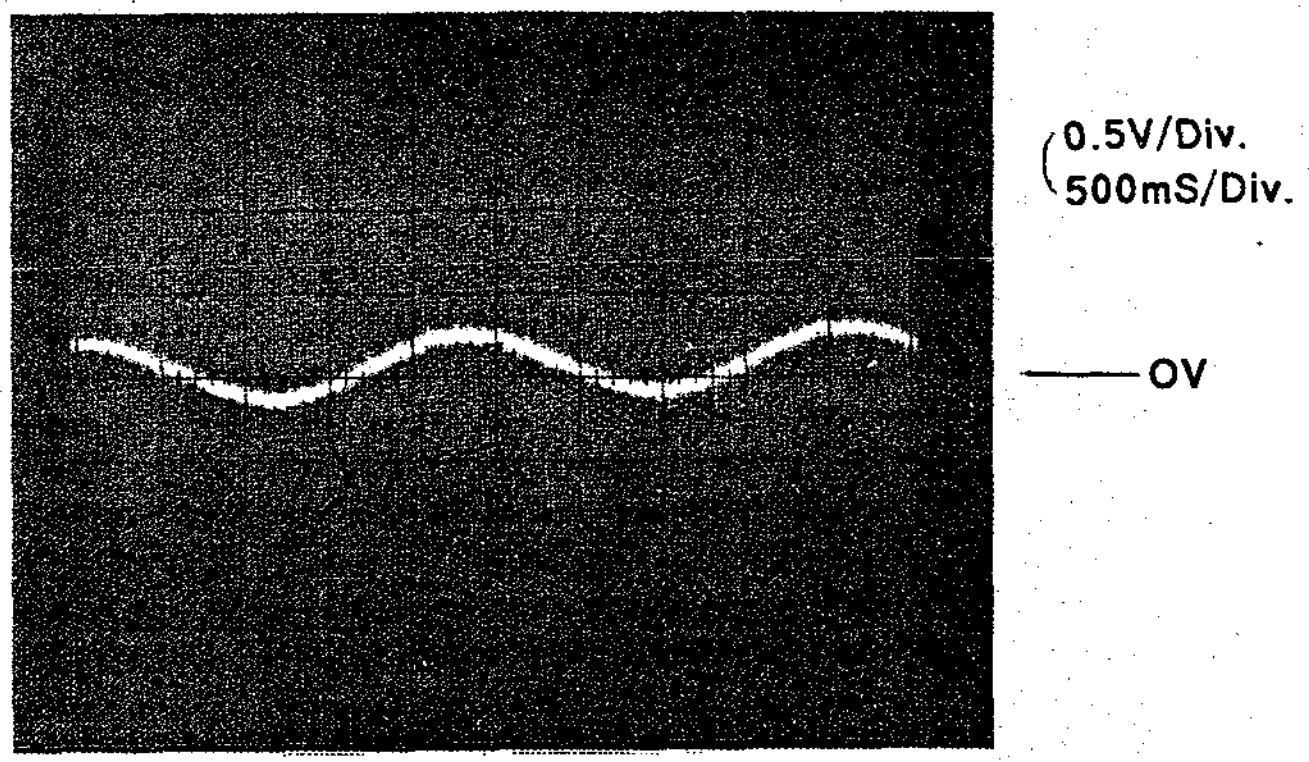

BLOCK DIAGRAM

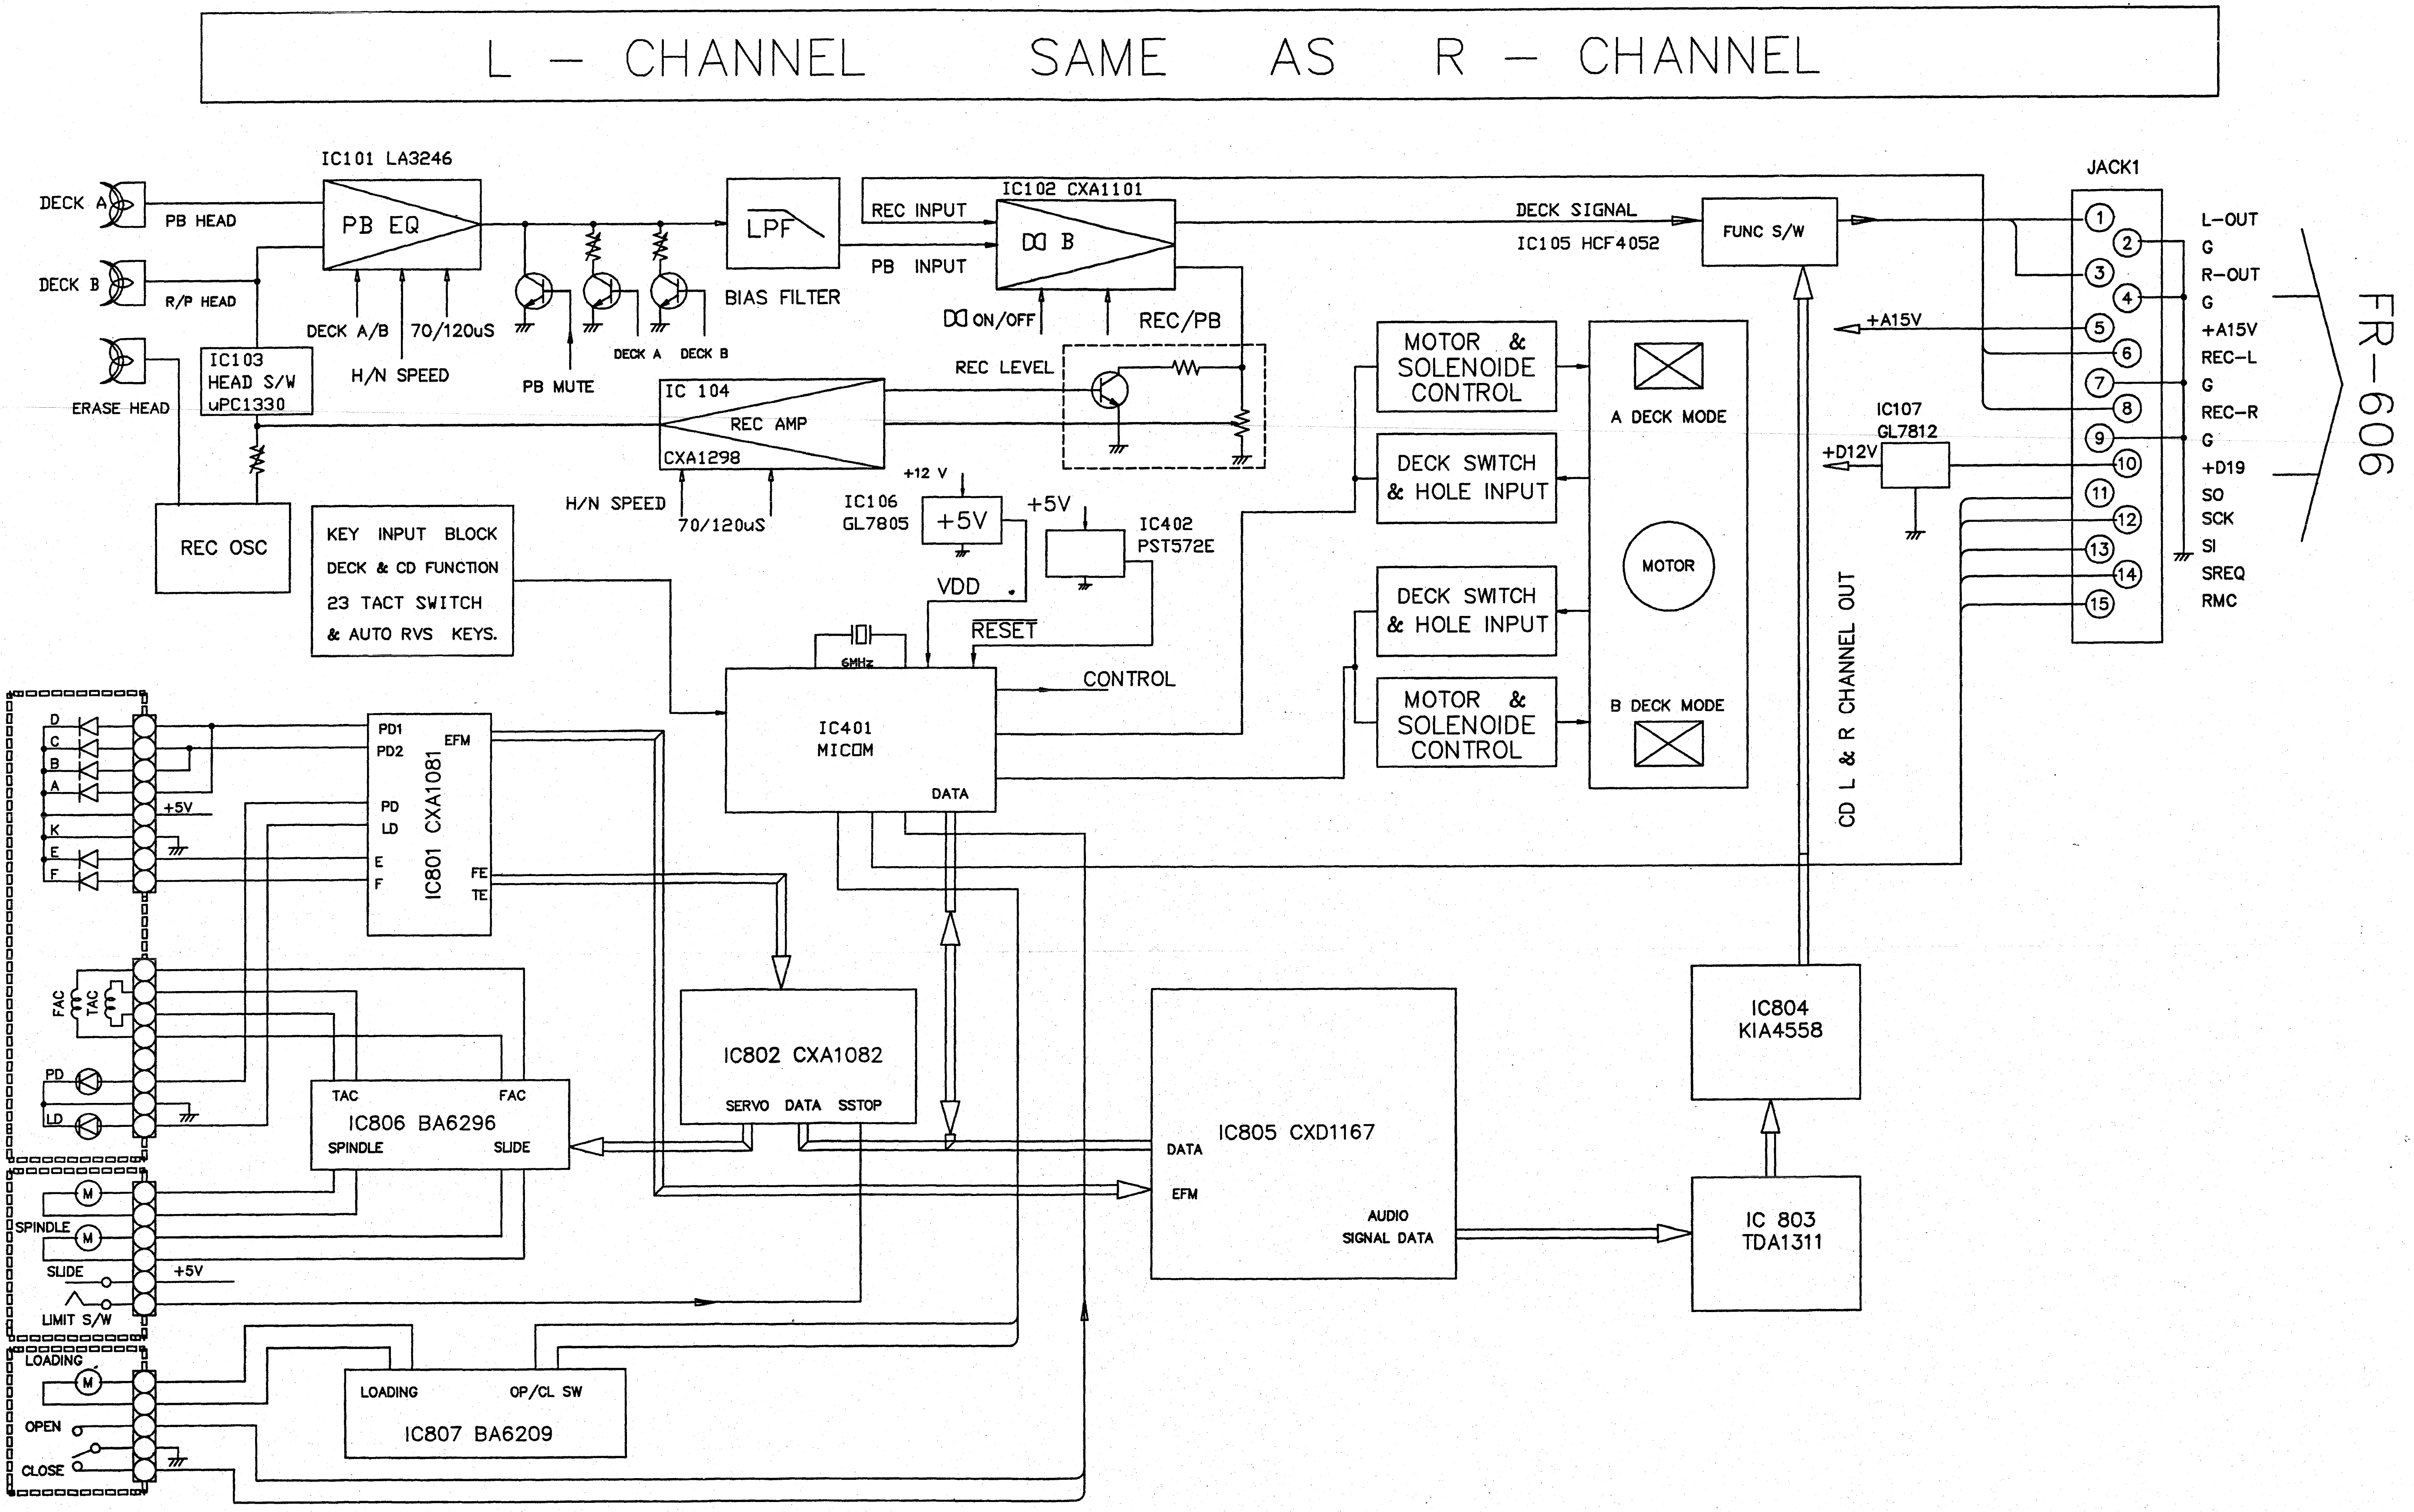
L - CHANNEL SAME AS R - CHANNEL
DECK A
DECK B
PB HEAD
R/P HEAD
ERASE HEAD
IC101 LA3246
PB EQ
DECK A/B
70/120uS
H/N SPEED
IC103
HEAD S/W
uPC1330
REC OSC
PB MUTE
DECK A
DECK B
LPF
BIAS FILTER
IC102 CXA1101
REC INPUT
PB INPUT
ᗡᗞ B
ᗡᗞ ON/OFF
REC/PB
REC LEVEL
IC 104
REC AMP
CXA1298
H/N SPEED
70/120uS
+12 V
IC106
GL7805
+5V
+5V
IC402
PST572E
VDD
RESET
CONTROL
6MHz
IC401
MICOM
DATA
KEY INPUT BLOCK
DECK & CD FUNCTION
23 TACT SWITCH
& AUTO RVS KEYS.
DECK SIGNAL
IC105 HCF4052
FUNC S/W
+A15V
MOTOR & SOLENOIDE CONTROL
DECK SWITCH & HOLE INPUT
DECK SWITCH & HOLE INPUT
MOTOR & SOLENOIDE CONTROL
A DECK MODE
MOTOR
B DECK MODE
IC107
GL7812
+D12V
CD L & R CHANNEL OUT
JACK1
L-OUT
G
R-OUT
G
+A15V
REC-L
G
REC-R
G
+D19
SO
SCK
SI
SREQ
RMC
FR-606
D
C
B
A
K
E
F
+5V
PD1
PD2
EFM
PD
LD
E
F
IC801 CXA1081
FE
TE
FAC
TAC
PD
LD
TAC
FAC
IC806 BA6296
SPINDLE
SLIDE
IC802 CXA1082
SERVO
DATA
SSTOP
IC805 CXD1167
DATA
EFM
AUDIO
SIGNAL DATA
IC804
KIA4558
IC 803
TDA1311
SPINDLE
SLIDE
+5V
LIMIT S/W
LOADING
OPEN
CLOSE
LOADING
OP/CL SW
IC807 BA6209

● DECK CIRCUIT

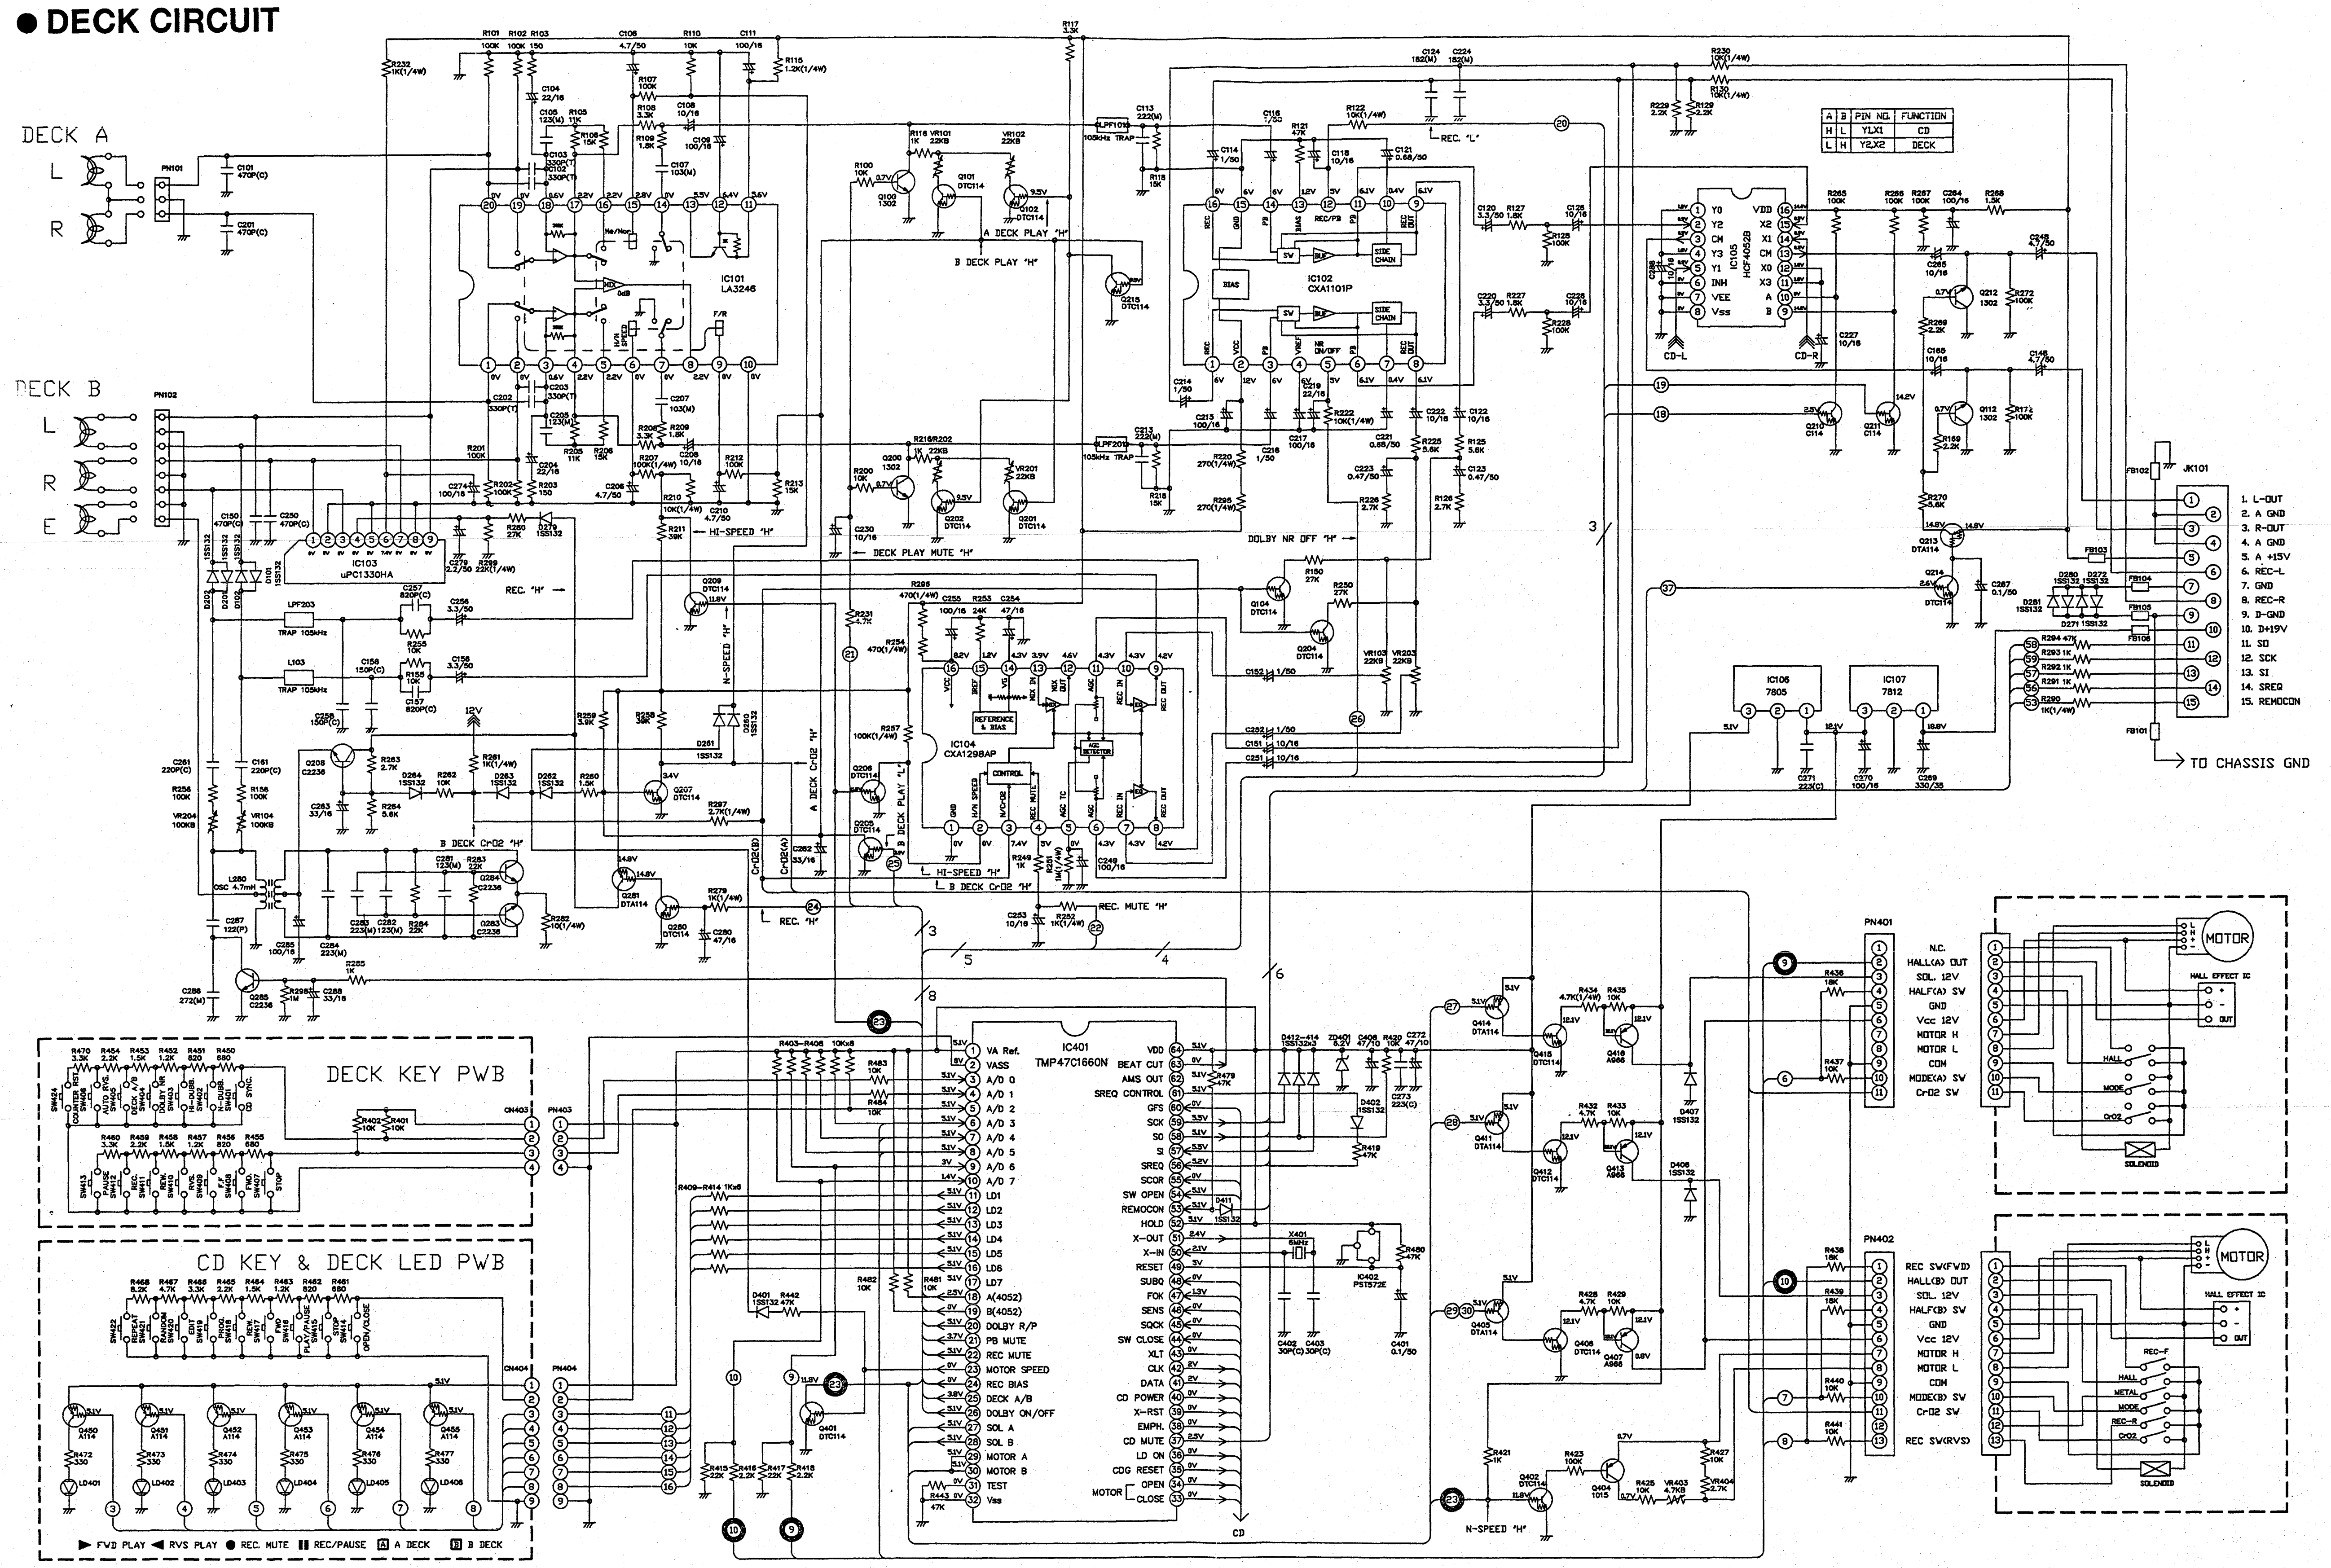
DECK A
L
R
PH101
DECK B
L
R
E
PH102
IC101 LA3246
IC102 CXA1101P
IC103 uPC1330HA
IC104 CXA1298AP
IC105 HCF4052B
IC106 7805
IC107 7812
IC401 TMP47C1660N
A DECK PLAY "H"
B DECK PLAY "H"
HI-SPEED "H"
REC. "H"
DOLBY NR OFF "H"
DECK PLAY MUTE "H"
B DECK CrO2 "H"
REC. MUTE "H"
N-SPEED "H"
BIAS
REFERENCE & BIAS
CONTROL
LPF203
TRAP 105kHz
L103
L280 OSC 4.7mH
X401 8MHz
IC402 PST572E
CD-L
CD-R
A | B | PIN NO. | FUNCTION
H | L | Y1,X1 | CD
L | H | Y2,X2 | DECK
JK101
1. L-OUT
2. A GND
3. R-OUT
4. A GND
5. A +15V
6. REC-L
7. GND
8. REC-R
9. D-GND
10. D+19V
11. SO
12. SCK
13. SI
14. SREQ
15. REMOCON
TO CHASSIS GND
VA Ref.
VASS
A/D 0
A/D 1
A/D 2
A/D 3
A/D 4
A/D 5
A/D 6
A/D 7
LD1
LD2
LD3
LD4
LD5
LD6
LD7
A(4052)
B(4052)
DOLBY R/P
PB MUTE
REC MUTE
MOTOR SPEED
REC BIAS
DECK A/B
DOLBY ON/OFF
SOL A
SOL B
MOTOR A
MOTOR B
TEST
Vss
VDD
BEAT CUT
AMS OUT
SREQ CONTROL
GFS
SCK
SO
SI
SREQ
SCOR
SW OPEN
REMOCON
HOLD
X-OUT
X-IN
RESET
SUBQ
FOK
SENS
SQCK
SW CLOSE
XLT
CLK
DATA
CD POWER
X-RST
EMPH.
CD MUTE
LD ON
CDG RESET
MOTOR
OPEN
CLOSE
CD
PN401
N.C.
HALL(A) OUT
SOL. 12V
HALF(A) SW
GND
Vcc 12V
MOTOR H
MOTOR L
COM
MODE(A) SW
CrO2 SW
PN402
REC SW(FWD)
HALL(B) OUT
SOL. 12V
HALF(B) SW
GND
Vcc 12V
MOTOR H
MOTOR L
COM
MODE(B) SW
CrO2 SW
REC SW(RVS)
MOTOR
HALL EFFECT IC
HALL
MODE
CrO2
REC-F
METAL
REC-R
SOLENOID
DECK KEY PWB
CN403
PN403
CD KEY & DECK LED PWB
CN404
PN404
▶ FWD PLAY ◀ RVS PLAY ● REC. MUTE ❚❚ REC/PAUSE Ⓐ A DECK Ⓑ B DECK

＊ CONTION OF VOLTAGE CHECK
1. DECK FUNCTION
2. DOLBY OFF

NOTES :
1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise (P=MICRO-MICRO FARADS).
3. Schematic diagram for this model are subject to change for improvement without prior notice.

● CD CIRCUIT

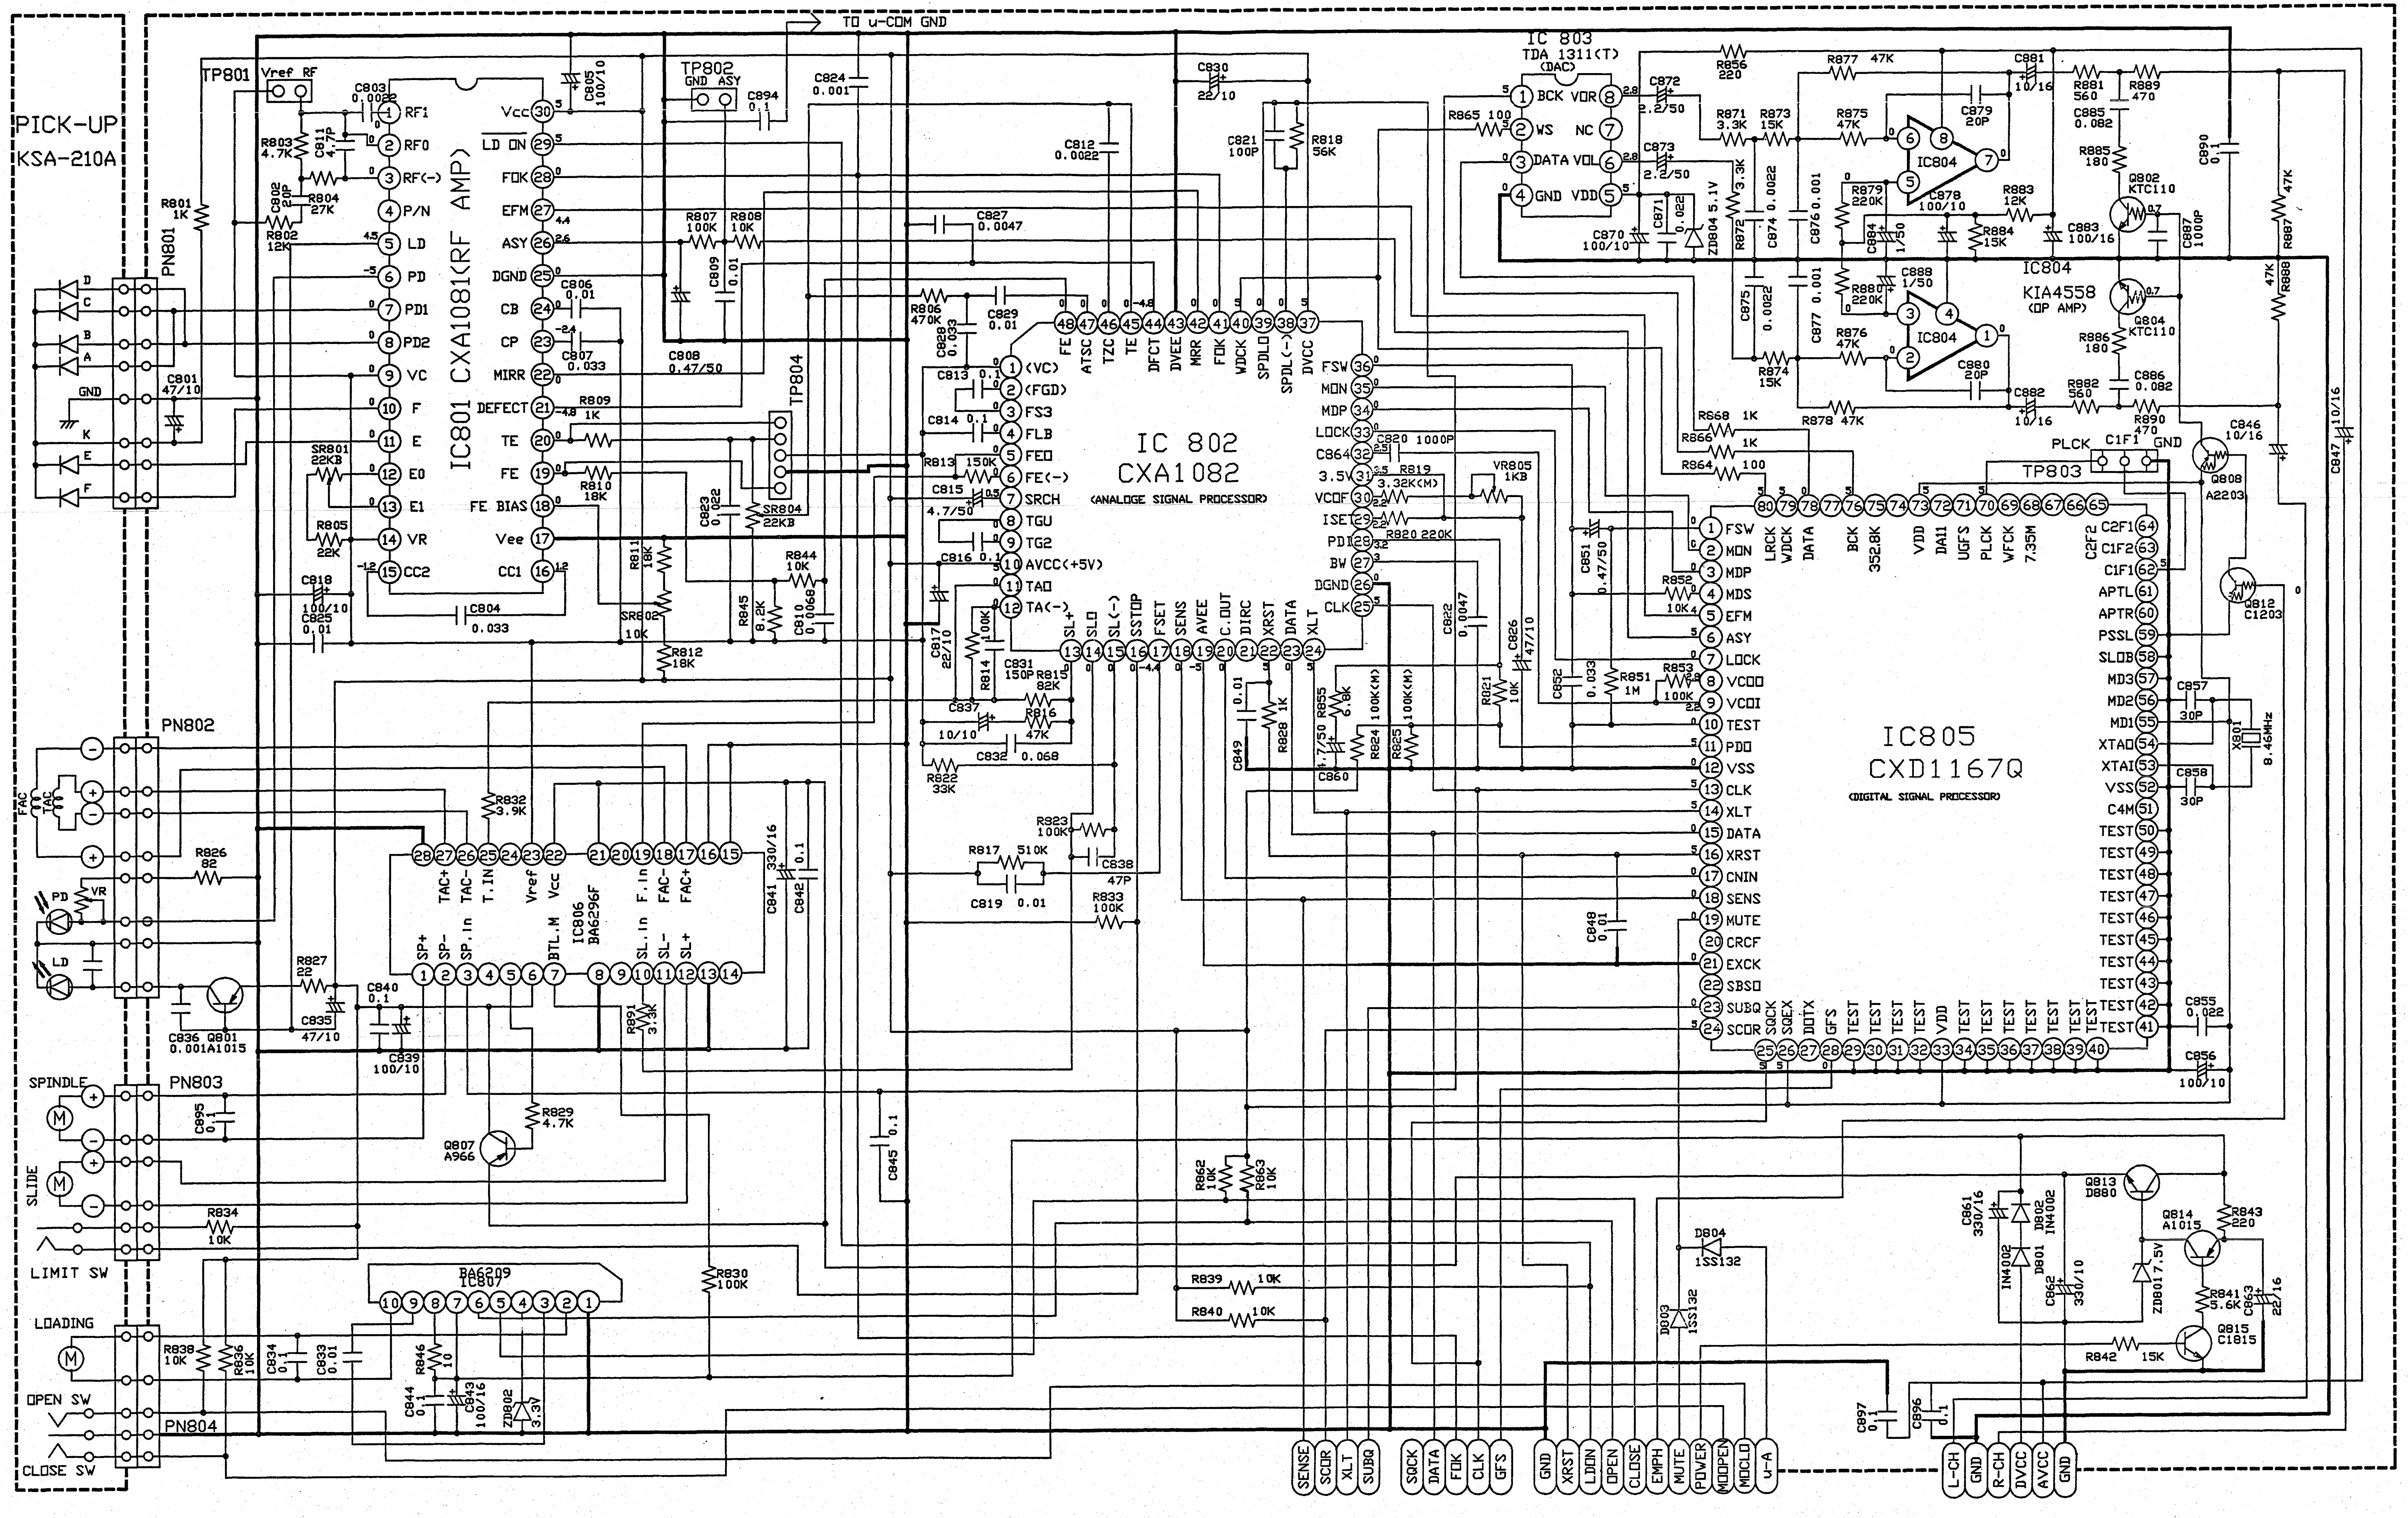
TO u-COM GND
PICK-UP
KSA-210A
TP801
Vref RF
PN801
PN802
PN803
PN804
FAC
TAC
PD
VR
LD
SPINDLE
SLIDE
LIMIT SW
LOADING
OPEN SW
CLOSE SW
GND
IC801 CXA1081(RF AMP)
RF1
RFO
RF(-)
P/N
LD
PD
PD1
PD2
VC
F
E
EO
E1
VR
CC2
Vcc
LD ON
FOK
EFM
ASY
DGND
CB
CP
MIRR
DEFECT
TE
FE
FE BIAS
Vee
CC1
TP802
GND ASY
TP804
IC 802
CXA1082
(ANALOGE SIGNAL PROCESSOR)
FE
ATSC
TZC
TE
DFCT
DVEE
MRR
FOK
WDCK
SPDLO
SPDL(-)
DVCC
FSW
MON
MDP
LOCK
C864
3.5V
VCOF
ISET
PDI
BW
DGND
CLK
(VC)
(FGD)
FS3
FLB
FEO
FE(-)
SRCH
TGU
TG2
AVCC(+5V)
TAO
TA(-)
SL+
SLO
SL(-)
SSTOP
FSET
SENS
AVEE
C.OUT
DIRC
XRST
DATA
XLT
IC806
BA6296F
TAC+
TAC-
T.IN
Vref
Vcc
F.in
FAC-
FAC+
SP+
SP-
SP.in
BTL.M
SL.in
SL-
SL+
Q801
A1015
Q807
A966
BA6209
IC807
IC 803
TDA 1311(T)
(DAC)
BCK
WS
DATA
GND
VDR
NC
VDL
VDD
IC804
KIA4558
(OP AMP)
Q802
KTC110
Q804
KTC110
TP803
PLCK
C1F1
Q808
A2203
Q812
C1203
X801
8.46MHz
IC805
CXD1167Q
(DIGITAL SIGNAL PROCESSOR)
FSW
MON
MDP
MDS
EFM
ASY
LOCK
VCOO
VCOI
TEST
PDO
VSS
CLK
XLT
DATA
XRST
CNIN
SENS
MUTE
CRCF
EXCK
SBSO
SUBQ
SCOR
C2F1
C2F2
C1F1
APTL
APTR
PSSL
SLOB
MD3
MD2
MD1
XTAO
XTAI
VSS
C4M
LRCK
WDCK
DATA
BCK
352.8K
VDD
DA11
UGFS
PLCK
WFCK
7.35M
SQCK
SQEX
DOTX
GFS
D804
1SS132
D803
1SS132
D801
1N4002
D802
IN4002
ZD801 7.5V
ZD802
3.3V
ZD804 5.1V
Q813
D880
Q814
A1015
Q815
C1815
SENSE
SCOR
XLT
SUBQ
SQCK
DATA
FOK
CLK
GFS
GND
XRST
LDON
OPEN
CLOSE
EMPH
MUTE
POWER
MODPEN
MDCLO
u-A
L-CH
GND
R-CH
DVCC
AVCC
GND
VR805
1KB
SR801
22KB
SR802
SR804
22KB

NOTES : 1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise (P=MICRO-MICRO FARADS).
3. Schematic diagram for this model are subject to change for improvement without prior notice.

PCB LAYOUT

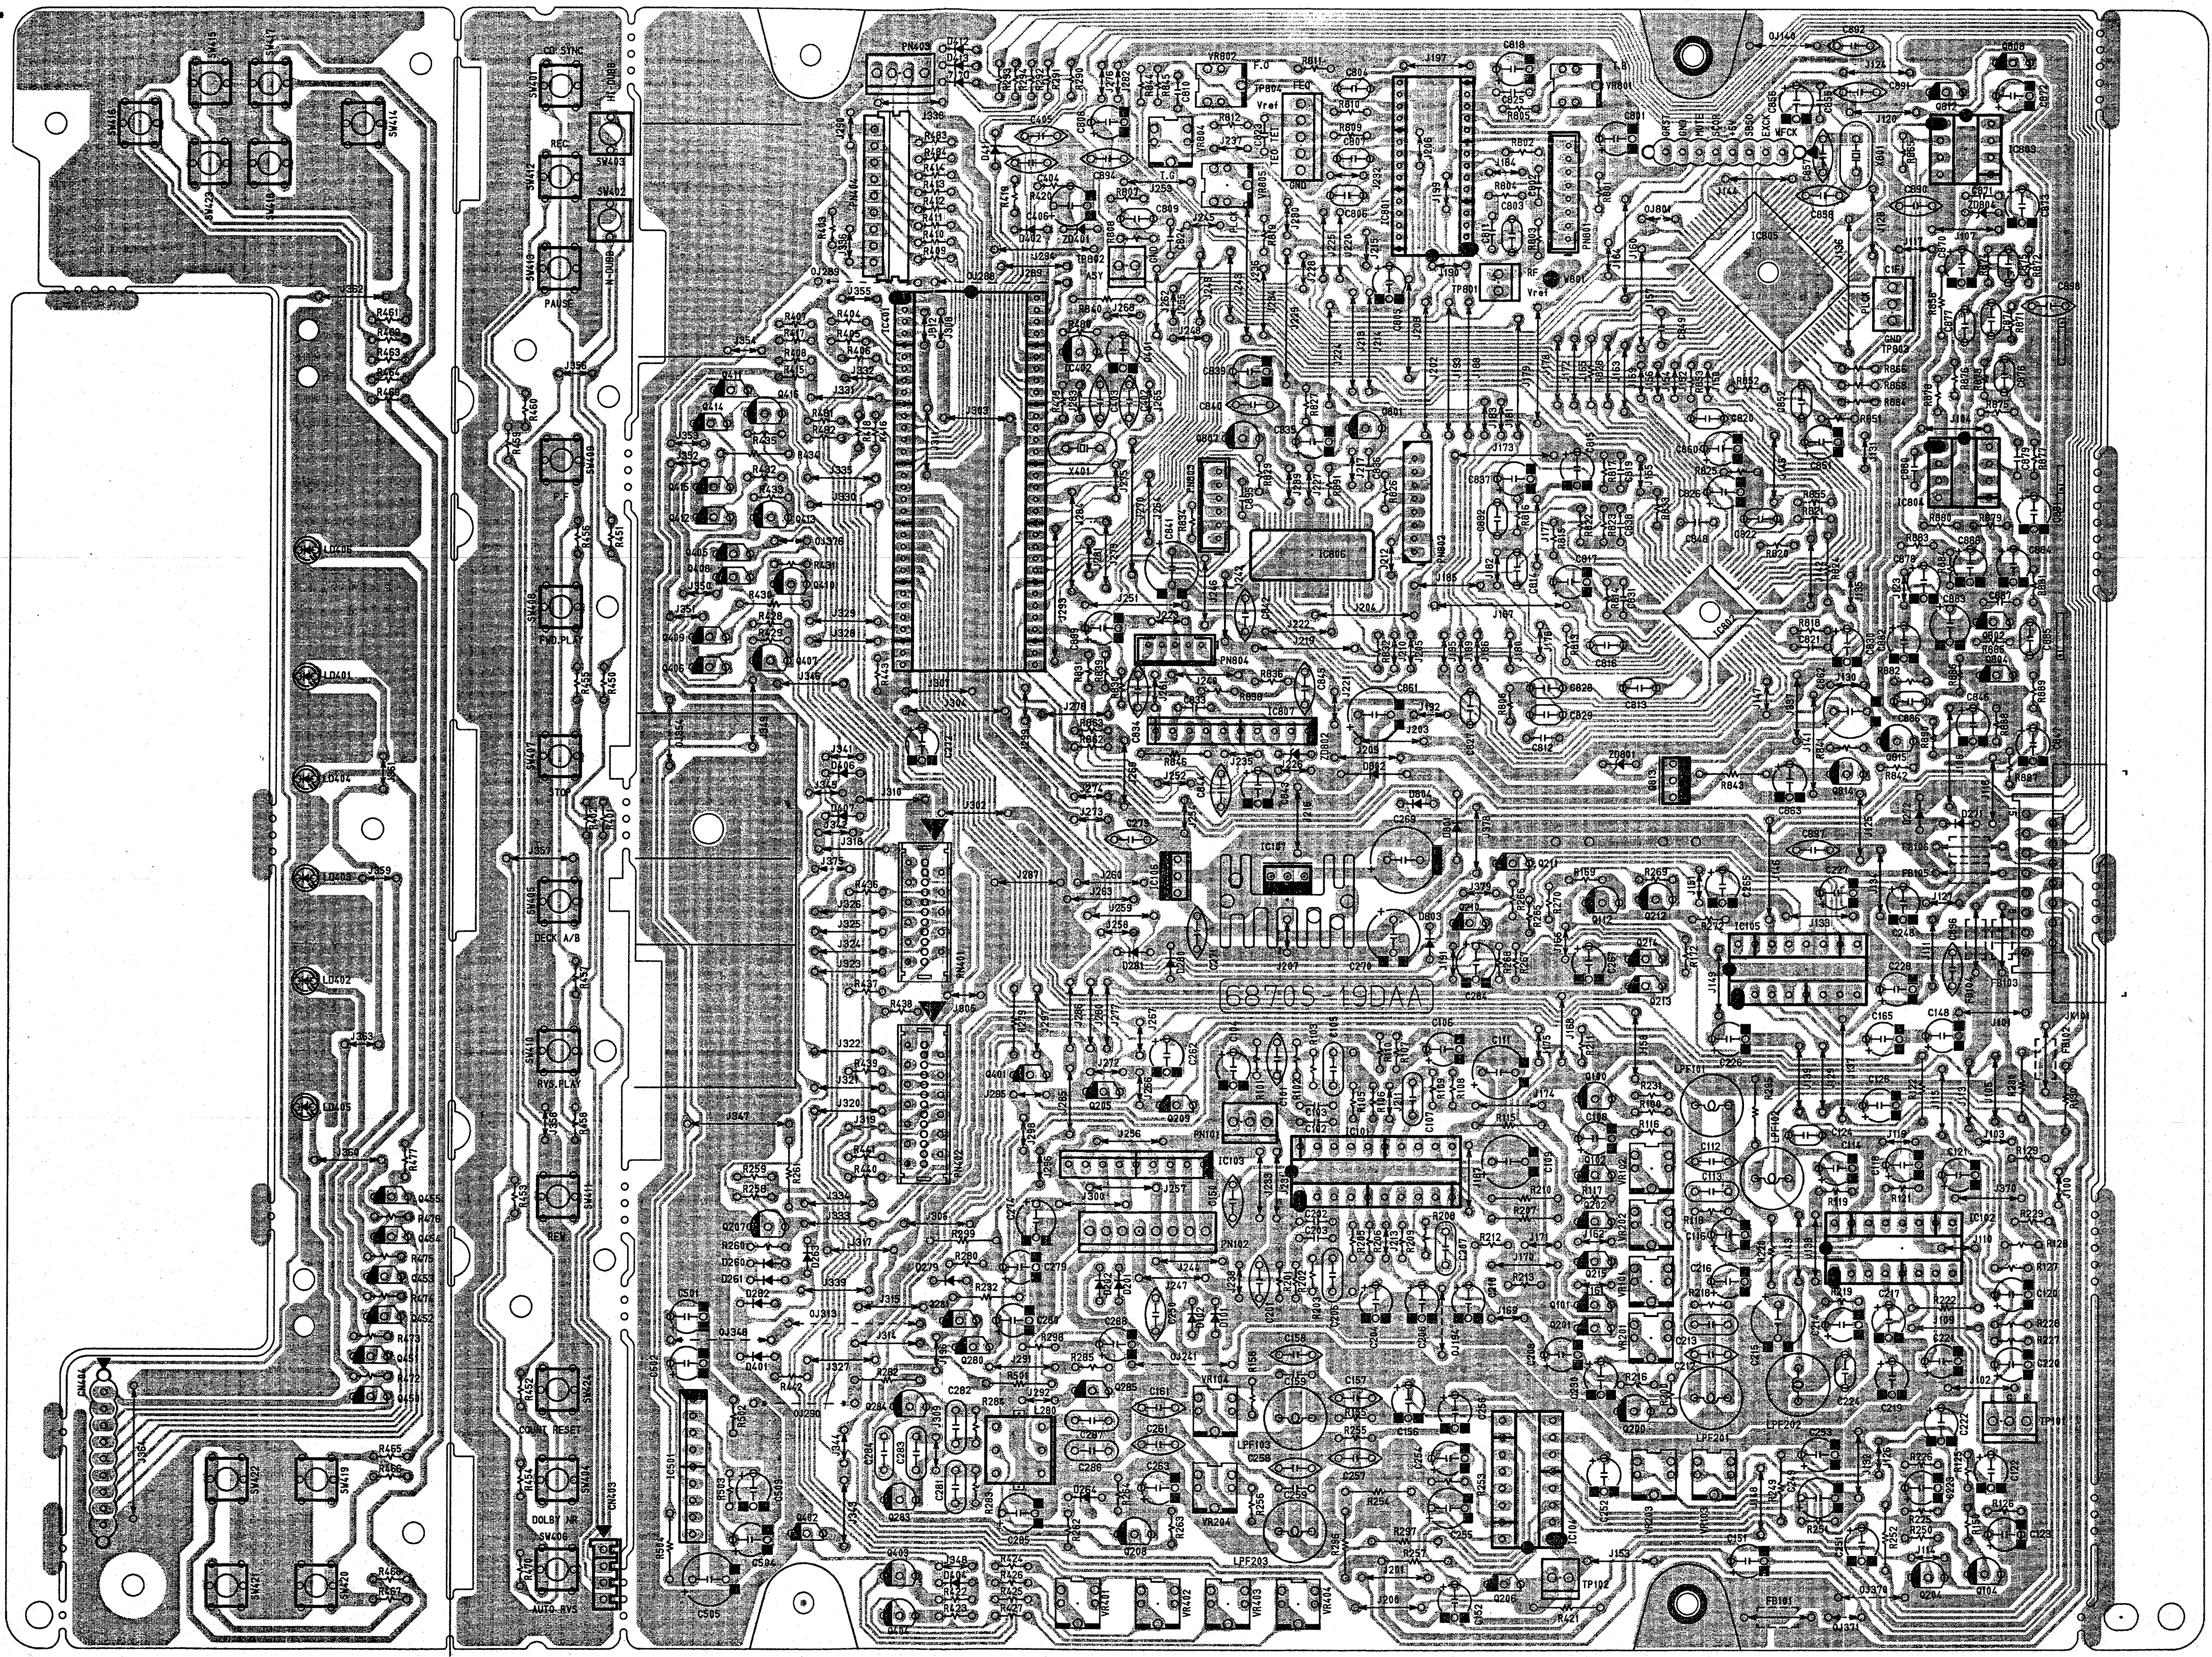
6870S-19DAA

WIRING DIAGRAM

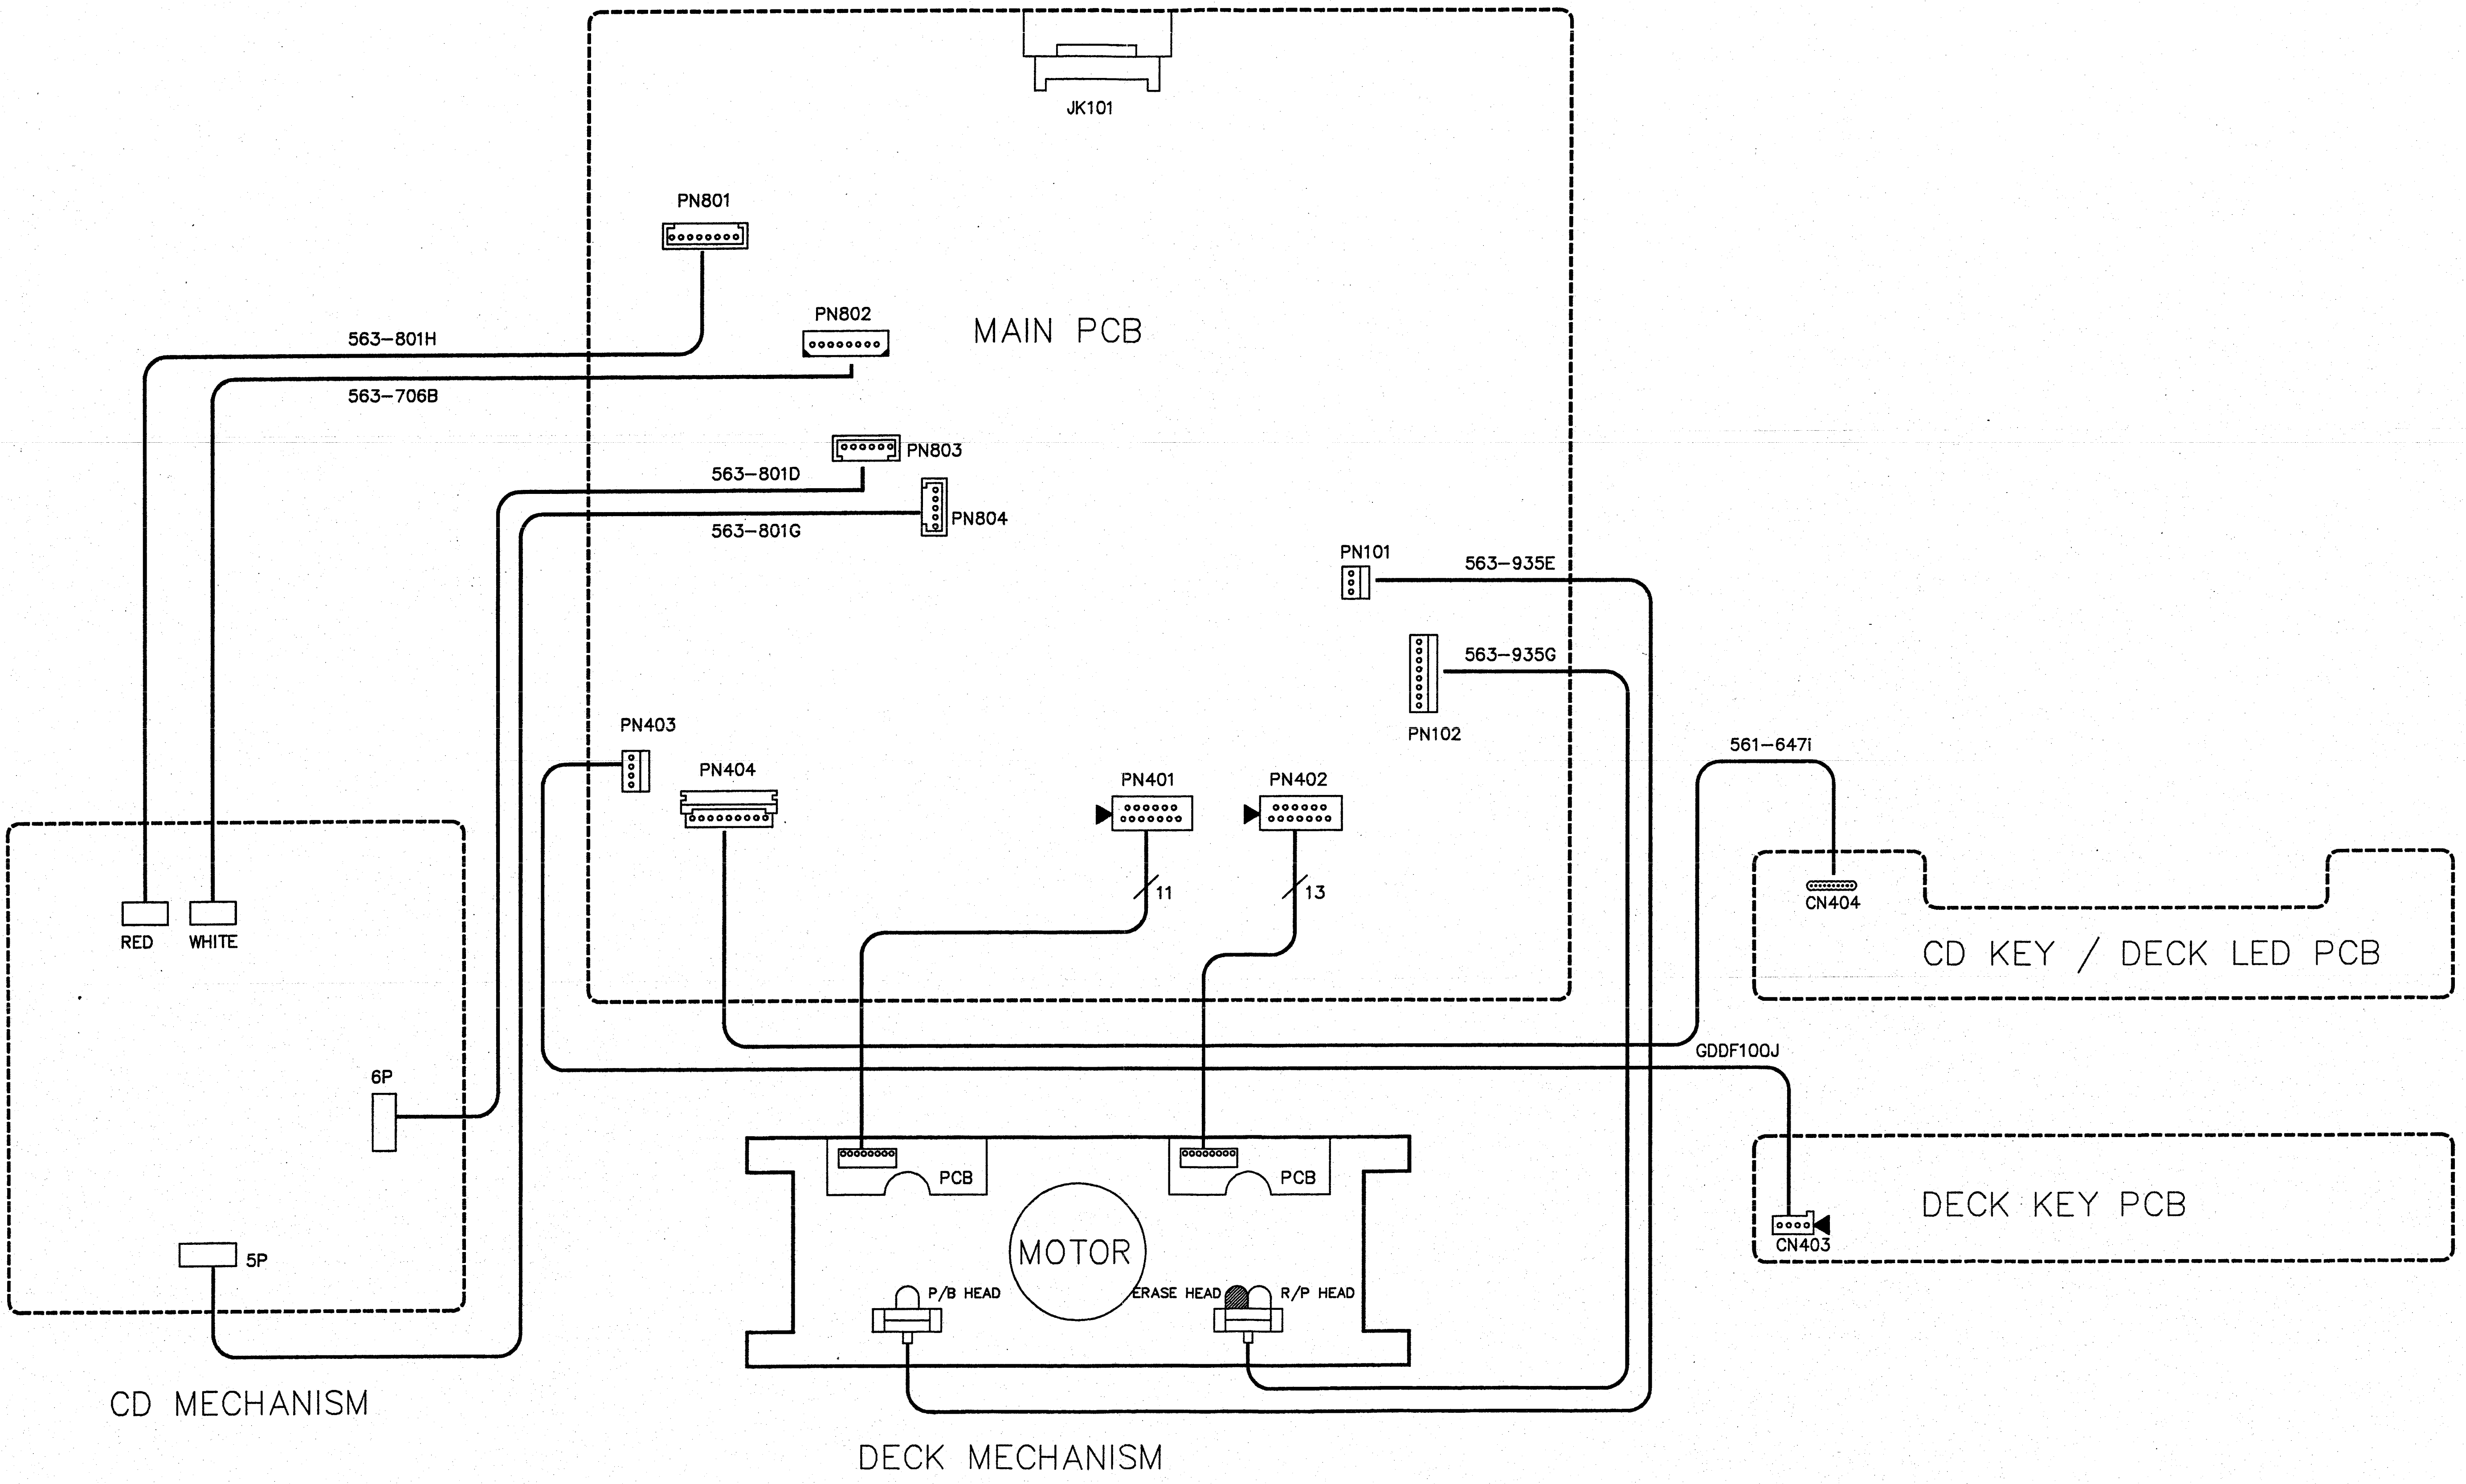
JK101
PN801
PN802
MAIN PCB
563-801H
563-706B
PN803
563-801D
PN804
563-801G
PN101
563-935E
563-935G
PN102
561-647i
PN403
PN404
PN401
PN402
11
13
CN404
CD KEY / DECK LED PCB
RED
WHITE
6P
5P
GDDF100J
PCB
PCB
MOTOR
P/B HEAD
ERASE HEAD
R/P HEAD
CN403
DECK KEY PCB
CD MECHANISM
DECK MECHANISM

INTERNAL BLOCK DIAGRAM OF ICs

BA6209

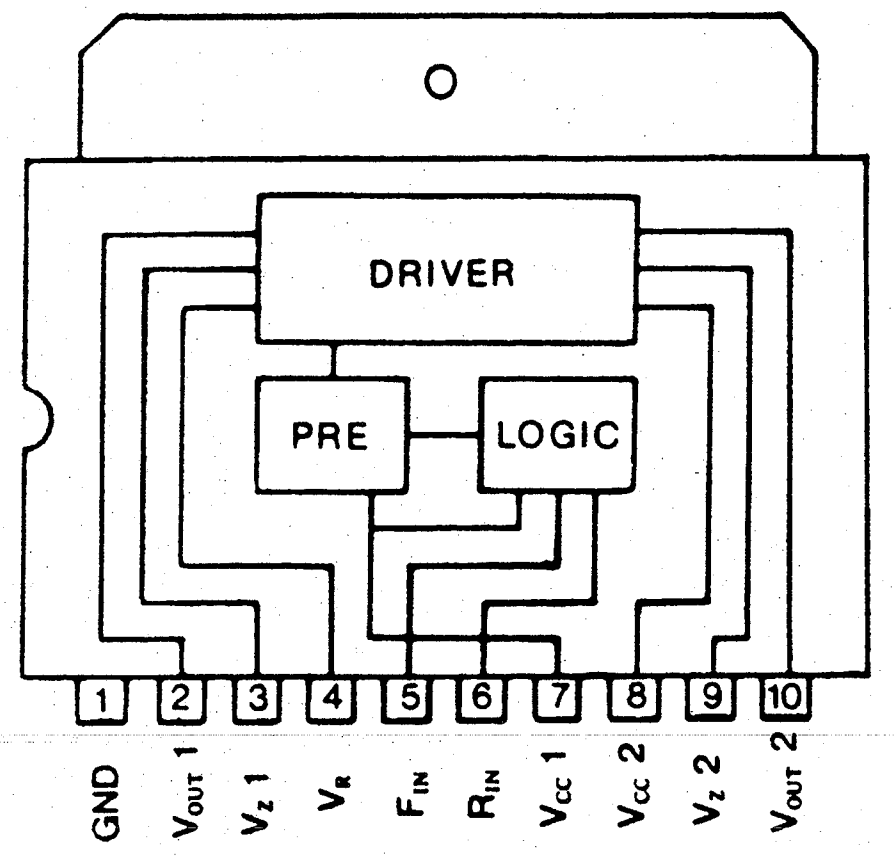
DRIVER
PRE
LOGIC
1 GND
2 V_{OUT} 1
3 V_Z 1
4 V_R
5 F_{IN}
6 R_{IN}
7 V_{CC} 1
8 V_{CC} 2
9 V_Z 2
10 V_{OUT} 2

μ PC1330

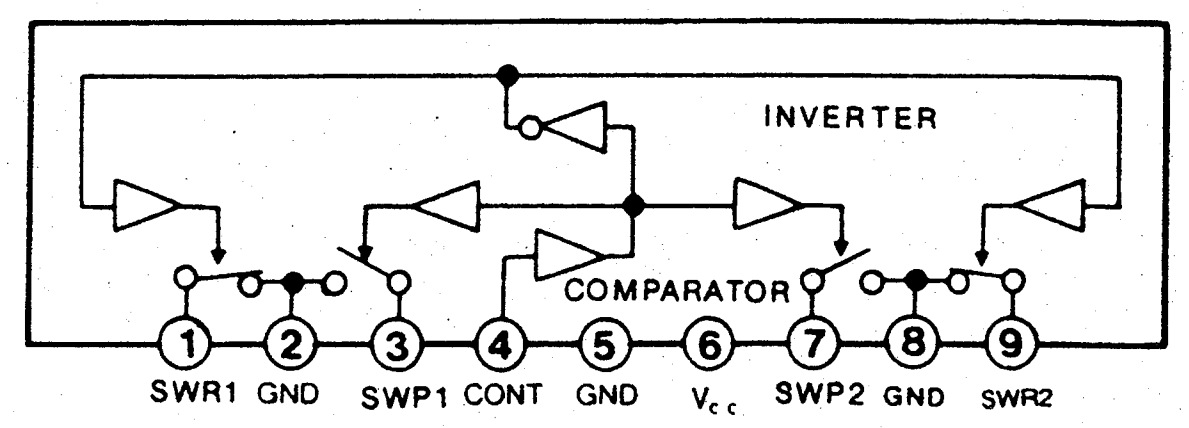
INVERTER
COMPARATOR
1 SWR1
2 GND
3 SWP1
4 CONT
5 GND
6 V_{CC}
7 SWP2
8 GND
9 SWR2

CXA1081S (RF Amp)

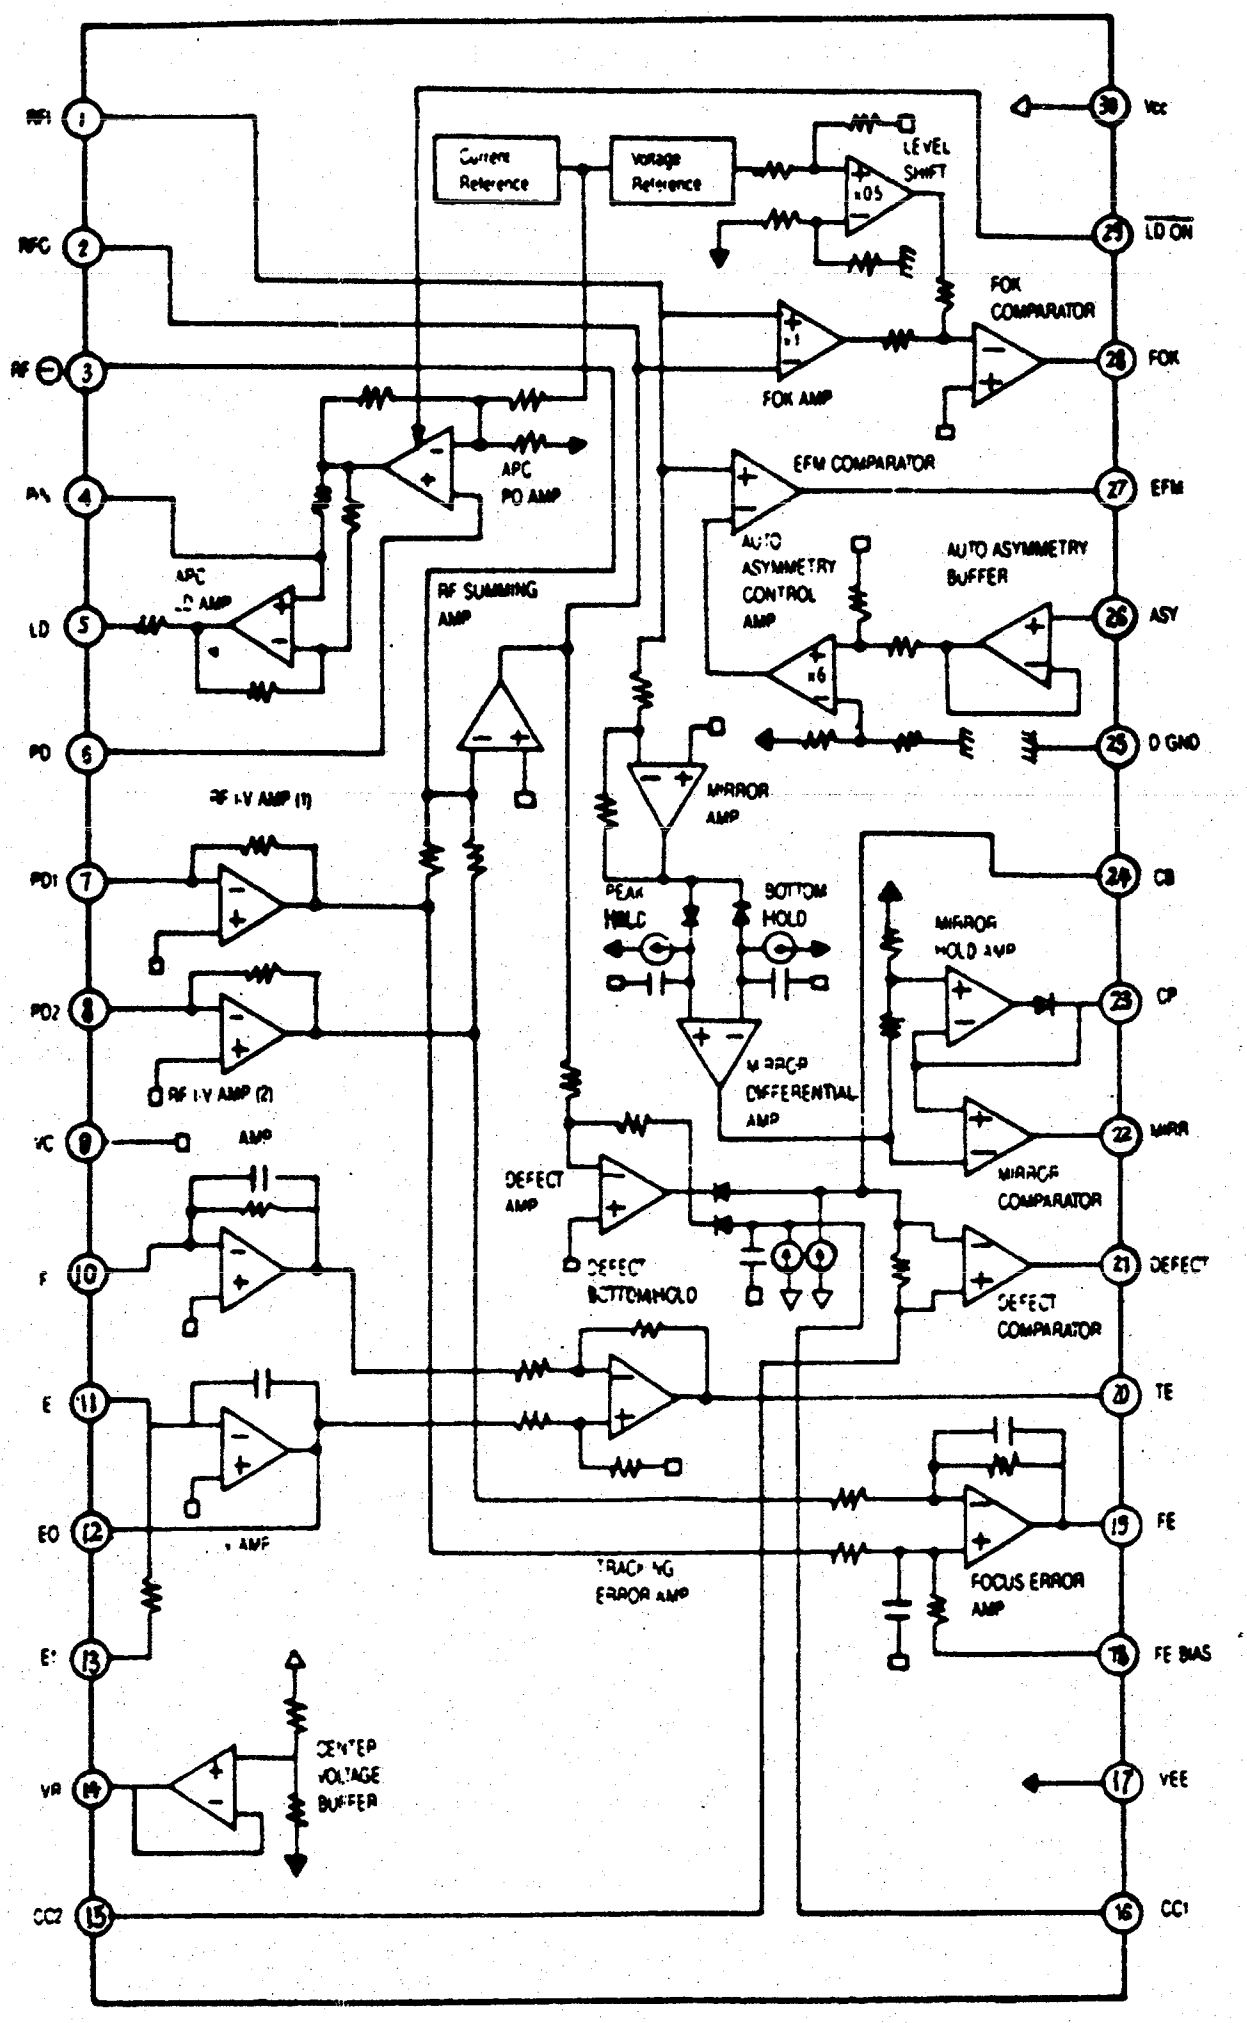
RFI 1
RFC 2
RF ⊖ 3
PN 4
LD 5
PD 6
PD1 7
PD2 8
VC 9
F 10
E 11
EO 12
E' 13
VR 14
CC2 15
CC1 16
VEE 17
FE BIAS 18
FE 19
TE 20
DEFECT 21
MIRR 22
CP 23
CB 24
D GND 25
ASY 26
EFM 27
FOK 28
LD ON 29
Vcc 30
Current Reference
Voltage Reference
LEVEL SHIFT
×0.5
FOK COMPARATOR
FOK AMP
×1
APC PD AMP
APC LD AMP
EFM COMPARATOR
AUTO ASYMMETRY CONTROL AMP
×6
AUTO ASYMMETRY BUFFER
RF SUMMING AMP
MIRROR AMP
RF I-V AMP (1)
RF I-V AMP (2)
PEAK HOLD
BOTTOM HOLD
MIRROR HOLD AMP
MIRROR DIFFERENTIAL AMP
MIRROR COMPARATOR
AMP
DEFECT AMP
DEFECT BOTTOMHOLD
DEFECT COMPARATOR
TRACKING ERROR AMP
FOCUS ERROR AMP
CENTER VOLTAGE BUFFER

CXA1082

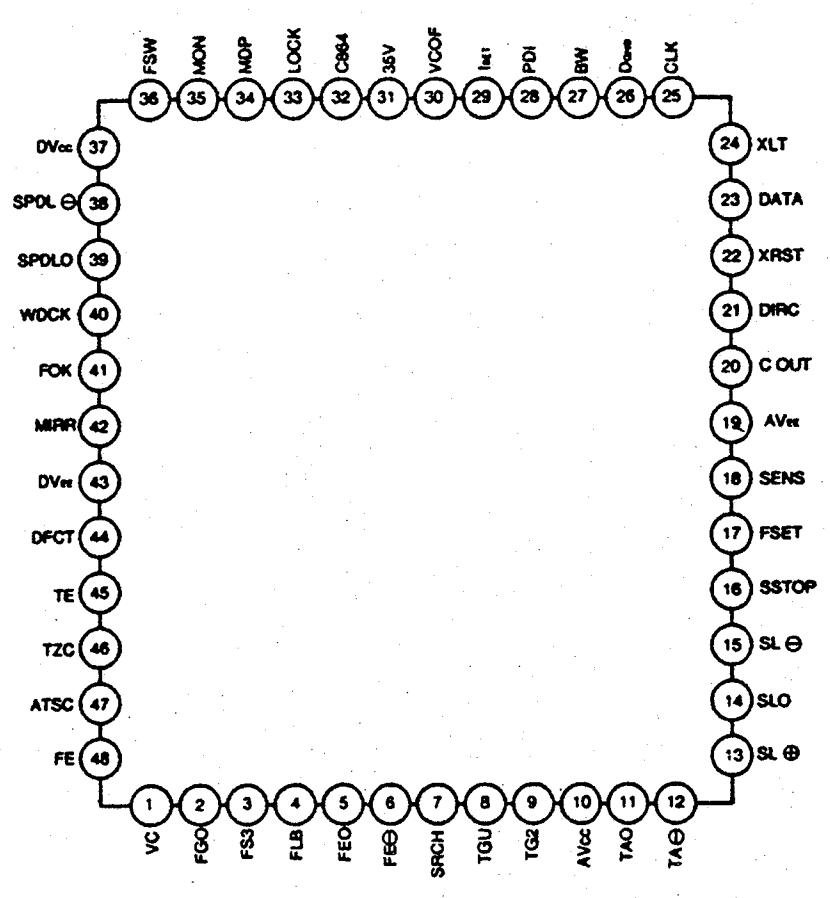
1 VC
2 FGO
3 FS3
4 FLB
5 FEO
6 FE⊖
7 SRCH
8 TGU
9 TG2
10 AVcc
11 TAO
12 TA⊖
13 SL ⊕
14 SLO
15 SL ⊖
16 SSTOP
17 FSET
18 SENS
19 AVee
20 C OUT
21 DIRC
22 XRST
23 DATA
24 XLT
25 CLK
26 Dvee
27 BW
28 PDI
29 Iset
30 VCOF
31 35V
32 C864
33 LOCK
34 MDP
35 MON
36 FSW
37 DVcc
38 SPDL ⊖
39 SPDLO
40 WDCK
41 FOK
42 MIRR
43 DVee
44 DFCT
45 TE
46 TZC
47 ATSC
48 FE

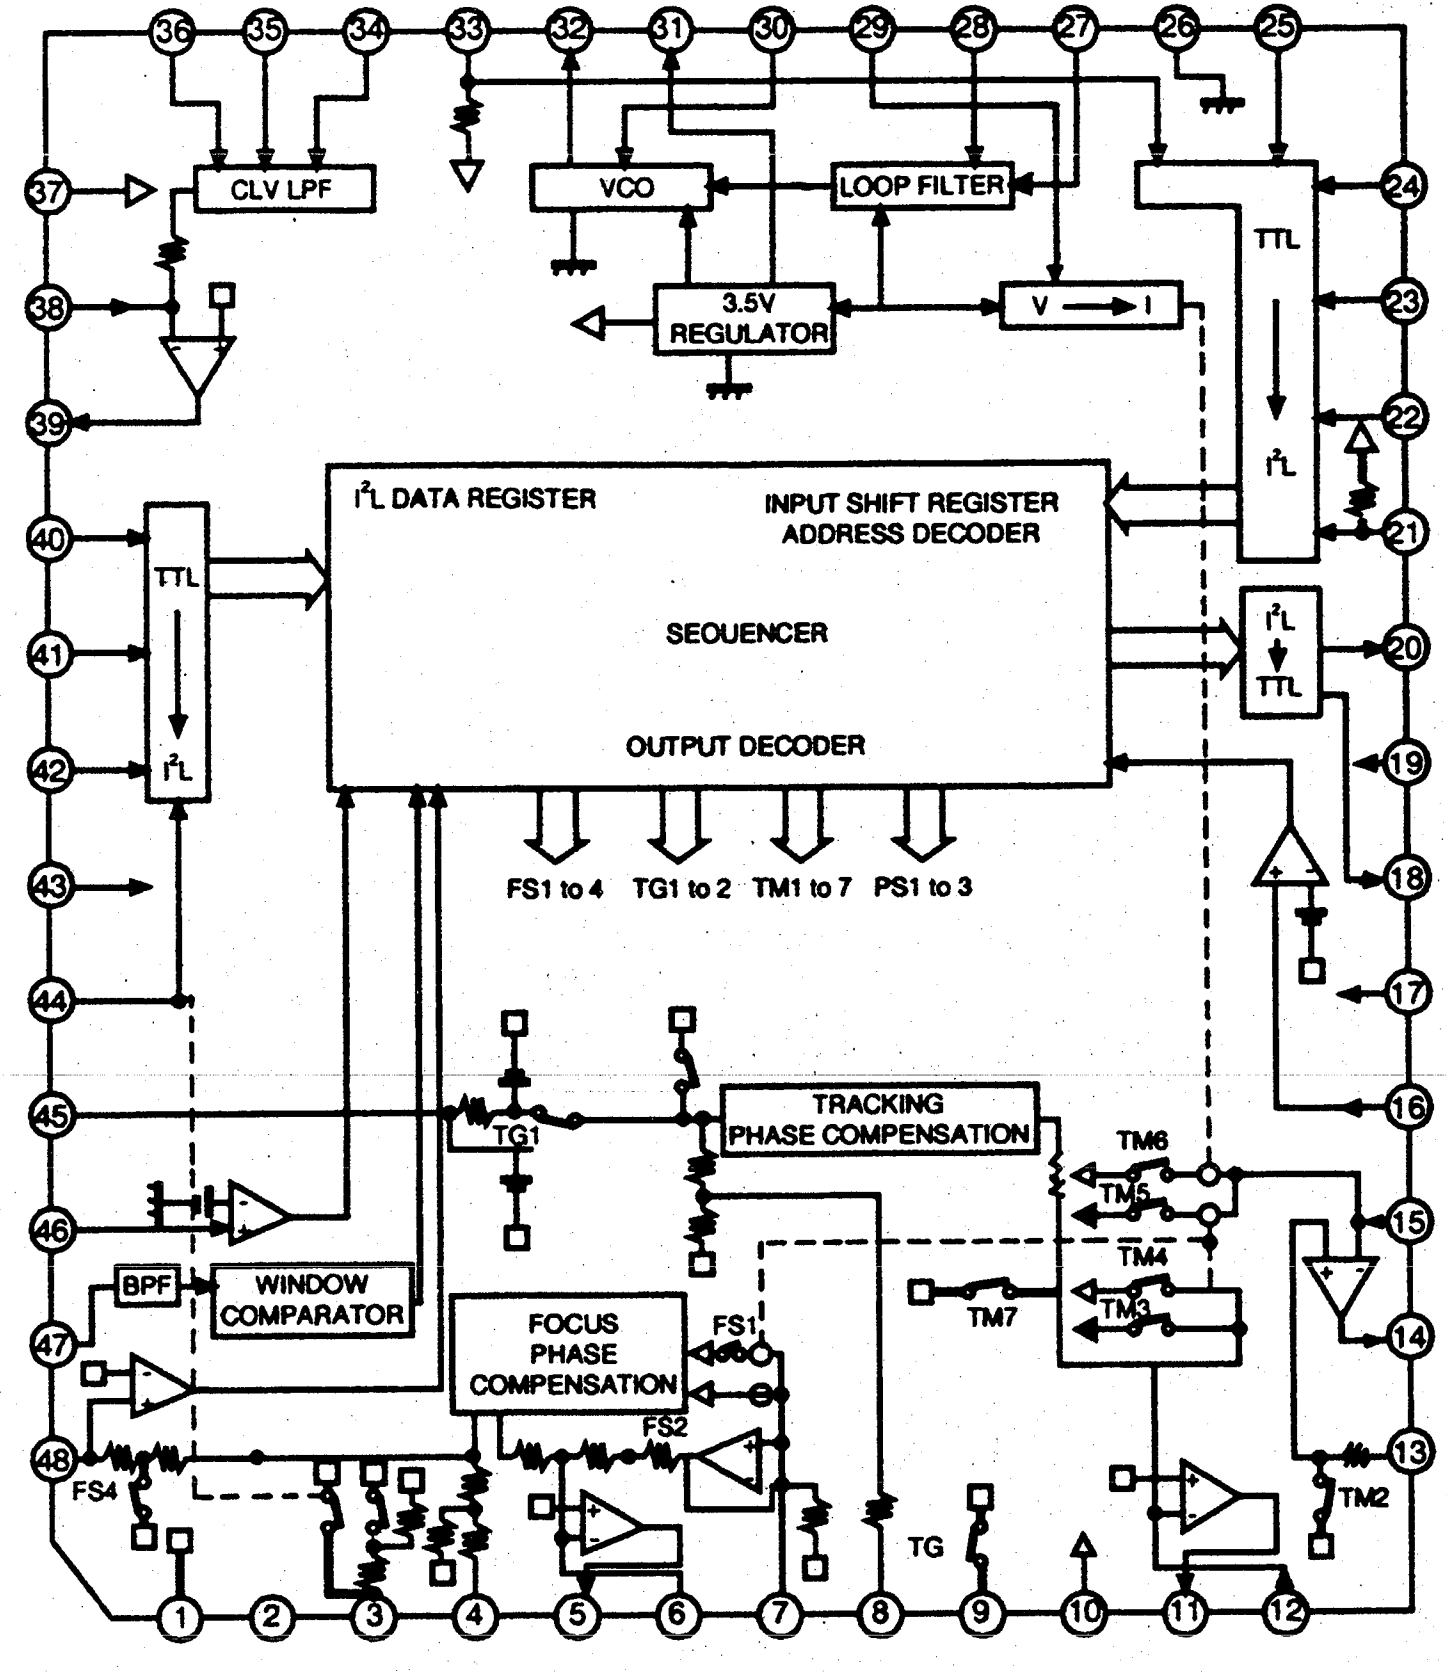
CLV LPF
VCO
LOOP FILTER
3.5V REGULATOR
V → I
TTL
I²L
I²L DATA REGISTER
INPUT SHIFT REGISTER ADDRESS DECODER
SEOUENCER
OUTPUT DECODER
FS1 to 4
TG1 to 2
TM1 to 7
PS1 to 3
TRACKING PHASE COMPENSATION
TM6
TM5
TM4
TM3
TM7
TM2
TG1
TG
FS1
FS2
FS4
BPF
WINDOW COMPARATOR
FOCUS PHASE COMPENSATION

TDA1311

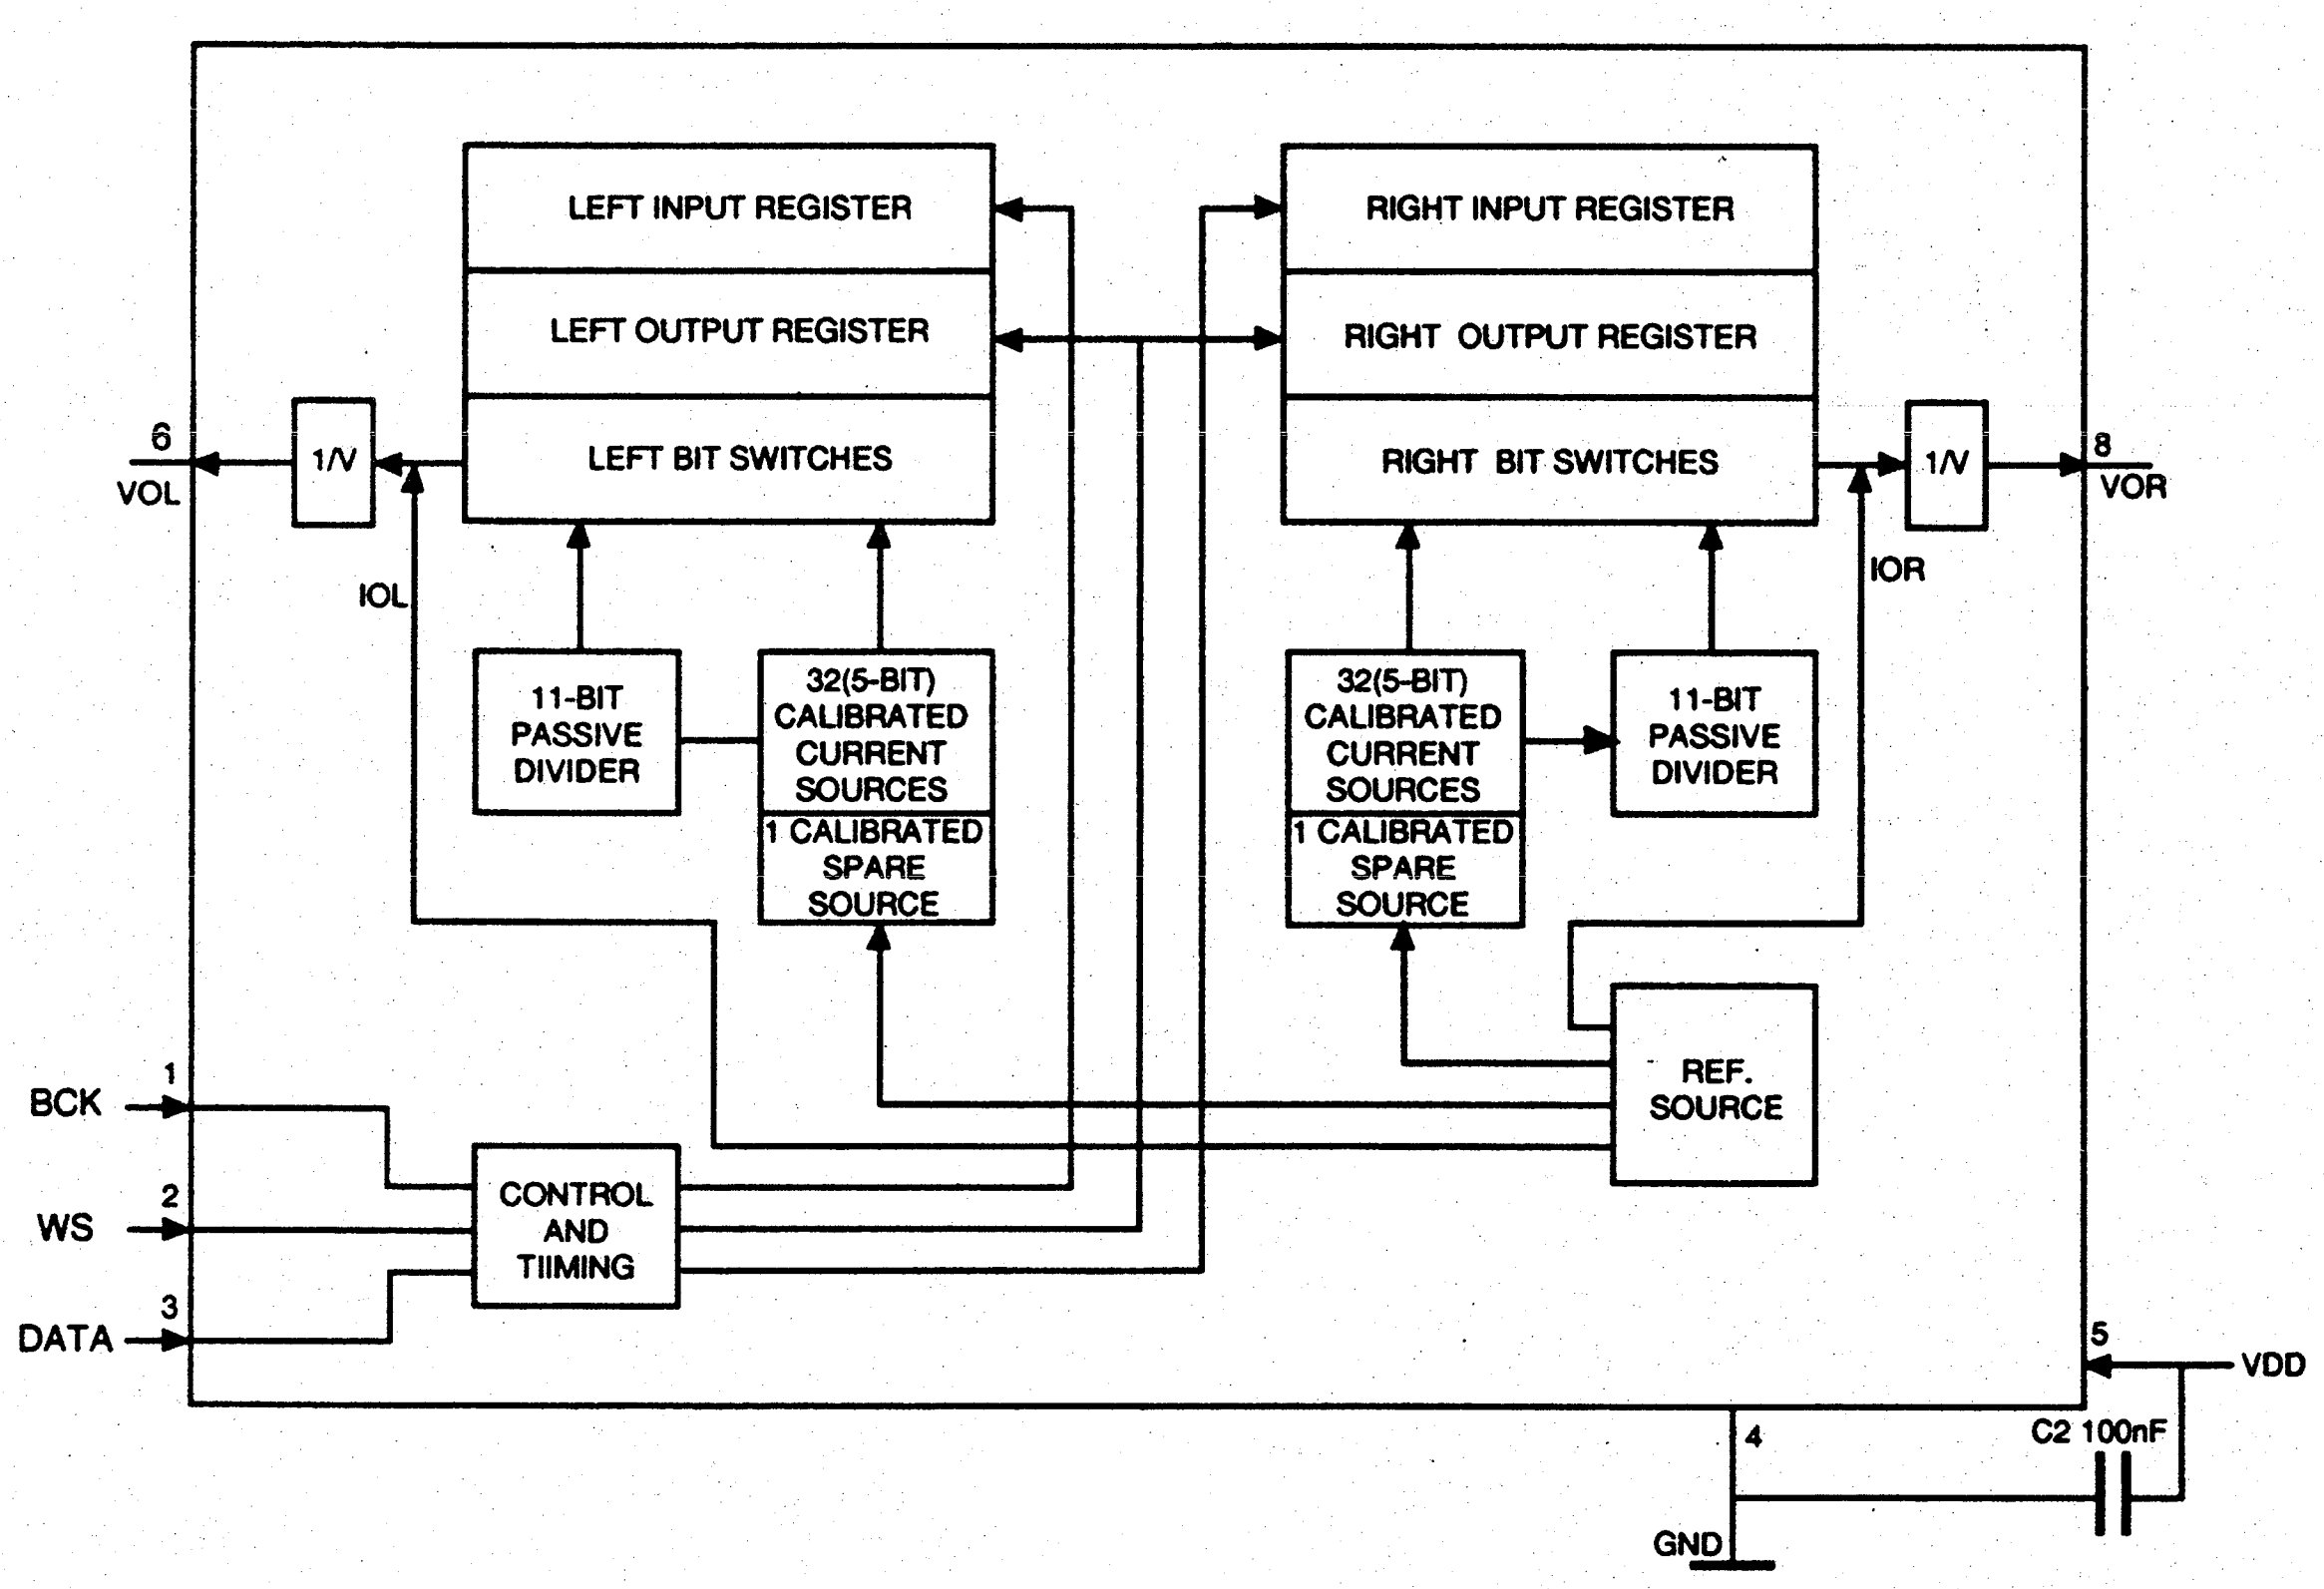
LEFT INPUT REGISTER
LEFT OUTPUT REGISTER
LEFT BIT SWITCHES
RIGHT INPUT REGISTER
RIGHT OUTPUT REGISTER
RIGHT BIT SWITCHES
11-BIT PASSIVE DIVIDER
32(5-BIT) CALIBRATED CURRENT SOURCES
1 CALIBRATED SPARE SOURCE
32(5-BIT) CALIBRATED CURRENT SOURCES
1 CALIBRATED SPARE SOURCE
11-BIT PASSIVE DIVIDER
1/V
1/V
6 VOL
8 VOR
IOL
IOR
REF. SOURCE
CONTROL AND TIIMING
1 BCK
2 WS
3 DATA
5 VDD
4 GND
C2 100nF

CXD1167(DSP)

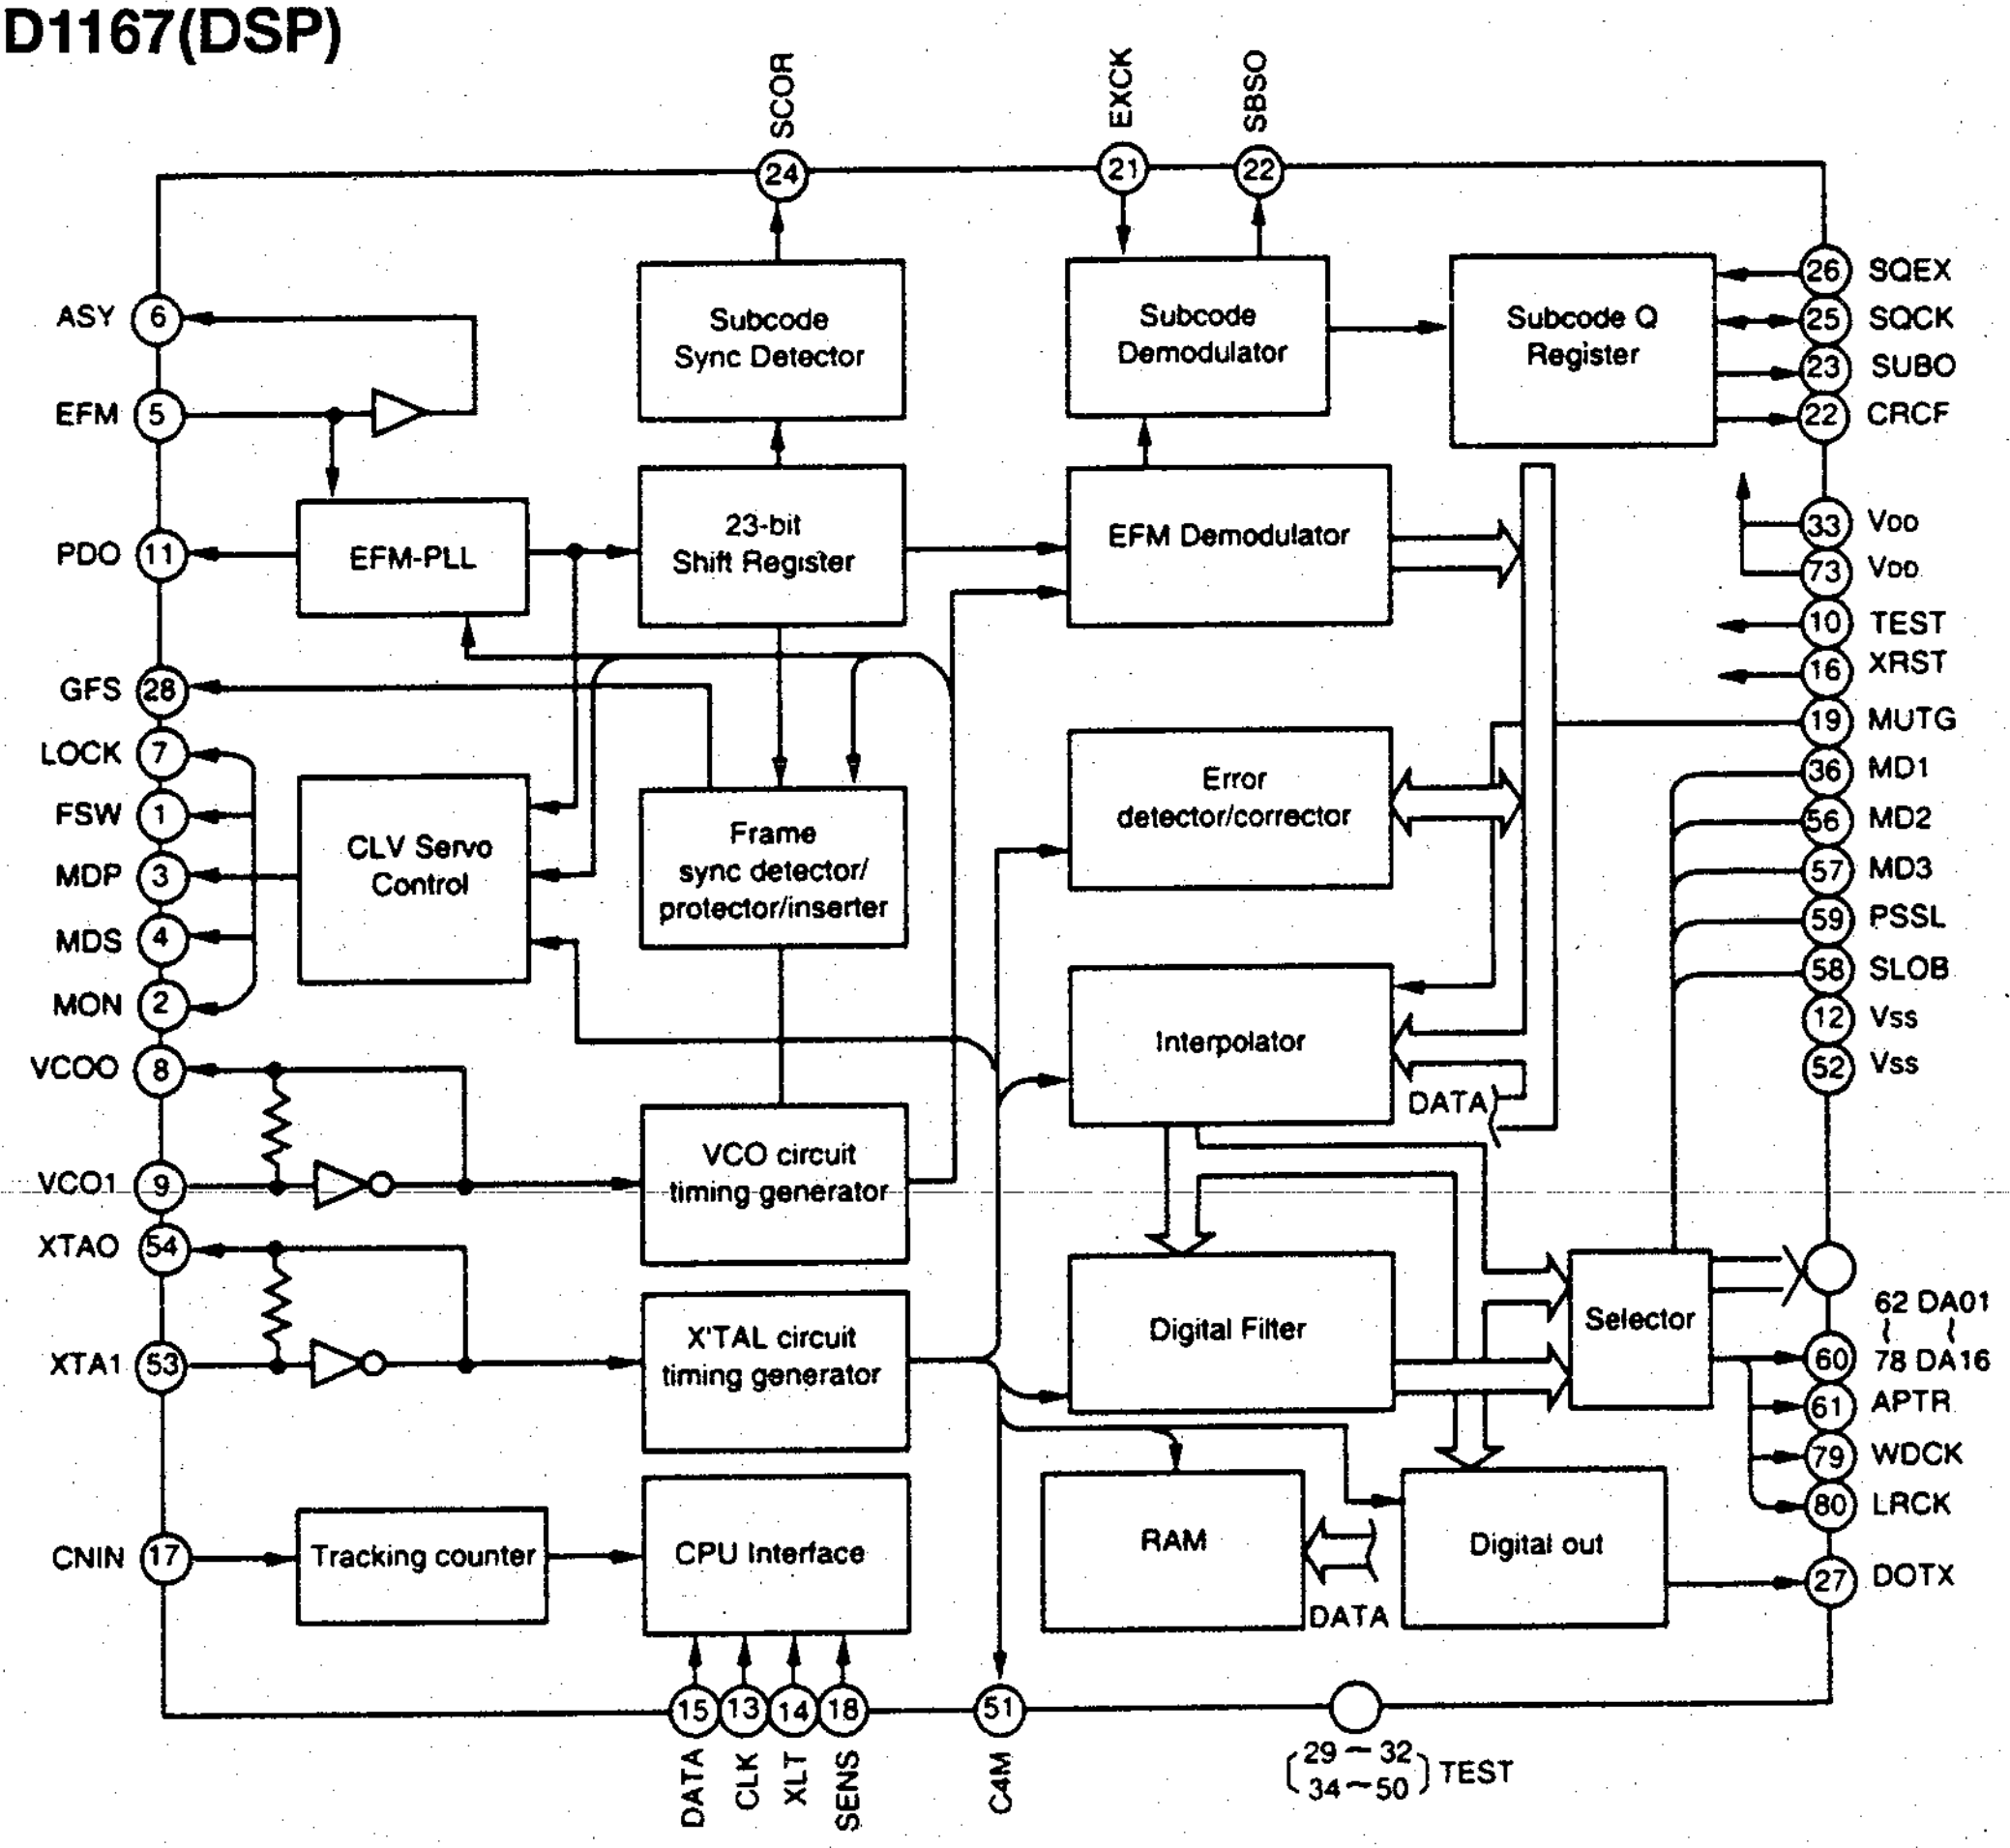
SCOR
EXCK
SBSO
24
21
22
ASY 6
EFM 5
PDO 11
GFS 28
LOCK 7
FSW 1
MDP 3
MDS 4
MON 2
VCOO 8
VCO1 9
XTAO 54
XTA1 53
CNIN 17
Subcode Sync Detector
Subcode Demodulator
Subcode Q Register
EFM-PLL
23-bit Shift Register
EFM Demodulator
CLV Servo Control
Frame sync detector/ protector/inserter
Error detector/corrector
Interpolator
DATA
VCO circuit timing generator
X'TAL circuit timing generator
Digital Filter
Selector
RAM
Digital out
DATA
Tracking counter
CPU Interface
26 SQEX
25 SQCK
23 SUBO
22 CRCF
33 VDD
73 VDD
10 TEST
16 XRST
19 MUTG
36 MD1
56 MD2
57 MD3
59 PSSL
58 SLOB
12 Vss
52 Vss
62 DA01 ~ 78 DA16
60
61 APTR
79 WDCK
80 LRCK
27 DOTX
15 13 14 18
51
DATA
CLK
XLT
SENS
C4M
29 ~ 32
34 ~ 50
TEST

BA6296FP

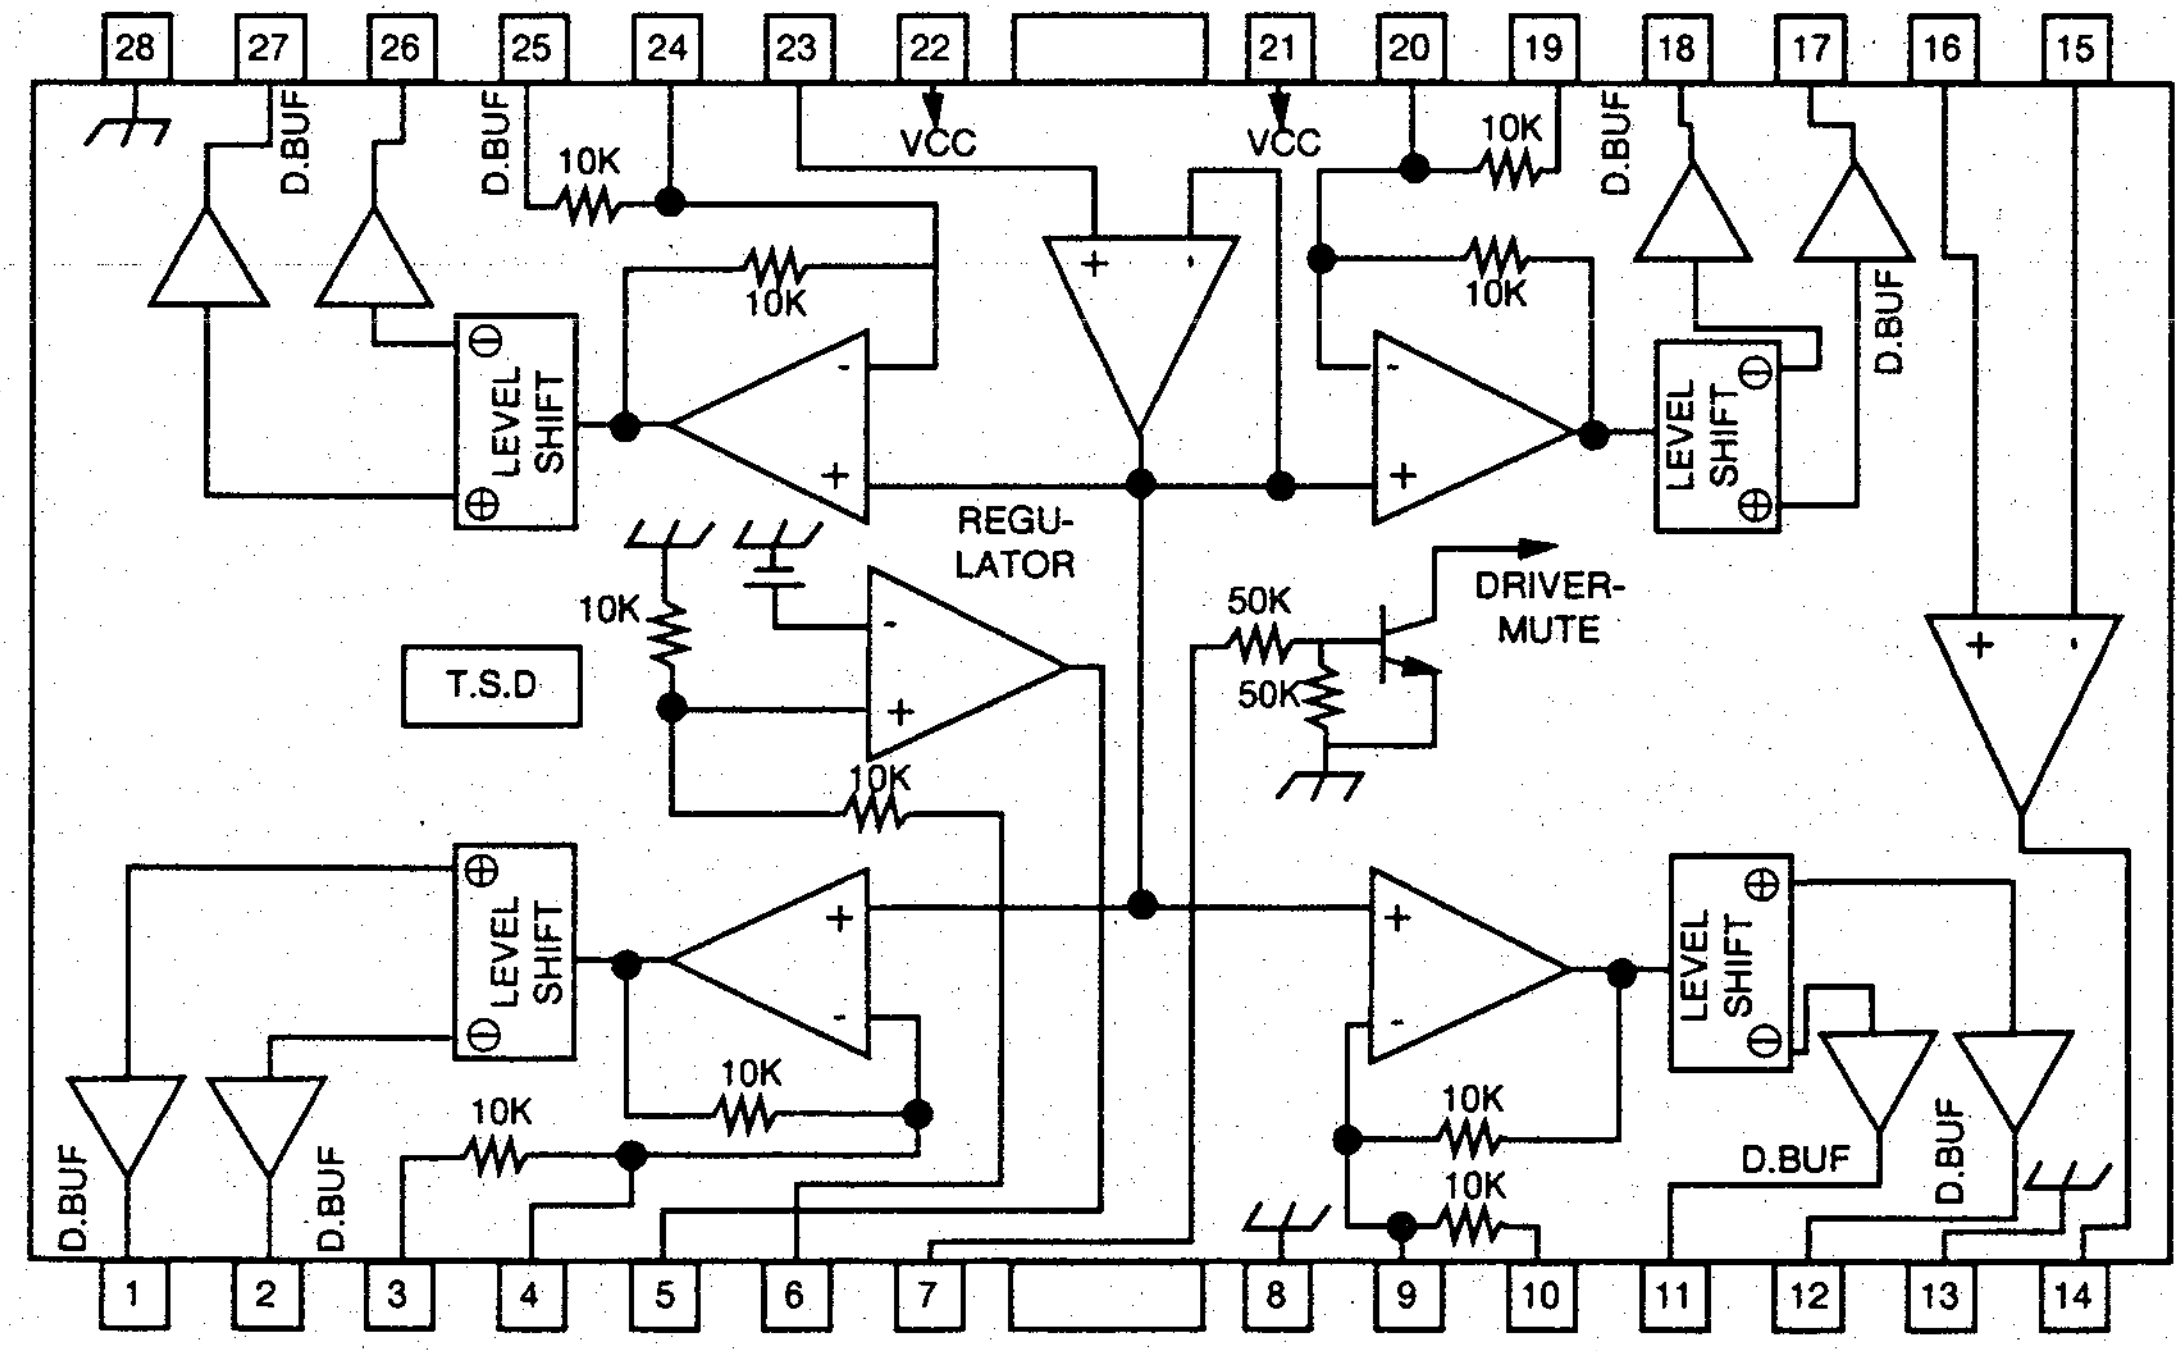
28
27
26
25
24
23
22
21
20
19
18
17
16
15
D.BUF
D.BUF
10K
10K
VCC
VCC
10K
10K
D.BUF
D.BUF
LEVEL SHIFT
LEVEL SHIFT
REGU-LATOR
10K
10K
T.S.D
50K
50K
DRIVER-MUTE
LEVEL SHIFT
LEVEL SHIFT
10K
10K
10K
10K
D.BUF
D.BUF
D.BUF
D.BUF
1
2
3
4
5
6
7
8
9
10
11
12
13
14

NOTES

EXPLODED VIEW/PARTS LIST

● CABINET

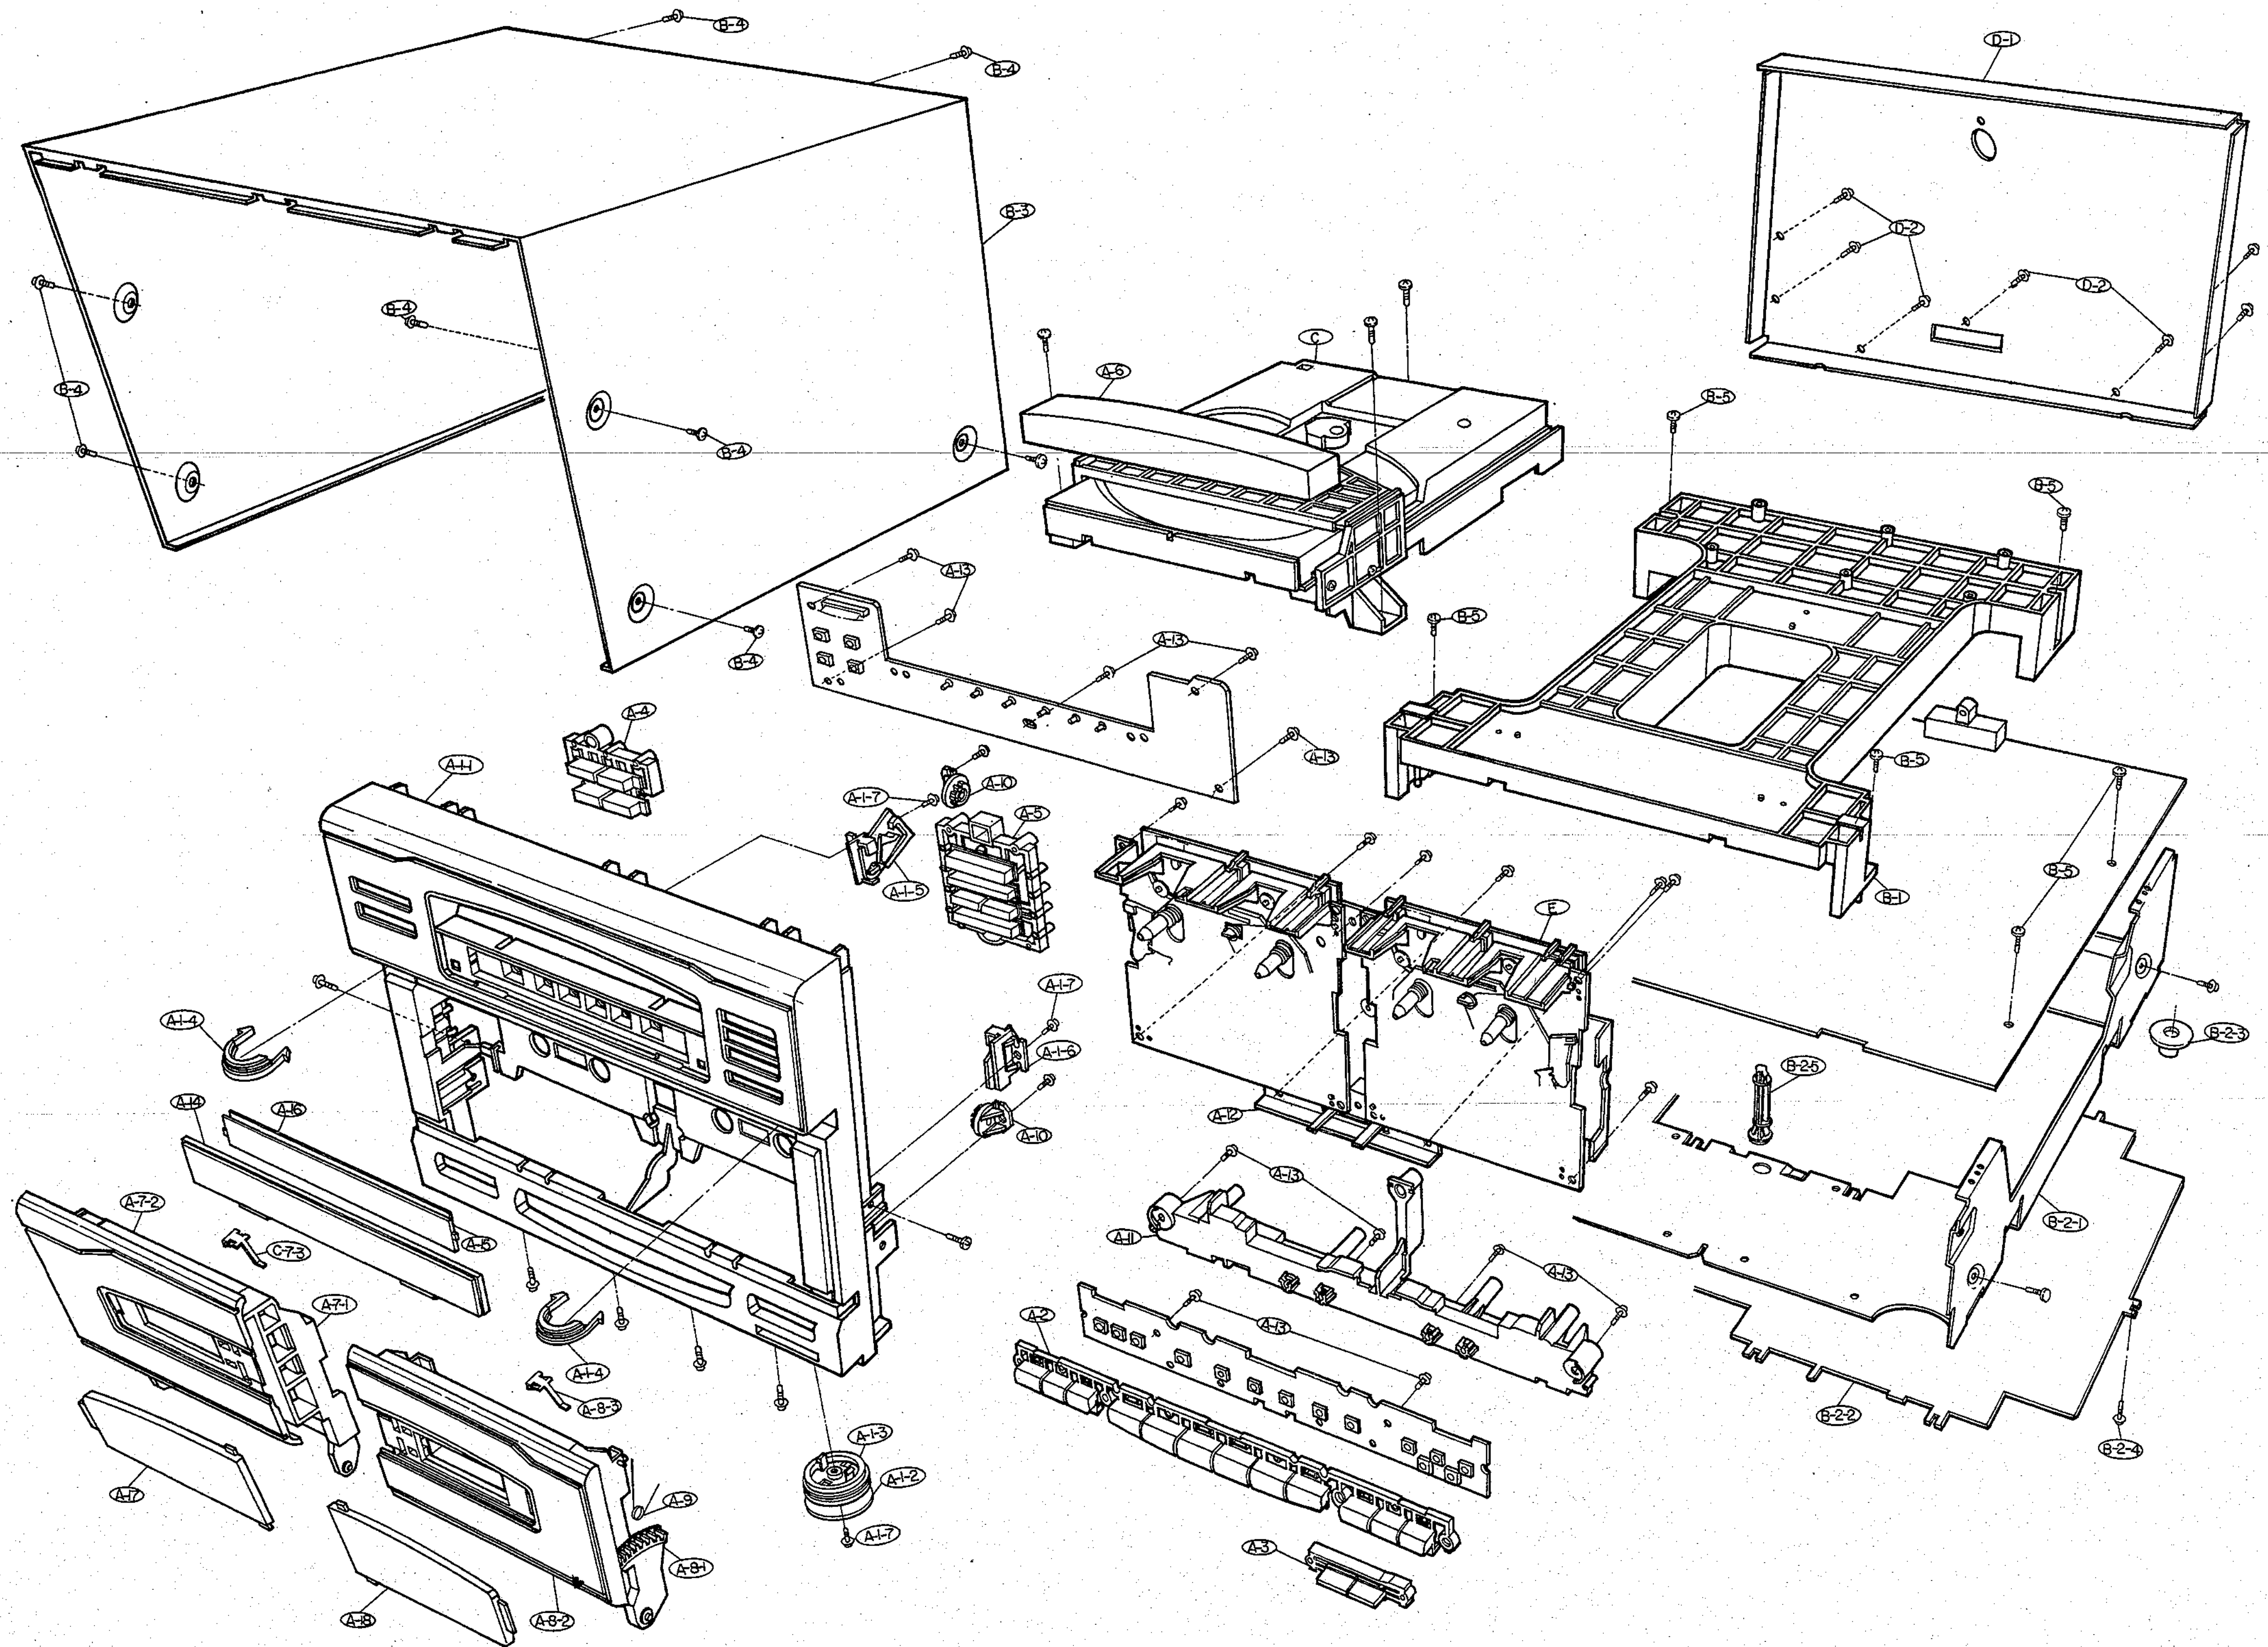

REF. NO.	PART NO.	DESCRIPTION	Q'TY
A	3721S-0606A	Panel Assembly, Front	1
A-1	3721SU0606A	Panel Sub Assembly, Front	1
A-1-1	3720S-0606A	Panel, Front	1
A-1-2	472-190G	Felt	2
A-1-3	265-606A	Foot, Front	2
A-1-4	264-606A	Leg, Foot	2
A-1-5	384-012A	Guide Assembly Eject-L	1
A-1-6	384-013A	Guide Assembly Eject-R	1
A-1-7	353-025C	Screw, Special 3 × 10	4
A-2	4940S-0606A	Knob, Deck Function #12	1
A-3	4940S-0605A	Knob, Dubbing	1
A-4	4940S-0603A	Knob, CD Function #4	1
A-5	4940S-0601A	Knob, CD Function #5	1
A-6	226-608A	Door, CD	1
A-7	226-566A	Door Assembly, Cassette-Left	1
A-7-1	221-606A	Door, Cassette-Left	1
A-7-2	221-606A	Cover, Door Cassette-Left	1
A-7-3	442-211C	Spring	1
A-8	226-567A	Door Assembly, Cassette-Right	1
A-8-1	226-607A	Door, Cassette-R	1
A-8-2	221-607A	Cover, Door Cassette-R	1
A-8-3	442-211C	Spring	1
A-9	442-085D	Spring	2
A-10	444-115A	Damper Assembly	2
A-11	324-606A	Holder, Deck Mechanism	1
A-12	4810S-0206A	Bracket, Deck Frame	1
A-13	353-025K	Screw, Special 3 × 12	21
A-14	236-957A	Window, Function	1
A-15	236-958A	Window, Inner Function	1
A-16	236-959A	Window, Inner Cover	1
A-17	236-955A	Window, Cassette-L	1
A-18	236-956A	Window, Cassette-R	1
B	3141S-0606A	Chassis Assembly, Main	1
B-1	3140S-0607A	Chassis, CD Frame	1
B-2	3141SU0606A	Chassis Sub Assembly, Main	1
B-2-1	3140S-0606A	Chassis, Main	1
B-2-2	256-866A	Plate, Bottom	1
B-2-3	265-013A	Foot, Rubber	2
B-2-4	1TRL0302016	Screw, 3 × 6	1
B-2-5	322-001D	Supporter	1
B-3	213-606B	Cabinet, Top	1
B-4	353-025C	Screw, Special 3 × 10	11
B-5	1TRL0302418	Screw, 3 × 8	10
C	411-044B	Mechanism Assembly, CDM-X201	1
D	3721S-0607A	Panel Assembly, Back	1
D-1	3720S-0607A	Panel, Back	1
D-2	353-025C	Screw, Special 3 × 10	7
E	419-005H	Deck Mechanism, CWA407-RR	1

NOTE : Ref. No. shows a group unit of assembly.

EXPLODED VIEW/PARTS LIST

● TAPE DECK MECHANISM

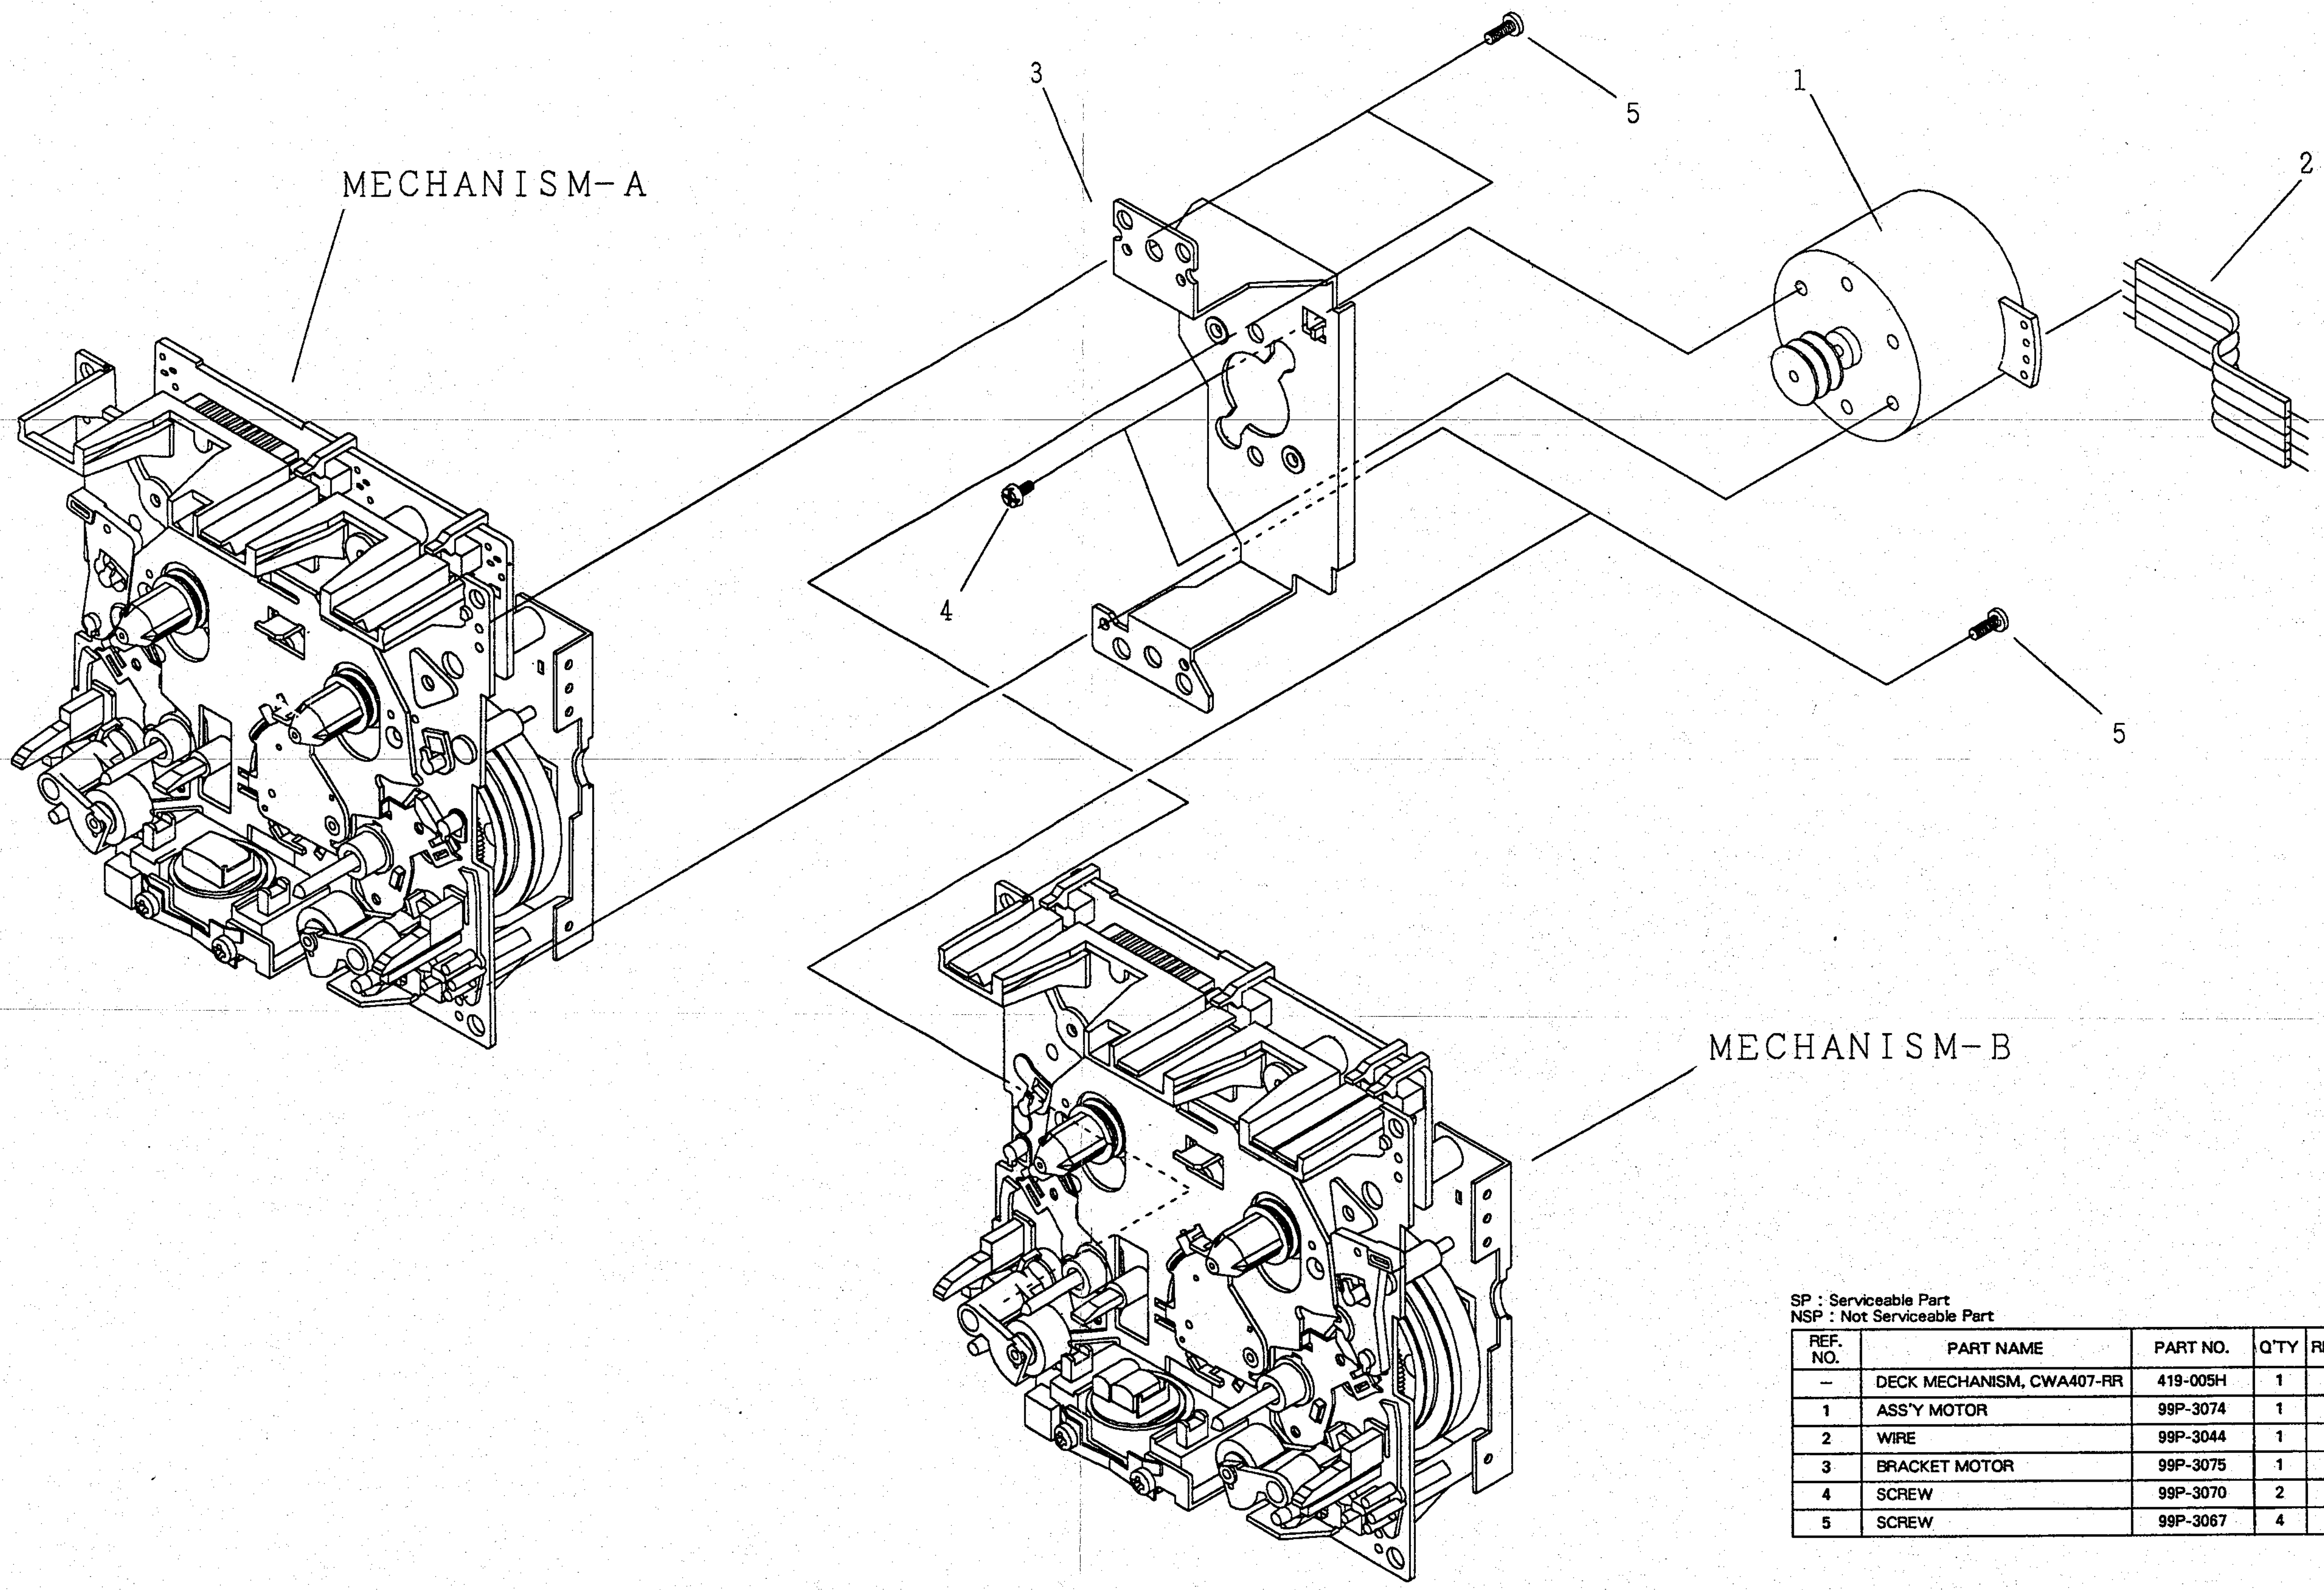

SP : Serviceable Part
NSP : Not Serviceable Part

REF. NO.	PART NAME	PART NO.	Q'TY	REMARK
–	DECK MECHANISM, CWA407-RR	419-005H	1	SP
1	ASS'Y MOTOR	99P-3074	1	SP
2	WIRE	99P-3044	1	NSP
3	BRACKET MOTOR	99P-3075	1	SP
4	SCREW	99P-3070	2	SP
5	SCREW	99P-3067	4	NSP

EXPLODED VIEW/PARTS LIST

● TAPE DECK MECHANISM-A

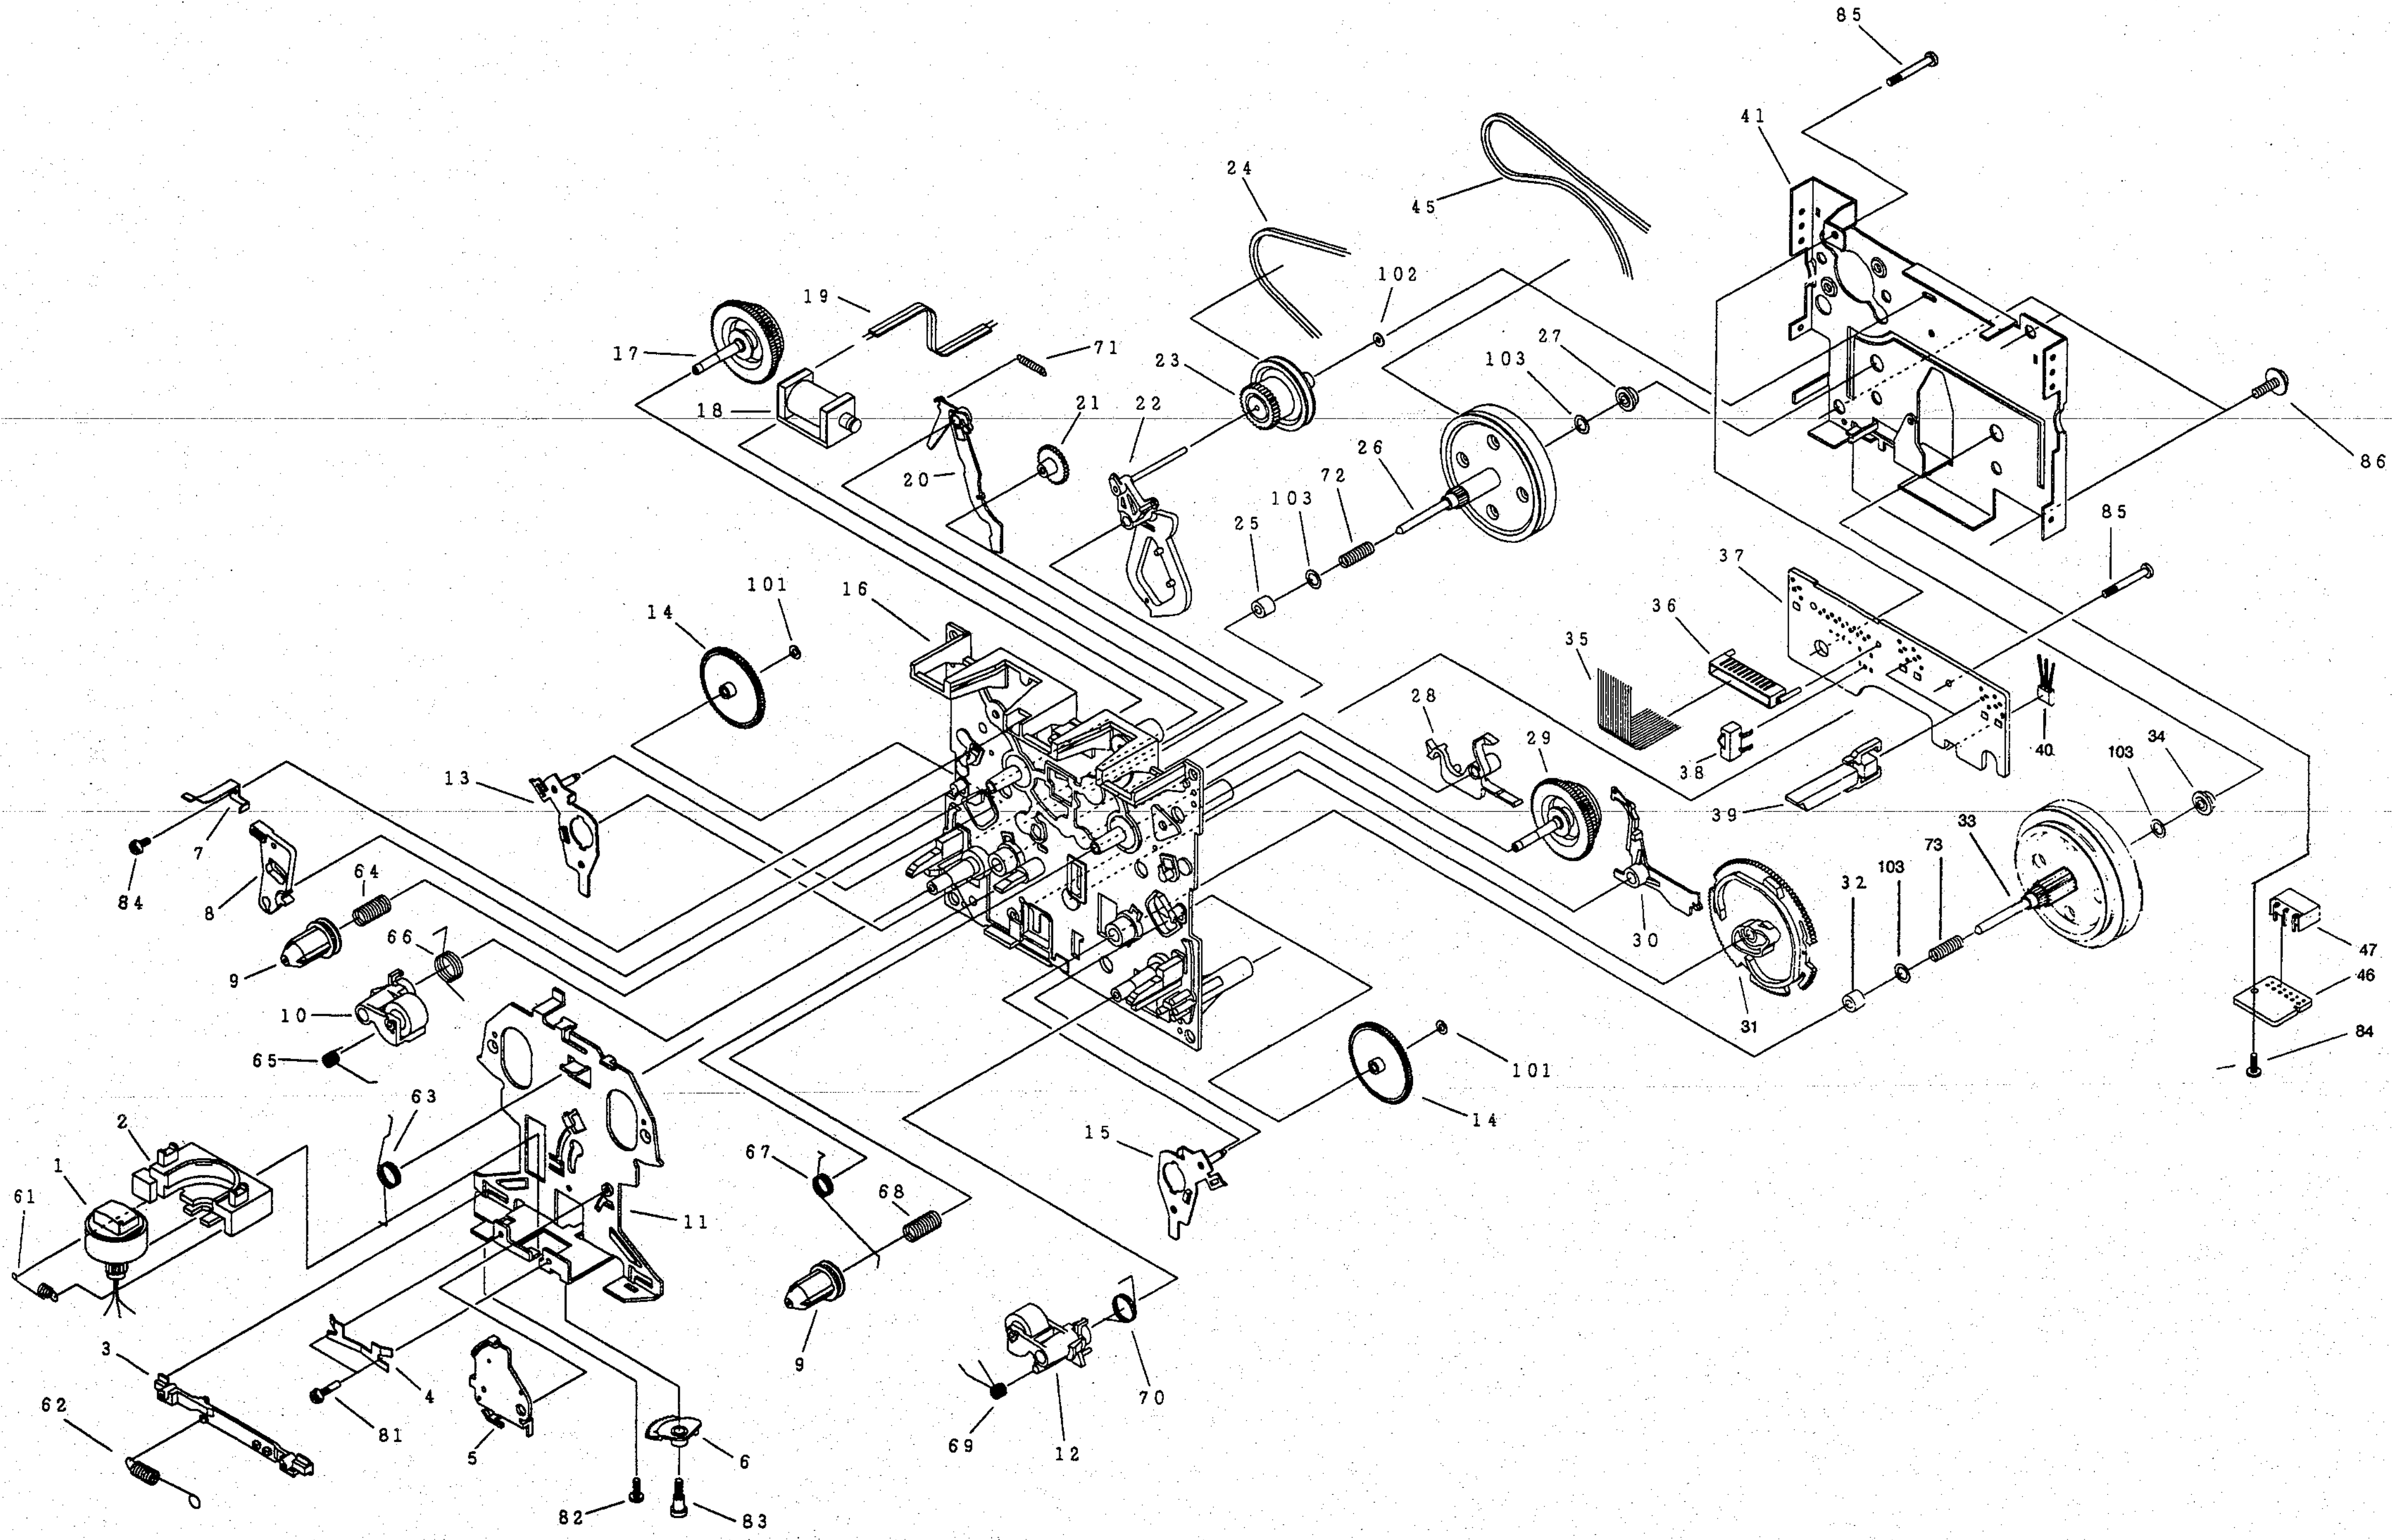

SP : Serviceable Part
NSP : Not Serviceable Part

REF. NO.	PART NAME	PART NO.	Q'TY	REMARK
1	ASS'Y HOLDER HEAD	99P-3076	1	SP
2	FLAME HEAD	99P-3002	1	NSP
3	LEVER HEAD	99P-3003	1	NSP
4	SPRING AZIMUTH	99P-3004	1	NSP
5	ASS'Y ARM ASSIST	99P-3005	1	NSP
6	GEAR ARM HEAD	99P-3006	1	NSP
7	SPRING CASSETTE	99P-3007	1	NSP
8	EJECT LOCK	99P-3008	1	NSP
9	CAP REEL	99P-3009	2	NSP
10	ASS'Y PINCH ARM L	99P-3010	1	NSP
11	CHASSIS HEAD	99P-3011	1	NSP
12	ASS'Y PINCH ARM R	99P-3012	1	NSP
13	ASS'Y ARM PLAY L	99P-3013	1	NSP
14	GEAR PLAY	99P-3014	2	NSP
15	ASS'Y ARM PLAY R	99P-3015	1	NSP
16	CHASSIS OS.	99P-3016	1	NSP
17	ASS'Y SUR REEL L	99P-3017	1	NSP
18	SOLENOID	99P-3077	1	SP
19	WIRE	99P-3019	1	SP
20	ARM RVS	99P-3020	1	SP
21	GEAR FF	99P-3021	1	NSP
22	ASS'Y ARM FR	99P-3022	1	NSP
23	ASS'Y PULLEY FR	99P-3023	1	NSP
24	BELT FR	99P-3024	1	NSP
25	METAL	99P-3025	1	NSP
26	ASS'Y FLYWHEEL L	99P-3026	1	SP
27	METAL	99P-3027	1	NSP
28	ARM BRAKE	99P-3028	1	NSP
29	ASS'Y SUB REEL R	99P-3029	1	NSP
30	ARM TRIGER	99P-3030	1	NSP
31	GEAR CAM	99P-3031	1	NSP
32	METAL	99P-3032	1	NSP
33	ASS'Y FLYWHEEL R	99P-3033	1	SP
34	METAL	99P-3034	1	NSP
35	WIRE (11P)	99P-3078	1	SP
36	HOLDER WIRE	99P-3036	1	SP
37	P.C. BOARD	99P-3037	1	SP
38	SWITCH MODE	99P-3038	1	SP
39	SWITCH (LEAF)	99P-3039	2	SP
40	HALL IC.	99P-3040	1	SP
45	BELT MAIN	99P-3070	1	SP
46	P.C. BOARD	99P-3046	1	SP
47	HOUSING	99P-3050	1	SP
61	SPRING	99P-3051	1	NSP
62	SPRING	99P-3052	1	NSP
63	SPRING	99P-3053	1	NSP
64	SPRING	99P-3054	1	NSP
65	SPRING	99P-3055	1	NSP
66	SPRING	99P-3056	1	NSP
67	SPRING	99P-3057	1	NSP
68	SPRING	99P-3058	1	NSP
69	SPRING	99P-3059	1	NSP
70	SPRING	99P-3060	1	NSP
71	SPRING	99P-3061	1	NSP
72	SPRING	99P-3062	1	NSP
73	SPRING	99P-3063	1	NSP
81	SCREW	99P-3064	2	NSP
82	SCREW	99P-3065	1	NSP
83	SCREW	99P-3066	1	NSP
84	SCREW	99P-3067	2	NSP
85	SCREW	99P-3068	2	NSP
86	SCREW	99P-3069	3	NSP
101	WASHER	99P-3071	2	NSP
102	WASHER	99P-3072	1	NSP
103	WASHER	99P-3073	4	NSP

EXPLODED VIEW/PARTS LIST

● TAPE DECK MECHANISM-B

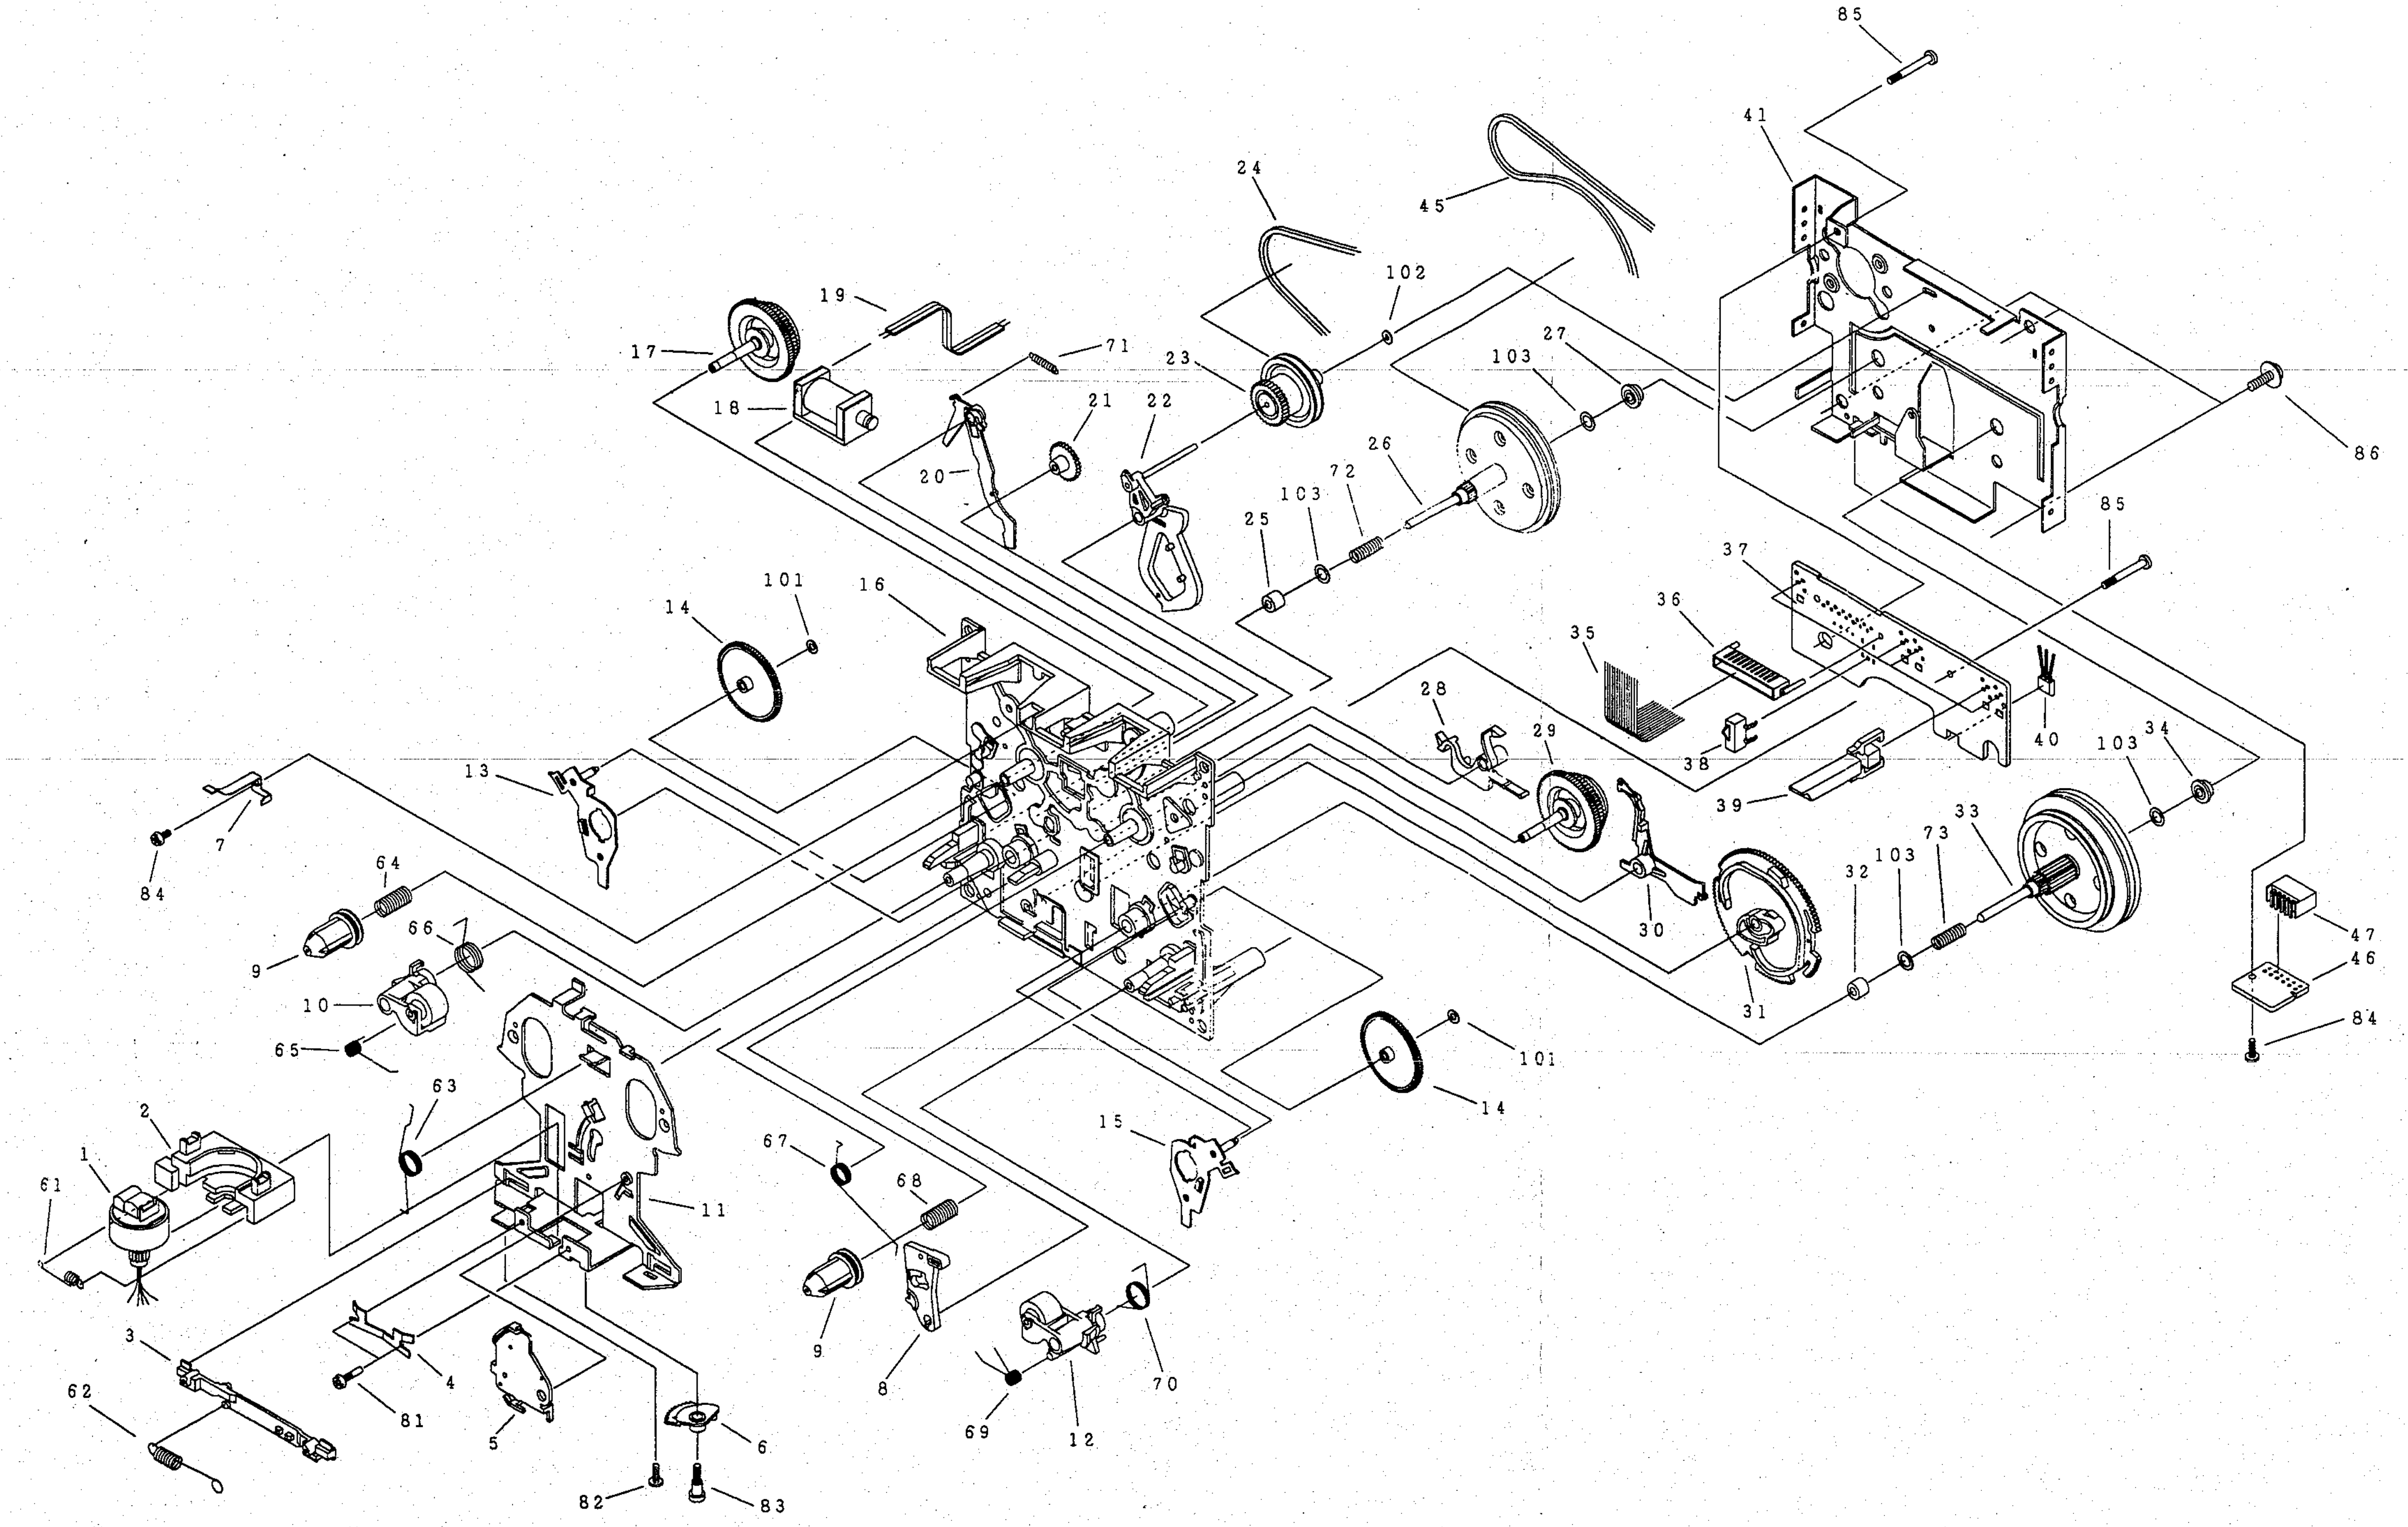

SP : Serviceable Part
NSP : Not Serviceable Part

REF. NO.	PART NAME	PART NO.	Q'TY	REMARK
1	ASS'Y HOLDER HEAD	99P-3084	1	SP
2	FLAME HEAD	99P-3002	1	NSP
3	LEVER HEAD	99P-3003	1	NSP
4	SPRING AZIMUTH	99P-3004	1	NSP
5	ASS'Y ARM ASSIST	99P-3005	1	NSP
6	GEAR ARM HEAD	99P-3006	1	NSP
7	SPRING CASSETTE	99P-3007	1	NSP
8	EJECT LOCK	99P-3008	1	NSP
9	CAP REEL	99P-3009	2	NSP
10	ASS'Y PINCH ARM L	99P-3010	1	NSP
11	CHASSIS HEAD	99P-3011	1	NSP
12	ASS'Y PINCH ARM R	99P-3012	1	NSP
13	ASS'Y ARM PLAY L	99P-3013	1	NSP
14	GEAR PLAY	99P-3014	2	NSP
15	ASS'Y ARM PLAY R	99P-3015	1	NSP
16	CHASSIS OS.	99P-3016	1	NSP
17	ASS'Y SUR REEL L	99P-3017	1	NSP
18	SOLENOID	99P-3077	1	SP
19	WIRE	99P-3019	1	SP
20	ARM RVS	99P-3020	1	SP
21	GEAR FF	99P-3021	1	NSP
22	ASS'Y ARM FR	99P-3022	1	NSP
23	ASS'Y PULLEY FR	99P-3023	1	NSP
24	BELT FR	99P-3024	1	NSP
25	METAL	99P-3025	1	NSP
26	ASS'Y FLYWHEEL L	99P-3081	1	SP
27	METAL	99P-3027	1	NSP
28	ARM BRAKE	99P-3028	1	NSP
29	ASS'Y SUB REEL R	99P-3029	1	NSP
30	ARM TRIGER	99P-3030	1	NSP
31	GEAR CAM	99P-3031	1	NSP
32	METAL	99P-3032	1	NSP
33	ASS'Y FLYWHEEL R2	99P-3082	1	SP
34	METAL	99P-3034	1	NSP
35	WIRE (13P)	99P-3035	1	SP
36	HOLDER WIRE	99P-3036	1	SP
37	P.C. BOARD	99P-3037	1	SP
38	SWITCH MODE	99P-3038	1	SP
39	SWITCH (LEAF)	99P-3039	4	SP
40	HALL IC.	99P-3040	1	SP
41	BRACKET FW	99P-3041	1	SP
45	BELT MAIN	99P-3083	1	SP
46	P.C. BOARD	99P-3046	1	SP
47	HOUSING	99P-3047	1	SP
61	SPRING	99P-3051	1	NSP
62	SPRING	99P-3052	1	NSP
63	SPRING	99P-3053	1	NSP
64	SPRING	99P-3054	1	NSP
65	SPRING	99P-3055	1	NSP
66	SPRING	99P-3056	1	NSP
67	SPRING	99P-3057	1	NSP
68	SPRING	99P-3058	1	NSP
69	SPRING	99P-3059	1	NSP
70	SPRING	99P-3060	1	NSP
71	SPRING	99P-3061	1	NSP
72	SPRING	99P-3062	1	NSP
73	SPRING	99P-3063	1	NSP
81	SCREW	99P-3064	2	NSP
82	SCREW	99P-3065	1	NSP
83	SCREW	99P-3066	1	NSP
84	SCREW	99P-3067	2	NSP
85	SCREW	99P-3068	2	NSP
86	SCREW	99P-3069	3	NSP
101	WASHER	99P-3071	2	NSP
102	WASHER	99P-3072	1	NSP
103	WASHER	99P-3073	4	NSP

EXPLODED VIEW/PARTS LIST

● CD MECHANISM

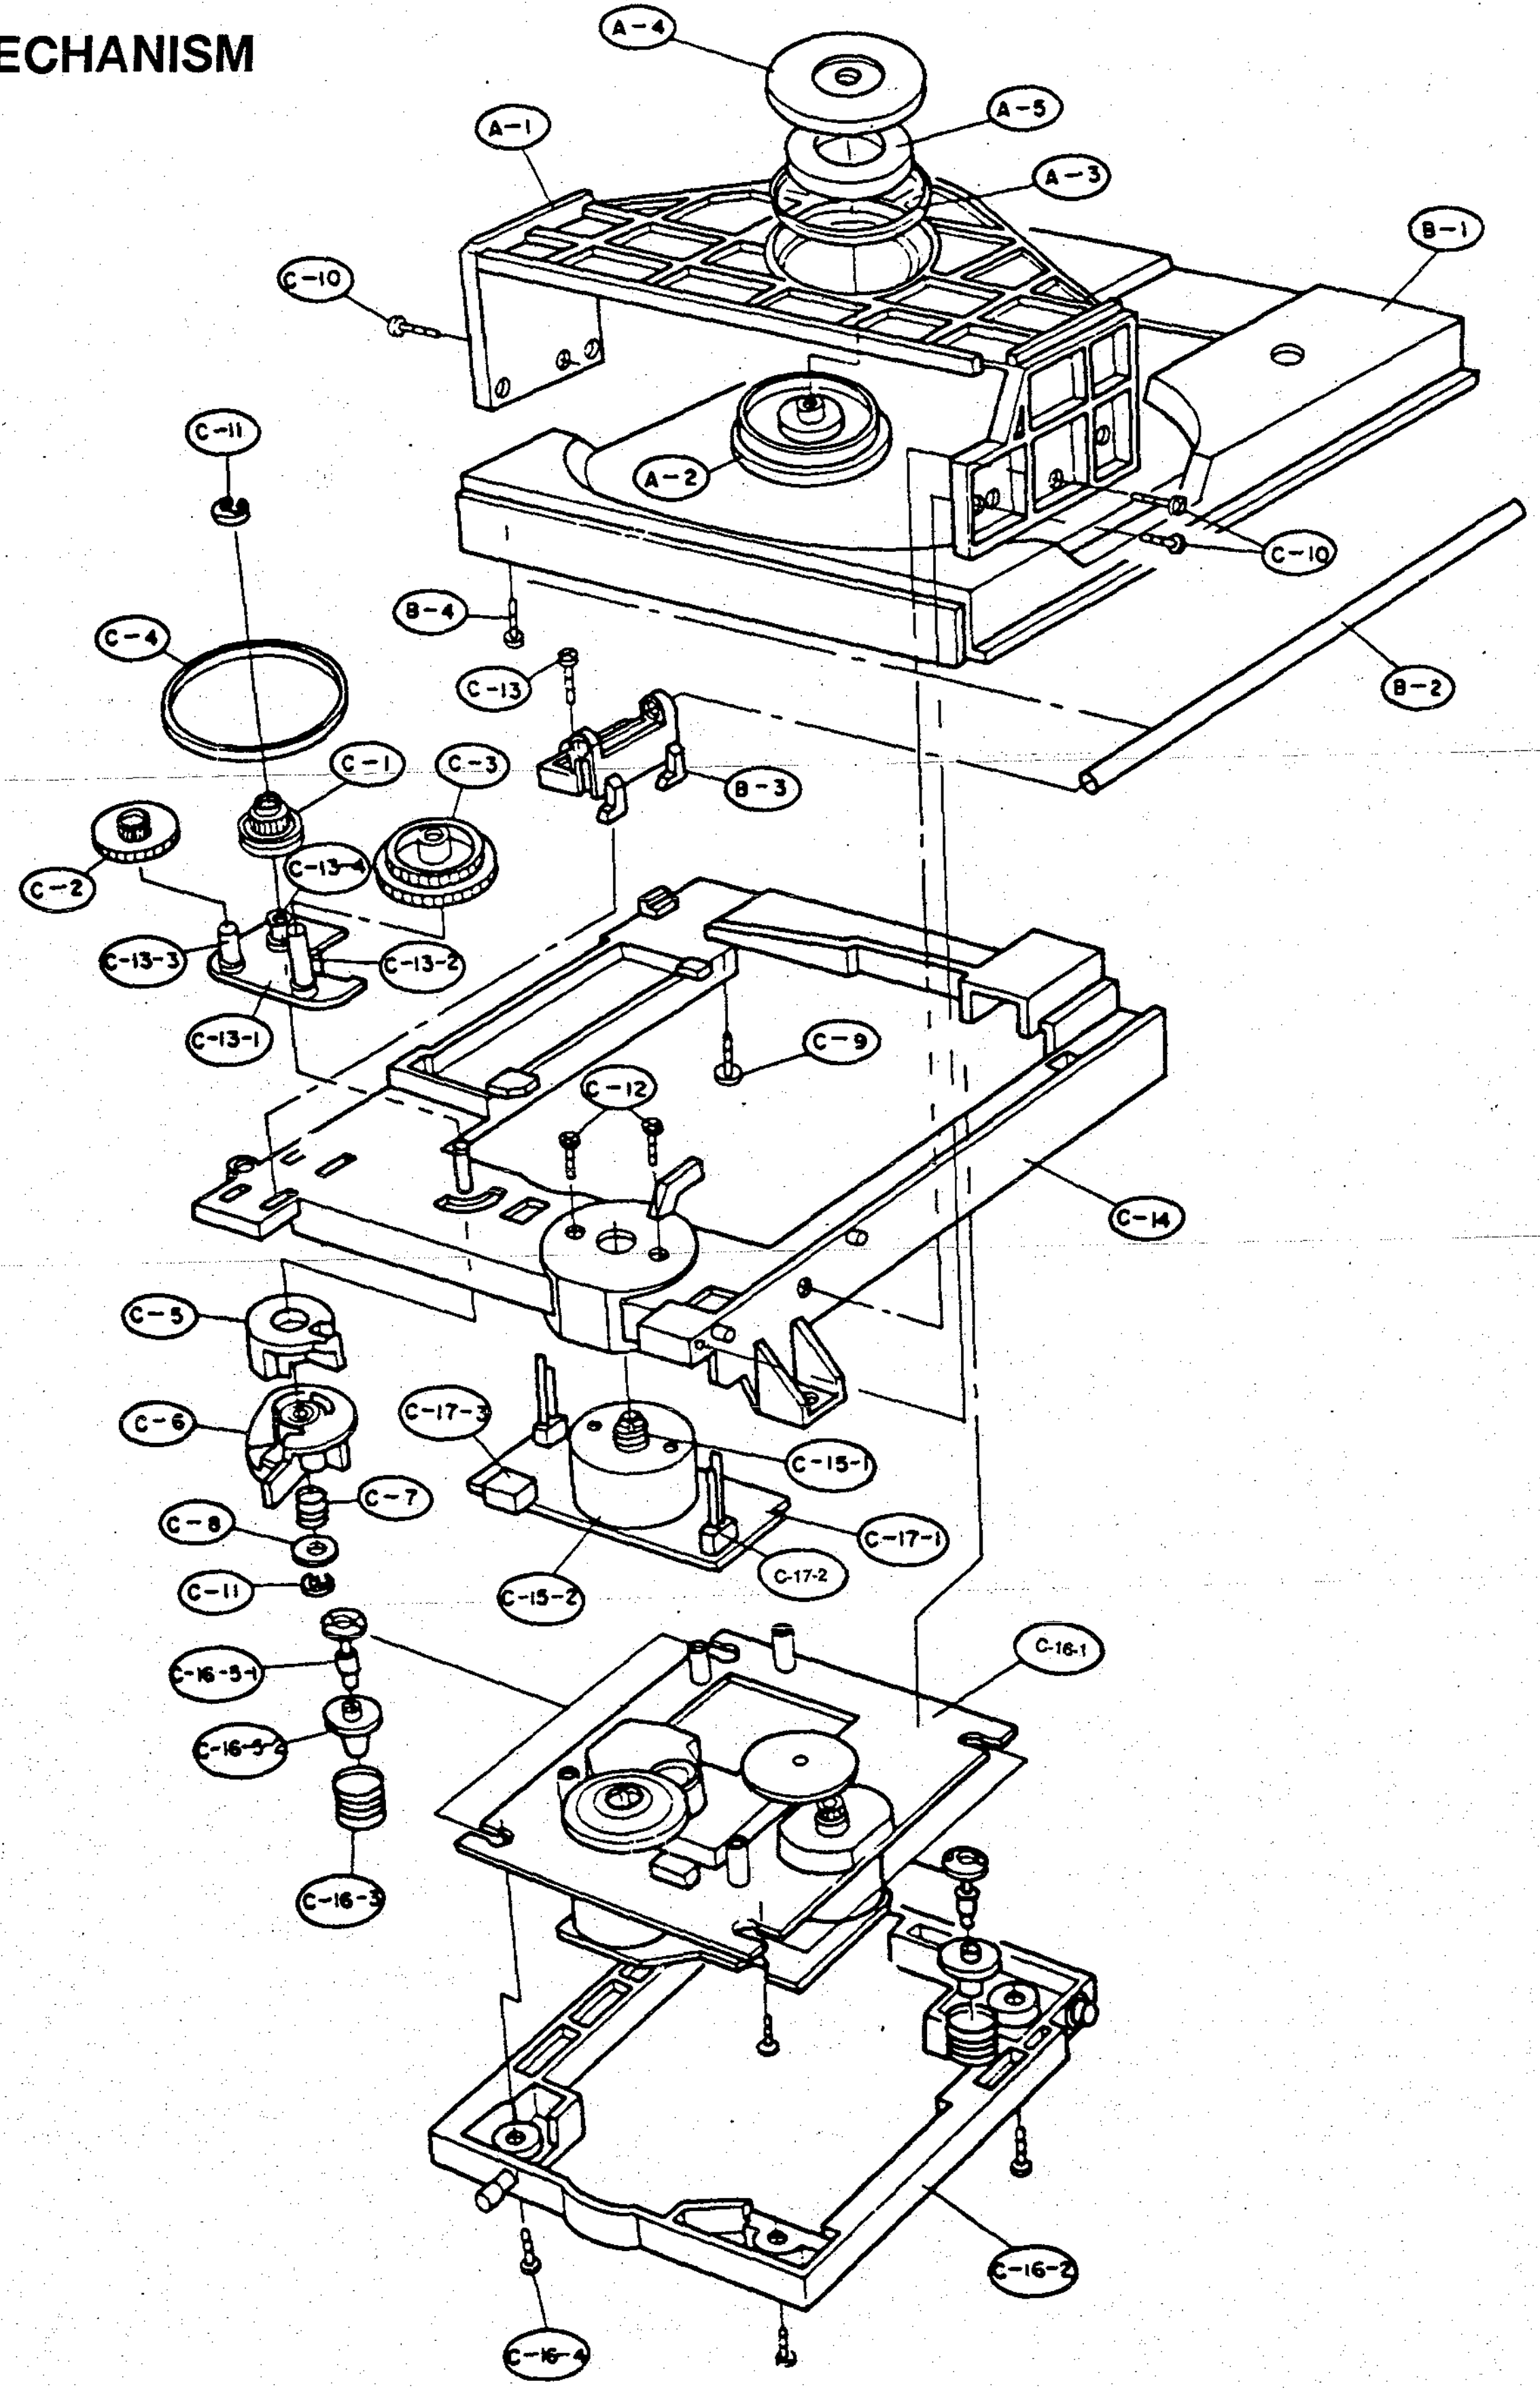

REF.NO.	DESCRIPTION	PART NO.	Q'TY
-	Mechanism Assembly, CDM-X201	411-044B	1
A	SUPPORTER, CLAMP AY	322-321A	1
A-1	SUPPORTER, CLAMP	322-322A	1
A-2	CLAMP, DISC	327-013A	1
A-3	GUIDE, MAGNET	384-064A	1
A-4	COVER, MAGNET	221-527A	1
A-5	COVER, CLAMP MAGNET	524-012A	1
B	TRAY, DISC AY	318-317A	1
B-1	TRAY, DISC	318-318A	1
B-2	SHAFT, LOADING	423-423A	1
B-3	GUIDE, SHAFT	384-384A	1
B-4	SCREW, SPECIAL	353S353D	1
C	BASE, AY	225-224B	1
C-1	GEAR, PULLEY	435-435A	1
C-2	GEAR, MIDDLE	435-436A	1
C-3	GEAR, LOADING	435-437A	1
C-4	BELT, COUNTER	451-145U	1
C-5	CAM AY, UP	374-374A	1
C-6	CAM AY, DOWN	374-375A	1
C-7	SPRING, COM	442-778A	1
C-8	WASHER, PLATE	354S354A	1
C-9	SCREW, WASHER	353S353B	1
C-10	SCREW, BIND	353S353C	3
C-11	RING-E	345S345A	2
C-12	SCREW, BIND MACHINE	353S353F	2
C-13	PLATE, SCALE AY	252-252A	1
C-13-1	PLATE, SCALE AY	252-253A	1
C-13-2	PIN PULLEY	356-356A	1
C-13-3	PIN MIDDLE	356-357A	1
C-13-4	BUSHING, PULLEY	341-341A	1
C-14	BASE, LOADING AY	225-225A	1
C-15	MOTOR AY	414-043A	1
C-15-1	PULLEY, MOTOR	432-432A	1
C-15-2	MOTOR (RF500TB-14415; MABUCHI)	414-044A	1
C-16	BASE, PU AY	225-228B	1
C-16-1	MECHA, AY (KSM-2101ABM, SONY)	411-045B	1
C-16-2	BASE, PU	225-229A	1
C-16-3	SPRING, ANTI-VIB.	442-717A	4
C-16-4	SCREW, WASHER	353S353A	4
C-16-5	SUPPORTER, SPRING AY	322-324A	4
C-16-5-1	SUPPORTER, SPRING	322-323A	4
C-16-5-2	RUBBER, ANTI-VIB.	477-106A	4
C-17	PWB AY	6870S-158AA	1
C-17-1	PWB, LOADING AY	6870S-159AA	1
C-17-2	S/W, SPECIAL (MSW18020MVJ0; MIC)	558-041A	2
C-17-3	CONNECTOR AY, WAFER(S5B-PH; JST)	563E010A	1

「REPLACEMENT PARTS LIST」　　　　PAGE : 1

MODEL : FJ-606　　BG1　　　SET PART NO : 113-606A　　　RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
			1TRL0302016	BRAIZER HEAD TA SCREW + 2 CUT	D 3.0 L 6.0 MSWR3/(BK)	
			213-606B	CABINET IS4031		
			221-527A	COVER	MAGNET (SECC 0.8T)	
			225-224B	BASE	ASS'Y	
			225-225A	BASE	LOADING ASS'Y	
			225-226A	BASE	LOADING (LEXAN 141,BK)	
			225-228B	BASE	P/U ASS'Y	
			225-229A	BASE	P/U (LUPOX GP2300,BK)	
			226-566A	DOOR	AY, CST-L (FJ-606L BG1)	
			226-567A	DOOR	AY, CST-R (FJ-606L BG1)	
			226-608A	DOOR	CD (FJ-606)	
			236-955A	WINDOW	CST-L (FJ-606)	
			236-956A	WINDOW	CST-R (FJ-606)	
			236-957A	WINDOW	FUNCTION (FJ-606)	
			236-958A	WINDOW	INNER FUNCTION (FJ-606)	
			236-959A	WINDOW	INNER COVER (FJ-606)	
			252-252A	PLATE SCALE	ASS'Y	
			252-253A	PLATE SCALE	LOADING (SECC 1.2T)	
			256-602A	SENSING PLATE ASSY		
			256-866A	PLATE	BOTTOM (FJ-606)	
			264-606A	LEG	DECO FOOT (F-606)	
			265-013A	FOOT	RUBBER (FFH-303)	
			265-606A	FOOT	FOOT FRONT(F-606)	
			3140S-0606A	CHASSIS	MAIN (FJ-606)	
			3140S-0607A	CHASSIS	CD FRAM (FJ-606)	
			3141SU0606A	CHASSIS ASSY	SUB,MAIN (FJ-606L BG1)	
			318-317A	TRAY	DISC ASSY	
			318-318A	TRAY	DISC (LUCKEY ABS XR-401,BK)	
			322-001D	SUPPORTER	SUPPORTER PWB DABS 12R	
			322-321B	SUPPORTER	CLAMP, ASS'Y	
			322-322B	SUPPORTER	CLAMP(GRAY)	
			322-323A	SUPPORTER	SPRING (LUPOX GP2300,BK)	
			322-324A	SUPPORTER	SPRING ASSY	
			324-308A	HOLDER	EJECT-L (FFH-303)	
			324-309A	HOLDER	EJECT-R (F-303)	
			324-606A	HOLDER	DECK MECH (FJ-606)	
			327-013A	CLAMP	DISC (DURACON M90-44,BK)	
			341-341A	BUSHING	PULLEY (C3604BD-F)	
			345S345A	RING	E (02)	
			353-025C	SCREW	SPECIAL 3X10 FBK	
			353-025K	SCREW	* SPECIAL 3X12 FZMY	
			353S353A	SCREW	WASHER (09X026L,FZMY)	
			353S353B	SCREW	WASHER (012X03X8L,FZMY)	
			353S353C	SCREW	+ BIND (03X8L,FBK)	
			353S353D	SCREW	SPECIAL (0.2X6L,FBK)	
			353S353E	SCREW	+ BIND (03X8L,FBK)	
			353S353F	SCREW	+BIND MACHINE (M2.6X4L,FBK)	
			354S354A	WASHER	PLATE (010X03.2X0.5T)	
			356-356A	PIN	PULLEY (SUS 303)	
			356-357A	PIN	MIDDLE (SUS 303)	

「REPLACEMENT PARTS LIST」　　　　PAGE : 2

MODEL : FJ-606　　BG1　　　SET PART NO : 113-606A　　　RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
			3720S-0606A	PANEL	FRONT (FJ-606)	
			3720S-0607A	PANEL	BACK (FJ-606)	
			3721S-0607A	PANEL ASSY	BACK (FJ-606L BG1)	
			3721SU0606A	PANEL ASSY	SUB, FRONT (FJ-606L BG1)	
			374-374A	CAM ASSY	UP (DURACON M90-44,BK)	
			374-375A	CAM ASSY	DOWN (DURACON M90-44,BK)	
			384-013A	GUIDE	ASSY EJECT-R	
			384-064A	GUIDE	MAGNET (EVA 1.5T,BK)	
			384-384A	GUIDE	SHAFT(DURACON M90-44,BK)	
			3890S-C029A	BOX	FJ-606L BG1	
			411-044B	MECHANISM ASSY	CDM-X201	
			411-045B	MECHANISM ASSY	KSM-2101ABM HI-FI,SONY	
			414-043A	MOTOR	MOTOR ASSY	
			414-044A	MOTOR	RF500TB-14415 (MABUCHI)	
			419-005H	DECK MECHANISM	CWA407-RR PB/REC ONE BODYF303	
			421-421A	SHAFT ASSY TUNING	BASE (SUS 303)	
			423-423A	SHAFT	LOADING (SUS420J2)	
			432-432A	PULLEY	MOTOR (DURACON M90-44,BK)	
			435-435A	GEAR	PULLEY (DURACON M90-44,BK)	
			435-436A	GEAR	MIDDLE (NYCON 12,BK)	
			435-437A	GEAR	LOADING (DURACON M90-44,BK)	
			442-085D	SPRING	SPRING (MINI10 BG1)	
			442-717A	SPRING	ANTI-VIB (SUS 304 WPB, 0.55)	
			442-778A	SPRING	COM (SUS 304PB,00.7)	
			444-115A	DAMPER	DAMPER AY (G332, BK)	
			451-145U	BELT	COUNTER (CR RUBBER)	
			472-190G	FELT	FELT (F-606)	
			477-106A	RUBBER	ANTI-VIB (IIR,RUBBER)	
			4810S-0206A	BRACKET	DECK FRAM (FJ-606)	
			4940S-0601A	KNOB	CD FUNCTION-5 (FJ-606)	
			4940S-0603A	KNOB	CD FUNCTION-4 (FJ-606)	
			4940S-0605A	KNOB	DUBBING/REC (FJ-606)	
			4940S-0606A	KNOB	DECK FUNCTION (FJ-606)	
			524-012A	COVER	CLAMP MAGNET (030X018X5T)	
			558-041A	SWITCH SPECIAL	MIC (MSW 18020 MVJ0)	
			563-703F	CONNECTOR ASSY	CGF1315-0101X2 2468#24 500SMK	
			563E010A	CONNECTOR ASSY	WAFER (JST S5B-PH(5P))	
			6871S-19DAA	PWB ASSY	CD/DECK/KEY/LED OF FJ-606	
			6871SA19DAA	PWB ASSY	DECK OF FJ-606	
			6871SB19DAA	PWB ASSY	DECK KEY OF FJ-606	
			6871SC19DAA	PWB ASSY	CD KEY/DECK LED OF FJ-606	
			6871SD19DAA	PWB ASSY	F-606 CDP MAIN	
			99P-3010		A'Y PINCH ARM L 22-093-4149	
			99P-3012		AY PINCH ARM R 22-093-4150	
			99P-3023		A'Y PULLEY FR 22-093-3060	
			99P-3024		BELT FR 02-083-4059	
			99P-3040		HALL IC 00-DN6851A	
			99P-3044		WIRE 16-072-4056	
			99P-3074	DECK PARTS	A'Y MOTOR 22-093-4193	
			99P-3076	DECK PARTS	A'Y HOLDER HEAD 22-093-4067	

「REPLACEMENT PARTS LIST」 PAGE : 3

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
			99P-3077	DECK PARTS	SOLENOID 07-W021C	
			99P-3079	DECK PARTS	BELT MAIN 02-083-4073	
			99P-3083	DECK PARTS	MAIN BELT 02-083-4072	
			99P-3084	DECK PARTS	A'Y HOLDER HEAD 22-093-4270	
		CN403	GDDF100J	WIRE	C,AY GSIL-G04/IL-J04(21)180(S)	
		CN404	L81=I35W	LEAD SET	FLAT UL2877 #24-9 350 W/K-K	
		CN801	563-801H	CONNECTOR ASSY	PHR-08/IL-S08 1571 #28 240	
		CN802	563-706B	CONNECTOR ASSY	JST PHR-08RD/51004-0810 250	
		CN803	563-801D	CONNECTOR ASSY	C,AY GSIL-S06X2 157/#28 250(S)	
		CN804	563-801G	CONNECTOR ASSY	GSIL-S05X2 1571 #28 240	
		C101	0CC4710K505	CAPACITOR CERAMIC(TEMP COMP)	470P 50V K SL TS	
		C104	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C105	0CQ1231N409	CAPACITOR POLYESTER(MYLAR)	0.012U 100V J POLY TP	
		C106	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C107	0CQ1031N409	CAPACITOR POLYESTER(MYLAR)	0.01U 100V J POLY TP	
		C108	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C109	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C111	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C113	0CQ2221N409	CAPACITOR POLYESTER(MYLAR)	0.0022U 100V J POLY TP	
		C114	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C116	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C118	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C120	0CE3356K618	CAPACITOR,ELECTROLYTIC	3.3M SMS 50V M FL TP(5)	
		C121	0CE6846K618	CAPACITOR,ELECTROLYTIC	0.68M SMS 50V M FL TP(5)	
		C122	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C123	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C124	0CQ1821N409	CAPACITOR POLYESTER(MYLAR)	0.0018U 100V J POLY TP	
		C126	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C148	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C150	0CC4710K505	CAPACITOR CERAMIC(TEMP COMP)	470P 50V K SL TS	
		C151	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C152	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C156	0CE3356K618	CAPACITOR,ELECTROLYTIC	3.3M SMS 50V M FL TP(5)	
		C157	0CC8210K505	CAPACITOR CERAMIC(TEMP COMP)	820P 50V K SL TS	
		C158	0CC1510K415	CAPACITOR,CERAMIC(TEMP COMP)	150P 50V J NPO TS	
		C161	0CC2210K405	CAPACITOR CERAMIC(TEMP COMP)	220P 50V J SL TP	
		C165	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C201	0CC4710K505	CAPACITOR CERAMIC(TEMP COMP)	470P 50V K SL TS	
		C204	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C205	0CQ1231N409	CAPACITOR POLYESTER(MYLAR)	0.012U 100V J POLY TP	
		C206	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C207	0CQ1031N409	CAPACITOR POLYESTER(MYLAR)	0.01U 100V J POLY TP	
		C208	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C210	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C213	0CQ2221N409	CAPACITOR POLYESTER(MYLAR)	0.0022U 100V J POLY TP	
		C214	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C215	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C216	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C217	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C219	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	

[REPLACEMENT PARTS LIST] PAGE : 4

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C220	0CE3356K618	CAPACITOR,ELECTROLYTIC	3.3M SMS 50V M FL TP(5)	
		C221	0CE6846K618	CAPACITOR,ELECTROLYTIC	0.68M SMS 50V M FL TP(5)	
		C222	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C223	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C224	0CQ1821N409	CAPACITOR POLYESTER(MYLAR)	0.0018U 100V J POLY TP	
		C226	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C227	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C228	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C230	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C248	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C249	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C250	0CC4710K505	CAPACITOR CERAMIC(TEMP COMP)	470P 50V K SL TS	
		C251	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C252	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C253	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C254	0CE4766F618	CAPACITOR,ELECTROLYTIC	47M SMS 16V M FL TP(5)	
		C255	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C256	0CE3356K618	CAPACITOR,ELECTROLYTIC	3.3M SMS 50V M FL TP(5)	
		C257	0CC8210K505	CAPACITOR CERAMIC(TEMP COMP)	820P 50V K SL TS	
		C258	0CC1510K415	CAPACITOR,CERAMIC(TEMP COMP)	150P 50V J NPO TS	
		C261	0CC2210K405	CAPACITOR CERAMIC(TEMP COMP)	220P 50V J SL TP	
		C262	0CE3366F618	CAPACITOR,ELECTROLYTIC	33M SMS 16V M FL TP(5)	
		C263	0CE3366F618	CAPACITOR,ELECTROLYTIC	33M SMS 16V M FL TP(5)	
		C264	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C265	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C267	0CE6846K618	CAPACITOR,ELECTROLYTIC	0.68M SMS 50V M FL TP(5)	
		C269	0CE3376J630	CAPACITOR,ELECTROLYTIC	330M SMS 35V M FM5	
		C270	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C271	0CK2230K945	CAPACITOR CERAMIC(HIGH DIELE)	0.022M 50V Z F TS	
		C272	0CE4766D618	CAPACITOR,ELECTROLYTIC	47M SMS 10V M FL TP(5)	
		C273	0CK2230K945	CAPACITOR CERAMIC(HIGH DIELE)	0.022M 50V Z F TS	
		C274	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C279	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C280	0CE4766F618	CAPACITOR,ELECTROLYTIC	47M SMS 16V M FL TP(5)	
		C281	0CQ1231N409	CAPACITOR POLYESTER(MYLAR)	0.012U 100V J POLY TP	
		C282	0CQ1231N409	CAPACITOR POLYESTER(MYLAR)	0.012U 100V J POLY TP	
		C283	0CQ2231N409	CAPACITOR POLYESTER(MYLAR)	0.022U 100V J POLY TP	
		C284	0CQ2231N409	CAPACITOR POLYESTER(MYLAR)	0.022U 100V J POLY TP	
		C285	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C286	0CQ2721N409	CAPACITOR POLYESTER(MYLAR)	0.0027M 100V J POLY TP	
		C287	0CQ1221R449	CAPACITOR POLYESTER(MYLAR)	1200P 250V J PYLN TP	
		C288	0CE3366F618	CAPACITOR,ELECTROLYTIC	33M SMS 16V M FL TP(5)	
		C401	0CE1046K618	CAPACITOR,ELECTROLYTIC	0.1M SMS 50V M FL TP(5)	
		C402	0CC3900K415	CAPACITOR CERAMIC(TEMP COMP)	39P 50V J NPO TP	
		C403	0CC3900K415	CAPACITOR CERAMIC(TEMP COMP)	39P 50V J NPO TP	
		C406	0CE4766D618	CAPACITOR,ELECTROLYTIC	47M SMS 10V M FL TP(5)	
		C801	0CE4766D618	CAPACITOR,ELECTROLYTIC	47M SMS 10V M FL TP(5)	
		C802	0CX8R20K518	CAPACITOR TUBULA(T.C)	8.2P 50V K NPO TA26	
		C803	0CQ2221N409	CAPACITOR POLYESTER(MYLAR)	0.0022U 100V J POLY TP	
		C804	0CQ3331N409	CAPACITOR POLYESTER(MYLAR)	0.033U 100V J POLY TP	

「REPLACEMENT PARTS LIST」 PAGE : 5

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C805	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C806	0CQ1031N409	CAPACITOR POLYESTER(MYLAR)	0.01U 100V J POLY TP	
		C807	0CQ3331N409	CAPACITOR POLYESTER(MYLAR)	0.033U 100V J POLY TP	
		C808	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C809	0CQ1031N409	CAPACITOR POLYESTER(MYLAR)	0.01U 100V J POLY TP	
		C810	0CN6820F668	CAPACITOR TUBULA(HIGH DIELE)	6800P 16V M X TA26	
		C811	0CX4R70K518	CAPACITOR TUBULA(T.C)	4.7P 50V K NPO TA26	
		C812	0CN2220F668	CAPACITOR TUBULA(HIGH DIELE)	2200P 16V M X TA26	
		C813	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C814	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C815	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C816	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C817	0CE2266D618	CAPACITOR,ELECTROLYTIC	22M SMS 10V M FM5 TP(5)	
		C818	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C819	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C820	0CQ1021N409	CAPACITOR POLYESTER(MYLAR)	0.001U 100V J POLY TP	
		C821	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C822	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C823	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C824	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C825	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C826	0CE4766D618	CAPACITOR,ELECTROLYTIC	47M SMS 10V M FL TP(5)	
		C827	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C828	0CQ3331N409	CAPACITOR POLYESTER(MYLAR)	0.033U 100V J POLY TP	
		C829	0CQ1031N409	CAPACITOR POLYESTER(MYLAR)	0.01U 100V J POLY TP	
		C830	0CE2266D618	CAPACITOR,ELECTROLYTIC	22M SMS 10V M FM5 TP(5)	
		C831	0CN1510K518	CAPACITOR TUBULA(HIGH DIELE)	150P 50V K B TA26	
		C832	0CQ6831N409	CAPACITOR POLYESTER(MYLAR)	0.068U 100V J POLY TP	
		C833	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C834	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C835	0CE4766D618	CAPACITOR,ELECTROLYTIC	47M SMS 10V M FL TP(5)	
		C836	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C837	0CE1066D618	CAPACITOR,ELECTROLYTIC	10M SMS 10V M FL TP(5)	
		C838	0CX4700K408	CAPACITOR TUBULA(T.C)	47P 50V J SL TA26	
		C839	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C840	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C841	0CE3376F618	CAPACITOR,ELECTROLYTIC	330M SMS 16V M FM5 TP5	
		C842	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C843	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C844	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C845	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C846	0CE1066D618	CAPACITOR,ELECTROLYTIC	10M SMS 10V M FL TP(5)	
		C847	0CE1066D618	CAPACITOR,ELECTROLYTIC	10M SMS 10V M FL TP(5)	
		C848	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C849	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C851	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C852	0CQ3331N409	CAPACITOR POLYESTER(MYLAR)	0.033U 100V J POLY TP	
		C855	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C856	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C857	0CC3000K415	CAPACITOR CERAMIC(TEMP COMP)	30P 50V J NPO TP	

[REPLACEMENT PARTS LIST] PAGE : 6

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C858	0CC3000K415	CAPACITOR CERAMIC(TEMP COMP)	30P 50V J NPO TP	
		C860	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C861	0CE3376F618	CAPACITOR,ELECTROLYTIC	330M SMS 16V M FM5 TP5	
		C862	0CE3376F618	CAPACITOR,ELECTROLYTIC	330M SMS 16V M FM5 TP5	
		C863	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C870	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C871	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C872	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C873	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C874	0CQ2221N409	CAPACITOR POLYESTER(MYLAR)	0.0022U 100V J POLY TP	
		C875	0CQ2221N409	CAPACITOR POLYESTER(MYLAR)	0.0022U 100V J POLY TP	
		C876	0CQ1021N409	CAPACITOR POLYESTER(MYLAR)	0.001U 100V J POLY TP	
		C877	0CQ1021N409	CAPACITOR POLYESTER(MYLAR)	0.001U 100V J POLY TP	
		C878	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C879	0CX2000K408	CAPACITOR TUBULA(T.C)	20P 50V J SL TA26	
		C880	0CX2000K408	CAPACITOR TUBULA(T.C)	20P 50V J SL TA26	
		C881	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C882	0CE1066F618	CAPACITOR,ELECTROLYTIC	10M SMS 16V M FM5 TP(5)	
		C883	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C884	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C885	0CQ8231N409	CAPACITOR POLYESTER(MYLAR)	0.082U 100V J POLY TP	
		C886	0CQ8231N409	CAPACITOR POLYESTER(MYLAR)	0.082U 100V J POLY TP	
		C887	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C888	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C890	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C894	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C895	0CN1040K948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.1UF 50V Z F TA26	
		C896	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C897	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		D101	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D102	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D201	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D202	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D260	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D261	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D262	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D263	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D264	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D271	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D272	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D279	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D280	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D281	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D401	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D402	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D406	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D407	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D411	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D412	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D413	0DD132009AA	DIODE	1SS132 DETECT,SW TP	

[REPLACEMENT PARTS LIST]

PAGE : 7

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		D414	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D801	0DD400209DA	DIODE	1N4002,RECT,ROHM,TP	
		D802	0DD400209DA	DIODE	1N4002,RECT,ROHM,TP	
		FB101	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB102	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB103	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB104	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB105	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB106	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		IC101	0ISA324600A	IC, SANYO	LA3246 PRE AMP P/B SANYO (S)	
		IC102	0IS0110100A	IC,SONY	CXA1101 DOLBY-B	
		IC103	0INE133000A	IC,NEC	UPC1330HA DECK R/P S/W,NEC	
		IC104	0IS0129800A	IC, SONY	CXA1298AP REC EQ	
		IC105	0ISG405200A	IC,SGS-THOMSON	HCF4052BEY 4CH ANALOG MUL,SGS	
		IC106	0IGS780500A	IC, GOLDSTAR ELECTRON	GL7805 REGULATOR	
		IC107	0IGS781200C	IC, GOLDSTAR ELECTRON	GL7812 12V 1A REGULATOR,G/S	
		IC401	0IT0471660C	IC,TOSHIBA	TMP47C1660N-V677MICOM,TOSHIBA	
		IC402	0IMT572009B	IC,MITSUMI	PST572E-2 TP 3.9V,MITSUMI	
		IC801	0IS0108100A	IC, SONY	CXA1081S RF AMP(CD) SONY (S)	
		IC802	0IS0108200B	IC, SONY	CX1082Q SERVO SP(CD) SONY	
		IC803	0IPH131100A	IC,PHILIPS	TDA1311 DAC(SOT97DE8),PHILIPS	
		IC804	0IKE455800A	IC, KEC	KIA4558P 8DIP LIN OP-AMP	
		IC805	0IS0116700A	IC, SONY	CXD1167Q DSP(CD)+RAM SONY	
		IC806	0IRH629600A	IC,ROHM	BA6296FP-T1 4CH DRIVER,ROHM/J	
		IC807	0IRH620900B	IC, ROHM	BA6209N MOTOR DRIVER	
		JK101	561-9040	CONNECTOR	WAFER,SMK CFG1115-0101	
		LD401	0DL340009AC	DIODE,LED	SLR-34GC 83F 215(GN) ROHM-K	
		LD402	0DL340009AC	DIODE,LED	SLR-34GC 83F 215(GN) ROHM-K	
		LD403	0DL340009AM	DIODE,LED	SLR-34DC 83F 215 TP ROHM	
		LD404	0DL340009AC	DIODE,LED	SLR-34GC 83F 215(GN) ROHM-K	
		LD405	0DL340009AM	DIODE,LED	SLR-34DC 83F 215 TP ROHM	
		LD406	0DL340009AM	DIODE,LED	SLR-34DC 83F 215 TP ROHM	
		LPF101	637-008D	INDUCTOR	105KHZ TRAP 8RBC TOKO CAPCORE	
		LPF103	637-008D	INDUCTOR	105KHZ TRAP 8RBC TOKO CAPCORE	
		LPF201	637-008D	INDUCTOR	105KHZ TRAP 8RBC TOKO CAPCORE	
		LPF203	637-008D	INDUCTOR	105KHZ TRAP 8RBC TOKO CAPCORE	
		L280	634-610C	COIL OSCILLATOR	OSC TAPE 10(4.7MH)	
		PN101	561S715C	CONNECTOR	WAFER,GIL-G-3P-S3T2-ES	
		ZD802	0DZ330009AG	DIODE,ZENER	MTZ3.3B-T-77 ROHM-K	
		ZD804	0DZ510009GA	DIODE ZENER	UZ-5.1BSB(TP-B),5.1V,UNIZON	
		PN102	561S715H	CONNECTOR	WAFER,GIL-G-8P-S3T2-ES	
		PN401	561-645K	CONNECTOR	CNNECTOR MX 52004-1110 P=1.5	
		PN402	561-645M	CONNECTOR	MX52004-1310 P=1.5 WIRE TRAP	
		PN403	561S715D	CONNECTOR	WAFER,GIL-G-4P-S3T2-ES	
		PN404	561-646I	CONNECTOR	CONNECTOR MLX 520110910,09PIN	
		PN801	561-711H	CONNECTOR	*WAFER,G/S GIL-S-08P-S2T2-EF	
		PN802	561-685H	CONNECTOR	WAFER,KOREA MOLEX 53014-0810	
		PN803	561-711F	CONNECTOR	*WAFER,G/S GIL-S-06P-S2T2-EF	
		PN804	561-711E	CONNECTOR	*WAFER,G/S GIL-S-05P-S2T2-EF	
		Q100	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	

「REPLACEMENT PARTS LIST」 PAGE : 8

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		Q101	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q102	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q104	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q112	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	
		Q200	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	
		Q201	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q202	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q204	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q205	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q206	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q207	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q208	0TR320509AB	TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
		Q209	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q210	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q211	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q212	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	
		Q213	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q214	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q215	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q280	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q281	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q283	0TR320509AB	TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
		Q284	0TR320509AB	TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
		Q285	0TR320509AB	TRANSISTOR	KTC3205-TP-Y (KTC2236A)KEC	
		Q401	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q402	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q404	0TR126609AA	TRANSISTOR	KTA1266-TP-Y (KTA1015) KEC	
		Q405	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q406	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q407	0TR127309AA	TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
		Q411	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q412	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q413	0TR127309AA	TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
		Q414	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q415	0TR114009AE	TRANSISTOR	DTC114TS-TP S/W ROHM	
		Q416	0TR127309AA	TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
		Q450	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q451	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q452	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q453	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q454	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q455	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q801	0TR126609AB	TRANSISTOR	KTA1266-GR TP,KEC(KTA1015GR)	
		Q802	0TR110009AE	TRANSISTOR	KRC110M TP,KEC(KRC1210)	
		Q804	0TR110009AE	TRANSISTOR	KRC110M TP,KEC(KRC1210)	
		Q807	0TR127309AA	TRANSISTOR	KTA1273-TP-Y (KTA966A)KEC	
		Q808	0TR103009AF	TRANSISTOR	KRA103M TP,KEC(KRA2203)	
		Q812	0TR103009AE	TRANSISTOR	KRC103M TP,KEC(KRC1203)	
		Q813	0TR880000AF	TRANSISTOR	KTD880A-O (KTD880) KEC	
		Q814	0TR126609AB	TRANSISTOR	KTA1266-GR TP,KEC(KTA1015GR)	

[REPLACEMENT PARTS LIST]

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		Q815	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		R100	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R101	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R102	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R103	0RD1500F608	RESISTOR,FIXED CARBON FILM	150 1/6W 5 TA26	
		R105	0RD1102F608	RESISTOR,FIXED CARBON FILM	11K 1/6W 5% TA26	
		R106	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R107	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R108	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R109	0RD1801F608	RESISTOR,FIXED CARBON FILM	1.8K 1/6W 5 TA26	
		R110	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R115	0RD1201G608	RESISTOR,FIXED CARBON FILM	1.2K 1/4W 5 TA26	
		R116	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R117	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R118	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R121	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R122	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R125	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R126	0RD2701F608	RESISTOR,FIXED CARBON FILM	2.7K 1/6W 5 TA26	
		R127	0RD1801F608	RESISTOR,FIXED CARBON FILM	1.8K 1/6W 5 TA26	
		R128	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R129	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R130	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R150	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R155	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R156	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R169	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R172	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R200	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R201	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R202	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R203	0RD1500F608	RESISTOR,FIXED CARBON FILM	150 1/6W 5 TA26	
		R205	0RD1102F608	RESISTOR,FIXED CARBON FILM	11K 1/6W 5% TA26	
		R206	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R207	0RD1003G608	RESISTOR,FIXED CARBON FILM	100K 1/4W 5 TA26	
		R208	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R209	0RD1801F608	RESISTOR,FIXED CARBON FILM	1.8K 1/6W 5 TA26	
		R210	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R211	0RD3902F608	RESISTOR,FIXED CARBON FILM	39K 1/6W 5 TA26	
		R212	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R213	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R216	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R218	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R220	0RD2700G608	RESISTOR,FIXED CARBON FILM	270 1/4W 5 TA26	
		R222	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R225	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R226	0RD2701F608	RESISTOR,FIXED CARBON FILM	2.7K 1/6W 5 TA26	
		R227	0RD1801F608	RESISTOR,FIXED CARBON FILM	1.8K 1/6W 5 TA26	
		R228	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R229	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	

「REPLACEMENT PARTS LIST」 PAGE : 10

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R230	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R231	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R232	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R249	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R250	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R251	0RD1004F608	RESISTOR,FIXED CARBON FILM	1.0M 1/6W 5 TA26	
		R252	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R253	0RD2402F608	RESISTOR,FIXED CARBON FILM	24K 1/6W 5 TA26	
		R254	0RD4700G608	RESISTOR,FIXED CARBON FILM	470 1/4W 5 TA26	
		R255	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R256	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R257	0RD1003G608	RESISTOR,FIXED CARBON FILM	100K 1/4W 5 TA26	
		R258	0RD3902F608	RESISTOR,FIXED CARBON FILM	39K 1/6W 5 TA26	
		R259	0RD3901F608	RESISTOR,FIXED CARBON FILM	3.9K 1/6W 5 TA26	
		R260	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R261	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R262	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R263	0RD2701F608	RESISTOR,FIXED CARBON FILM	2.7K 1/6W 5 TA26	
		R264	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R265	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R266	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R267	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R268	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R269	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R270	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R272	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R279	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R280	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R282	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R283	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R284	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R285	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R290	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R291	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R292	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R293	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R294	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R295	0RD2700G608	RESISTOR,FIXED CARBON FILM	270 1/4W 5 TA26	
		R296	0RD4700G608	RESISTOR,FIXED CARBON FILM	470 1/4W 5 TA26	
		R297	0RD2701G608	RESISTOR,FIXED CARBON FILM	2.7K 1/4W 5 TA26	
		R298	0RD1004F608	RESISTOR,FIXED CARBON FILM	1.0M 1/6W 5 TA26	
		R299	0RD2202G608	RESISTOR,FIXED CARBON FILM	22K 1/4W 5 TA26	
		R401	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R402	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R403	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R404	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R405	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R406	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R407	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R408	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	

[REPLACEMENT PARTS LIST]

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R409	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R410	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R411	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R412	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R413	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R414	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R415	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R416	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R417	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R418	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R419	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R420	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R421	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R423	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R425	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R427	0RD6801F608	RESISTOR,FIXED CARBON FILM	6.8K 1/6W 5 TA26	
		R428	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R429	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R432	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R433	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R434	0RD4701G608	RESISTOR,FIXED CARBON FILM	4.7K 1/4W 5 TA26	
		R435	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R436	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R437	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R438	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R439	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R440	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R441	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R442	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R443	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R450	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	
		R451	0RD8200F608	RESISTOR,FIXED CARBON FILM	820 1/6W 5 TA26	
		R452	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R453	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R454	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R455	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	
		R456	0RD8200F608	RESISTOR,FIXED CARBON FILM	820 1/6W 5 TA26	
		R457	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R458	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R459	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R460	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R461	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	
		R462	0RD8200F608	RESISTOR,FIXED CARBON FILM	820 1/6W 5 TA26	
		R463	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R464	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R465	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R466	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R467	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R468	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R470	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	

「REPLACEMENT PARTS LIST」 P A G E : 12

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R472	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R473	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R474	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R475	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R476	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R477	0RD3300F608	RESISTOR,FIXED CARBON FILM	330 1/6W 5 TA26	
		R479	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R480	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R481	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R482	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R483	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R484	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R801	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R802	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R803	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R804	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R805	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R806	0RD4703F608	RESISTOR,FIXED CARBON FILM	470K 1/6W 5 TA26	
		R807	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R808	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R809	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R810	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R811	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R812	0RD1802F608	RESISTOR,FIXED CARBON FILM	18K 1/6W 5 TA26	
		R813	0RD1503F608	RESISTOR,FIXED CARBON FILM	150K 1/6W 5 TA26	
		R814	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R815	0RD8202F608	RESISTOR,FIXED CARBON FILM	82K 1/6W 5 TA26	
		R816	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R817	0RD5103F608	RESISTOR,FIXED CARBON FILM	510K 1/6W 5 TA26	
		R818	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R819	0RN3321F408	RESISTOR,FIX METAL FILM	3.32K 1/6W 1 TA26	
		R820	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R821	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R822	0RD3302F608	RESISTOR,FIXED CARBON FILM	33K 1/6W 5 TA26	
		R823	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R824	0RN1003G608	RESISTOR FIX METAL FILM	100K 1/4W 5 TA26	
		R825	0RN1003F608	RESISTOR FIX METAL FILM	100K 1/6W 5 TA26	
		R826	0RD0822F608	RESISTOR,FIXED CARBON FILM	82 1/6W 5 TA26	
		R827	0RD0222F608	RESISTOR,FIXED CARBON FILM	22 1/6W 5 TA26	
		R828	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R829	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R830	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R832	0RD3901F608	RESISTOR,FIXED CARBON FILM	3.9K 1/6W 5 TA26	
		R833	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R834	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R836	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R838	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R839	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R840	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R841	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	

「REPLACEMENT PARTS LIST」 PAGE : 13

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R842	ORD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R843	ORD2200G608	RESISTOR,FIXED CARBON FILM	220 1/4W 5 TA26	
		R844	ORD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R845	ORD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R846	ORD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R851	ORD1004F608	RESISTOR,FIXED CARBON FILM	1.0M 1/6W 5 TA26	
		R852	ORD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R853	ORD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R855	ORD6801F608	RESISTOR,FIXED CARBON FILM	6.8K 1/6W 5 TA26	
		R856	ORD2200G608	RESISTOR,FIXED CARBON FILM	220 1/4W 5 TA26	
		R862	ORD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R863	ORD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R864	ORD1000F608	RESISTOR,FIXED CARBON FILM	100 1/6W 5 TA26	
		R865	ORD1000F608	RESISTOR,FIXED CARBON FILM	100 1/6W 5 TA26	
		R866	ORD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R868	ORD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R871	ORD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R872	ORD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R873	ORD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R874	ORD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R875	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R876	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R877	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R878	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R879	ORD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R880	ORD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R881	ORD5600F608	RESISTOR,FIXED CARBON FILM	560 1/6W 5 TA26	
		R882	ORD5600F608	RESISTOR,FIXED CARBON FILM	560 1/6W 5 TA26	
		R883	ORD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R884	ORD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R885	ORD1800F608	RESISTOR,FIXED CARBON FILM	180 1/6W 5 TA26	
		R886	ORD1800F608	RESISTOR,FIXED CARBON FILM	180 1/6W 5 TA26	
		R887	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R888	ORD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R889	ORD4700F608	RESISTOR,FIXED CARBON FILM	470 1/6W 5 TA26	
		R890	ORD4700F608	RESISTOR,FIXED CARBON FILM	470 1/6W 5 TA26	
		R891	ORD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		SW401	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW402	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW403	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW404	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW405	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW406	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW407	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW408	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW409	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW410	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW411	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW412	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW413	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	

「REPLACEMENT PARTS LIST」 P A G E : 14

MODEL : FJ-606 BG1 SET PART NO : 113-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		SW414	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW415	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW416	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW417	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW418	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW419	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW420	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW421	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW422	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW424	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		TP101	561S715C	CONNECTOR	WAFER,GIL-G-3P-S3T2-ES	
		VR101	613-008J	RESISTOR SEMI-FIXED	EVN-D8AA02 BE5(22KB) (S)	
		VR102	613-008J	RESISTOR SEMI-FIXED	EVN-D8AA02 BE5(22KB) (S)	
		VR103	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR104	613S008F	RESISTOR SEMI-FIXED	EVA-D8N A02 B15 (100KB) STICK	
		VR201	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR202	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR203	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR204	613S008F	RESISTOR SEMI-FIXED	EVA-D8N A02 B15 (100KB) STICK	
		VR403	613-008A	RESISTOR SEMI-FIXED	EVN-D8A A02,BQ3(4.7KB) (S)	
		VR404	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		VR801	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR802	613S008D	RESISTOR SEMI-FIXED	EVN-D8N A02 B14 (10KB) STICK	
		VR804	613S008J	RESISTOR SEMI-FIXED	EVA-D8N A02 BE4 (22KB) STICK	
		VR805	613S008B	RESISTOR SEMI-FIXED	EVN-D8N A02 B13 (1KB) STICK	
		X401	616-020P	FILTER CERAMIC	CSA6.00MGU MURATA	
		X801	617T605M	CRYSTAL	8.4672MHZ HYOSUNG	
		ZD401	0DZ620009EA	DIODE,ZENER	MTZ6.2-B T-77 6.2V TP,ROHM/K	
		ZD801	0DZ750009CA	DIODE ZENER	UZ7.5BM,0.5W,UNIZON,TP	
				*** END OF DATA ***		

STEREO RECEIVER

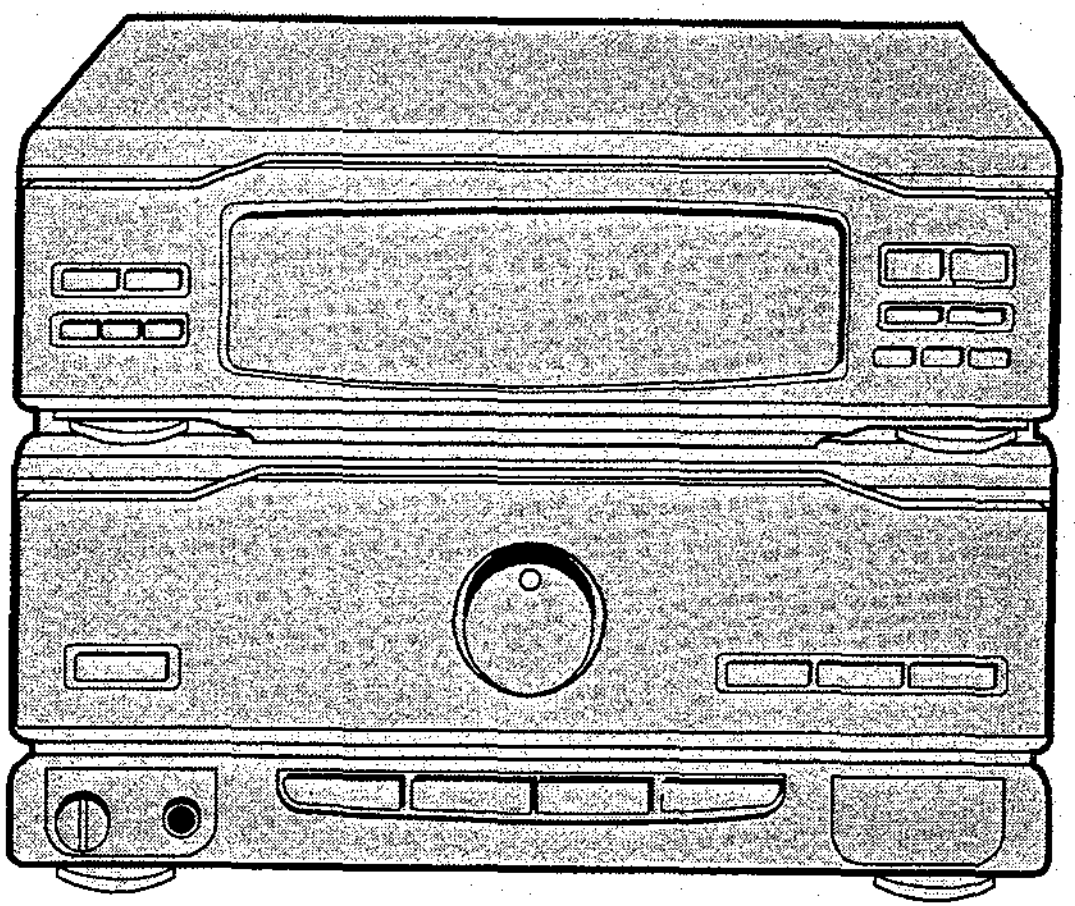

MODEL : FR-606L

SPECIFICATIONS

1. AMP SECTION

Output Power (6Ω, 2 ch, T.H.D. 10%)	30W+30W
T.H.D.	0.05%
Frequency Response (3dB Down)	20Hz~30kHz
Signal-to-noise Ratio	90dB
Input Impedance	47kΩ
Input Sensitivity (AUX/Phono)	200mV/5mV
Cross Talk 100Hz/1kHz/10kHz	50dB/50dB/40dB

2. TUNER SECTION

1) FM

Frequency Range	87.5MHz~108MHz
Intermediate Frequency	10.7MHz
30dB Usable Sensitivity 90.1MHz, 98.1MHz, 106.1MHz	10dB
Signal-to-noise Ratio (Mono/Stereo)	65dB/63dB
Image Rejection 106.1MHz	45dB
IF Rejection 90.1MHz	80dB
Distortion 98.1MHz	0.5%
Frequency Response (-3dB)	40Hz~14kHz
Stereo Separation 100Hz/1kHz/10kHz	35dB/35dB/30dB

2) MW

Frequency Range	522kHz~1611kHz
Intermediate Frequency	450kHz
Usable Sensitivity 603kHz, 1008kHz, 1404kHz	55dB
Image Rejection 1404kHz	35dB
IF Rejection 603kHz	40dB
Selectivity 1008kHz	35dB
Signal-to-noise Ratio 1008kHz	35dB
Distortion	1.5%
Frequency Response (-6dB)	80Hz~2300Hz

3) LW

Frequency Range	153kHz~281kHz
Intermediate Frequency	450kHz
Usable Sensitivity 164kHz, 200kHz, 254kHz	63dB
Image Rejection	30dB
Selectivity 200kHz	35dB
Signal-to-noise Ratio 200kHz	35dB
Distortion	1.5%
Frequency Response (-6dB)	80Hz~2300Hz

3. GENERAL

Power Requirement	AC 230V, 50Hz
Dimension (W×H×D)	203×270×300(mm)
Weight (Net)	6.4kg

NOTE : Specifications are subject to change without notice in the course of product improvement.

ADJUSTMENTS

This set has been aligned at the factory and normally will not require further adjustment. As a result, it is not recommended that any attempt is made to modificate any circuit. If any parts are replaced or if anyone tampers with the adjustment, realignment may be necessary.

IMPORTANT

1. Check power-source voltage.
2. Set the function switch to band being aligned.
3. Turn volume control to minimum unless otherwise noted.
4. Keep the signal input as low as possible to avoid AGC and AFC action.

TEST & ADJUSTMENT POINT

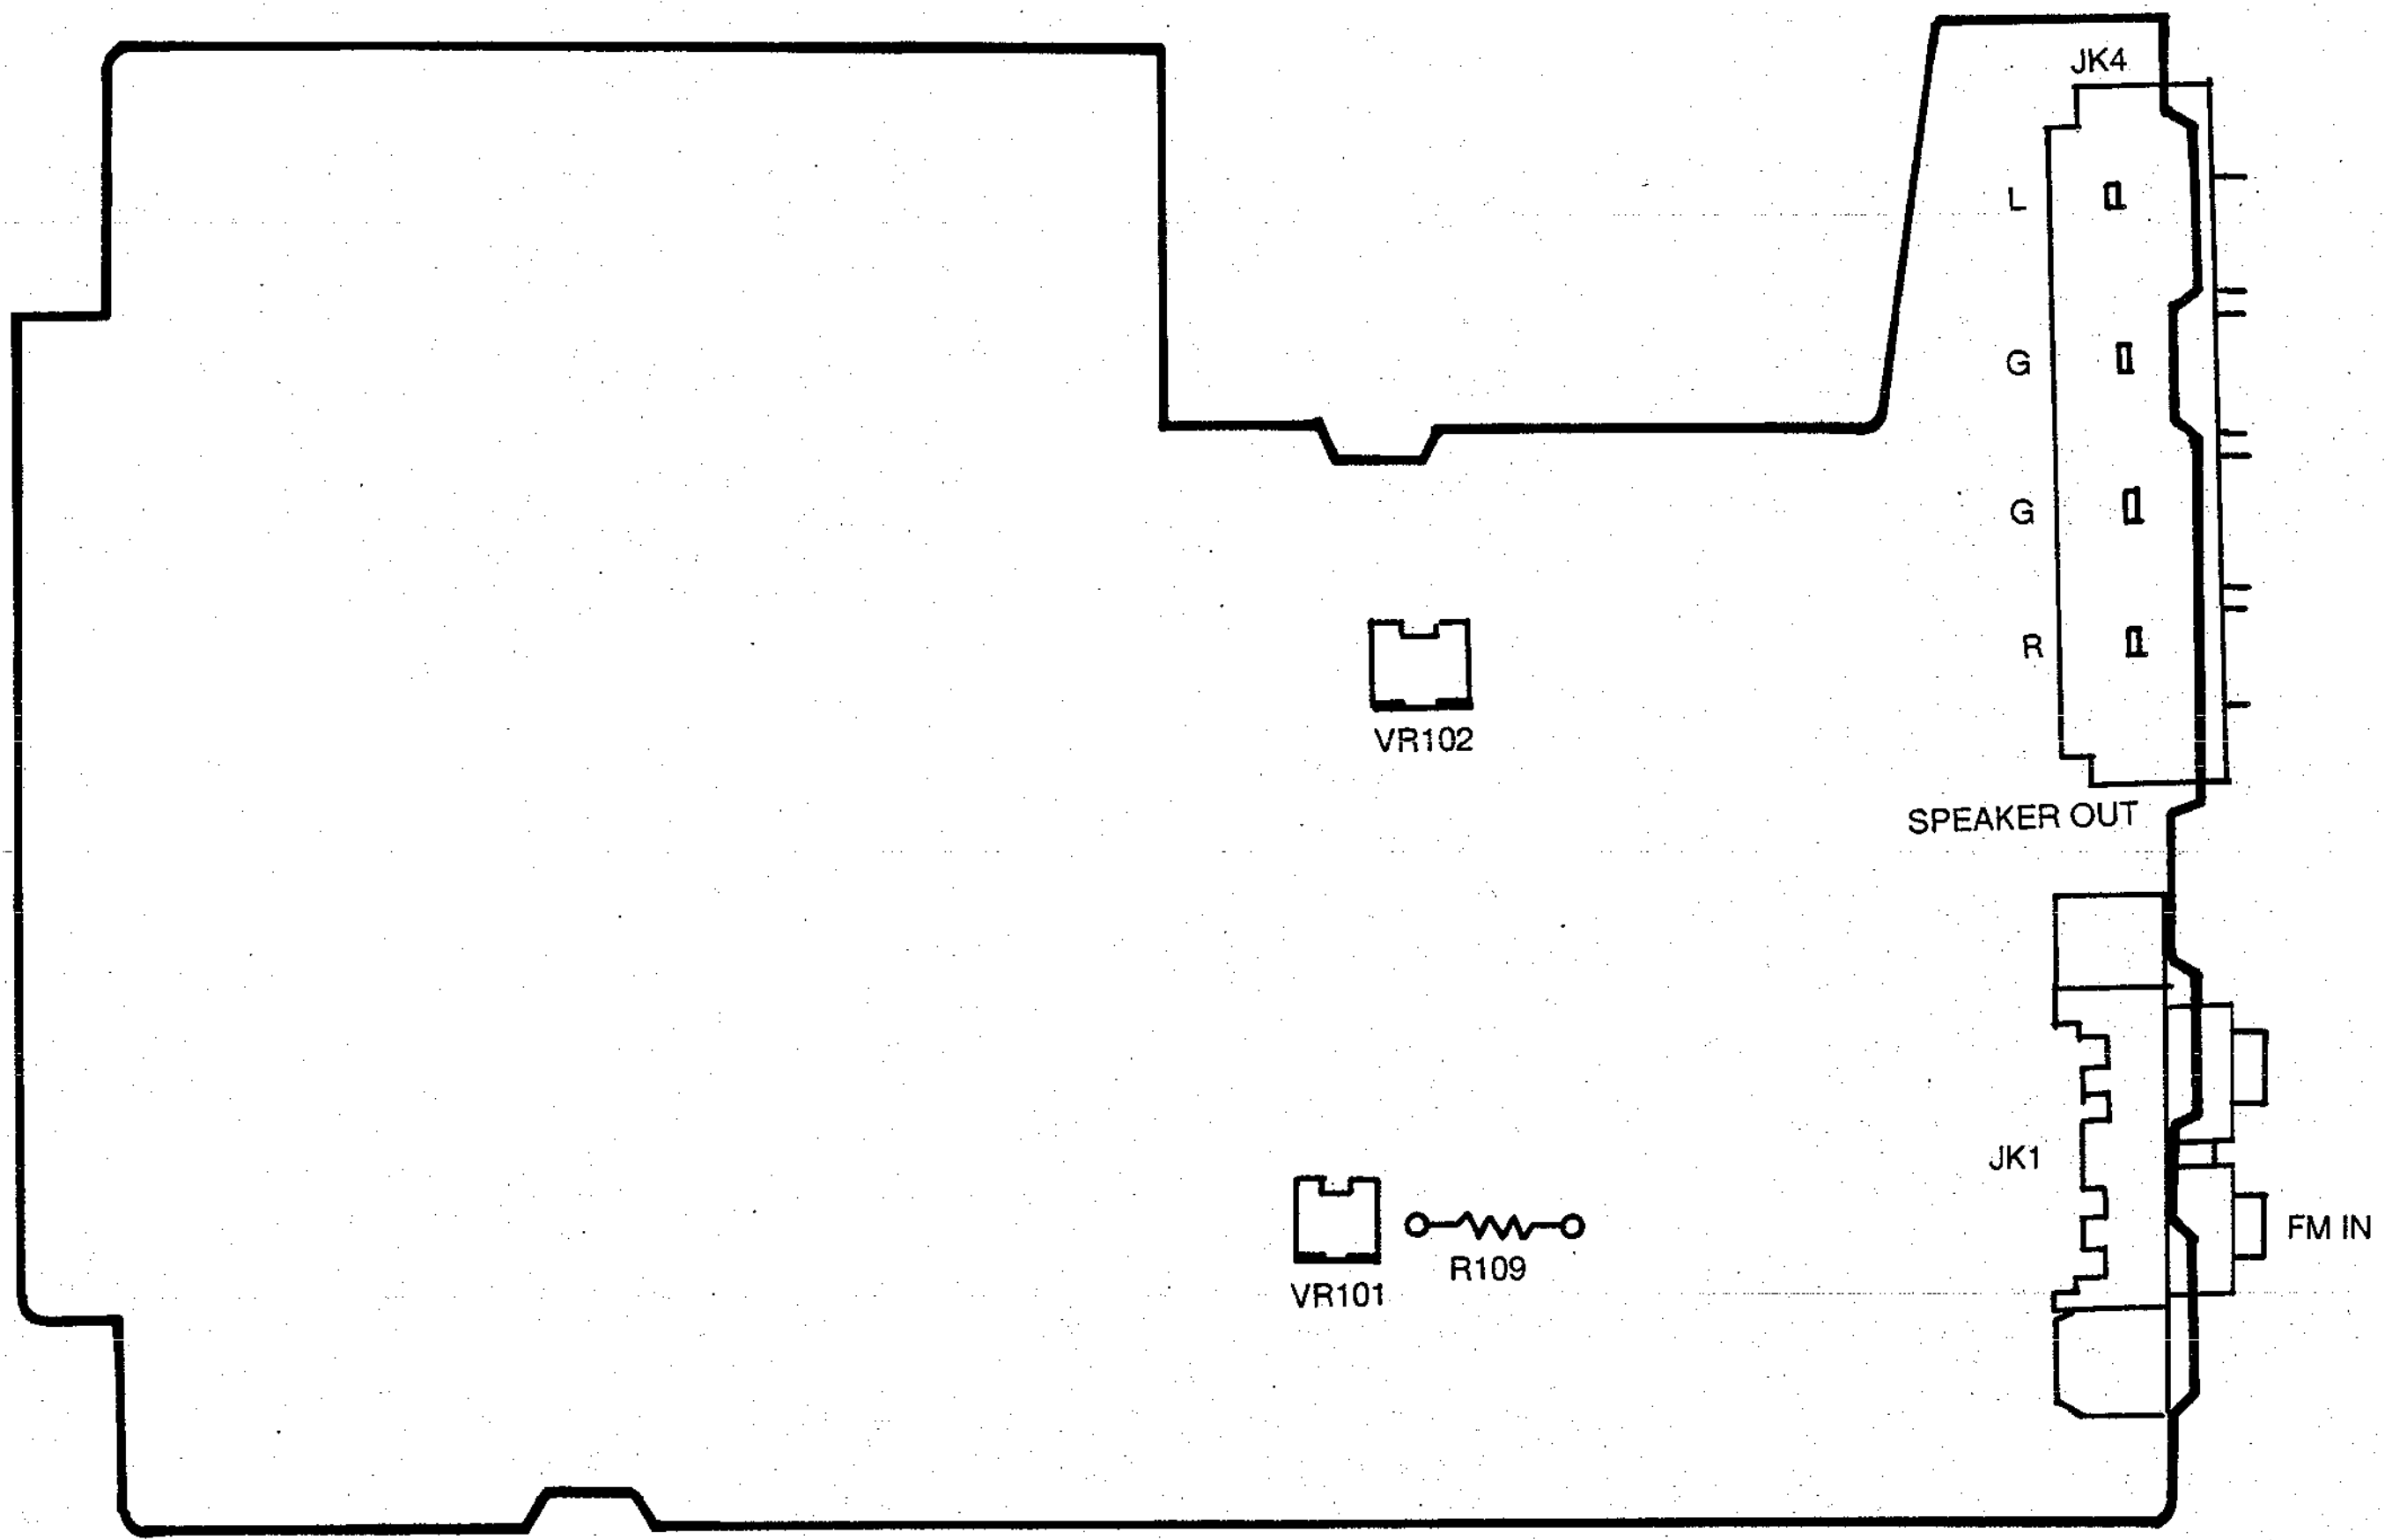

Figure 8. MAIN P.C.BOARD

1. FM IF ADJUSTMENT

1) As The Distortion Meter Is Not Used

DC Voltmeter ....Connect to both side of the R109.

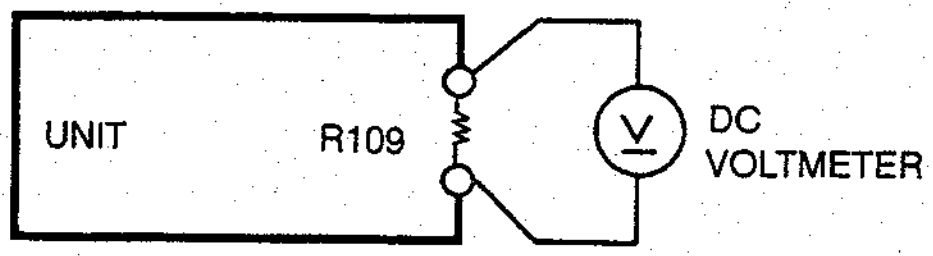

Figure 9. FM IF Adjustment Connection Diagram

Step	Frequency	Adjust for	Adjustment
1	98MHz	DC 0V±300mV	L106
2	Repeat step 1 several times.		

2) As The Distortion Meter Is Used

Signal Generator	Connect to FM Antenna Terminal through the dummy. (Adjust for the output of the generator to be 60dB at this time.)
VTVM	Connect to the speaker terminal. (Adjust for the indication of the VTVM to be 2V with volume.)
Distortion Meter	Connect to the speaker terminal. (Rotate the L106 until the distortion meter is less than 0.4%.)

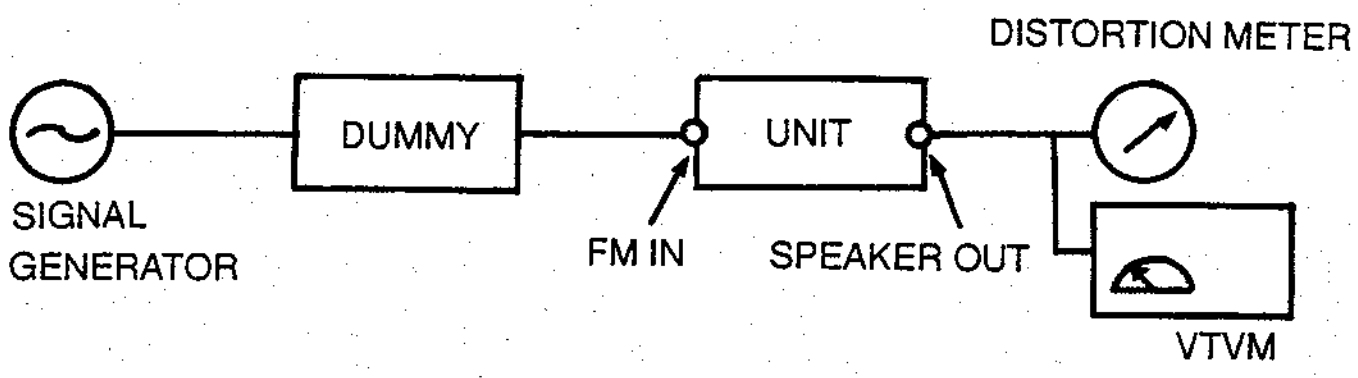
DISTORTION METER
DUMMY
UNIT
SIGNAL GENERATOR
FM IN
SPEAKER OUT
VTVM

Figure 10. FM IF Adjustment Connection Diagram

Frequency	Adjust for	Adjustment
98MHz	Minimum T.H.D.	L106

2. FM MPX ADJUSTMENT-SEPARATION

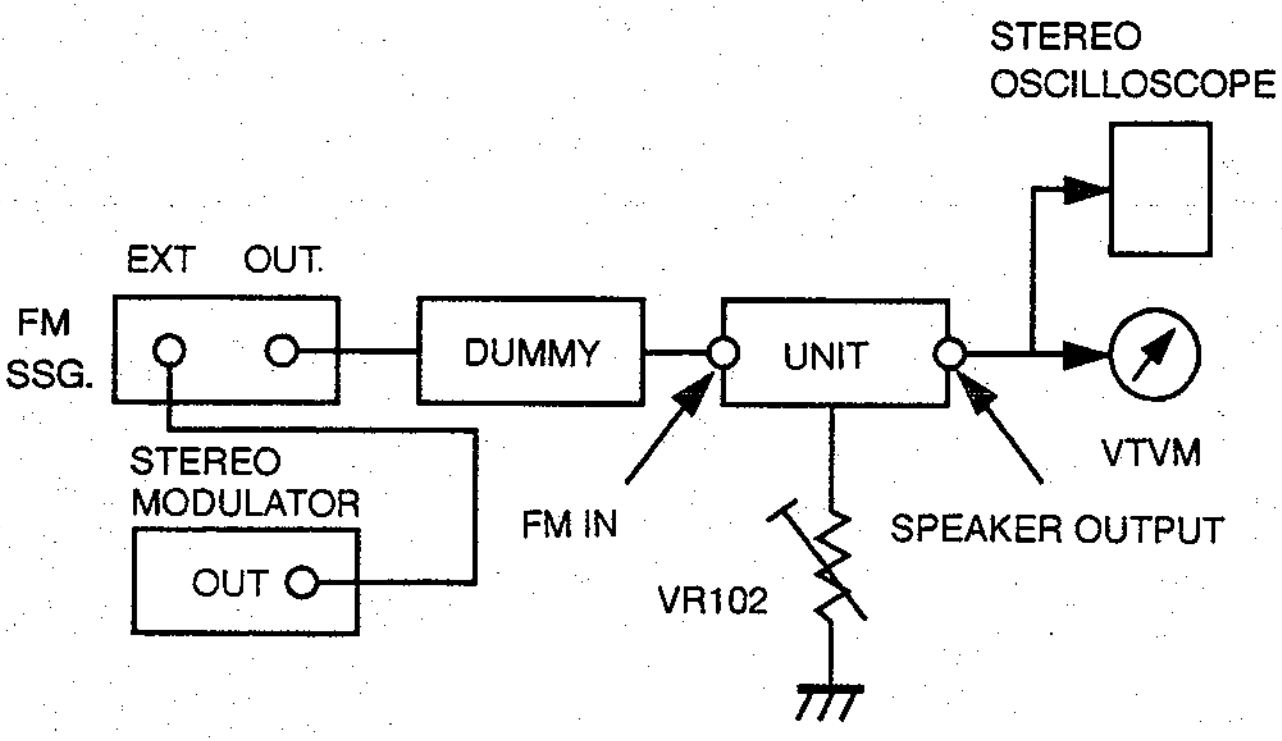
STEREO OSCILLOSCOPE
EXT
OUT.
FM SSG.
DUMMY
UNIT
VTVM
STEREO MODULATOR
OUT
FM IN
SPEAKER OUTPUT
VR102

Figure 11. FM MPX Adjustment Connection Diagram

Pilot Signal	Adjust for	Adjustment
ON	Difference of R and L must be maximum.	VR102

NOTE : In case of adjusting the stereo separation, if input is L (or R) channel, R (or L) channel must be maximum.

3. FM STEREO BEACON SENSITIVITY ADJUSTMENT

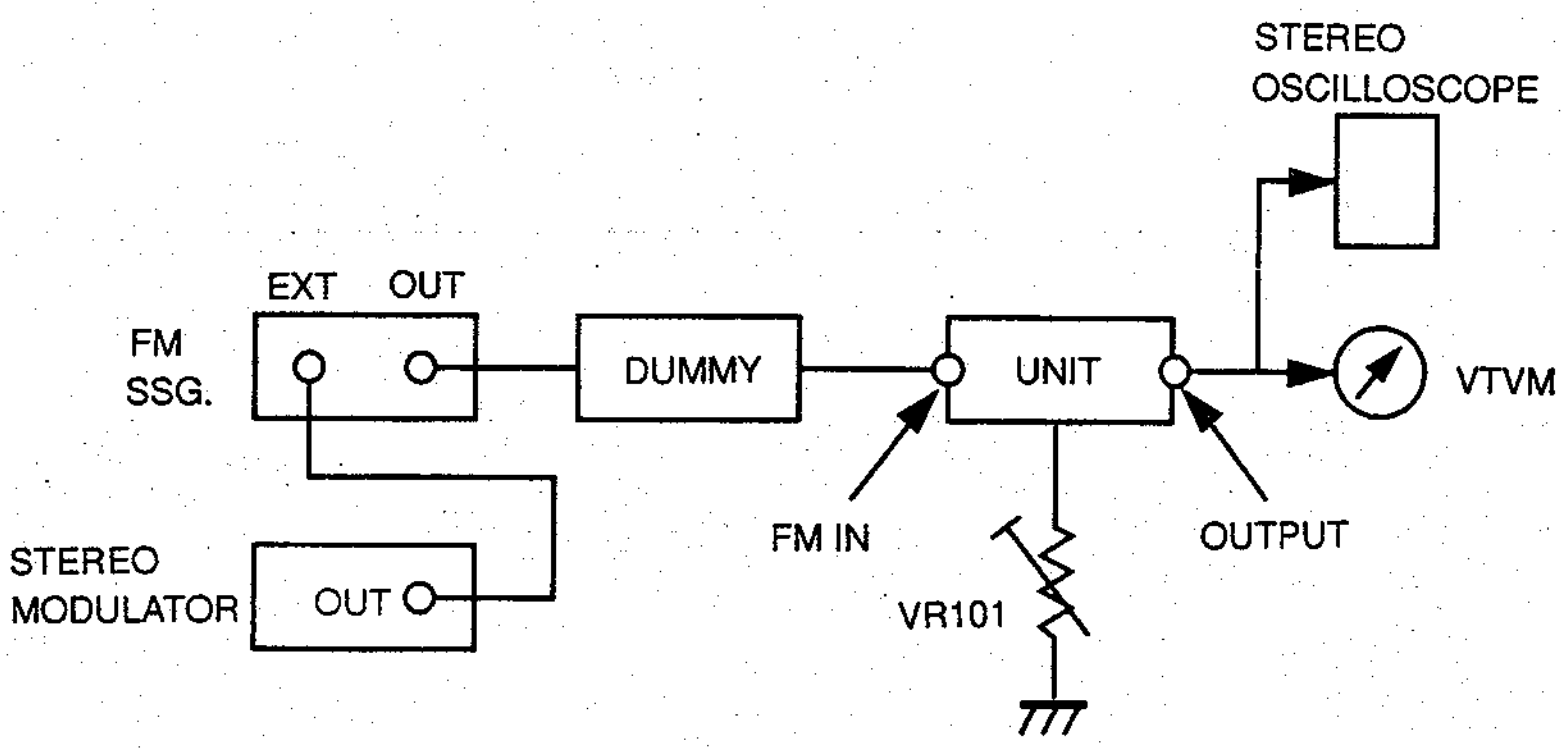
STEREO OSCILLOSCOPE
EXT
OUT
FM SSG.
DUMMY
UNIT
VTVM
STEREO MODULATOR
OUT
FM IN
OUTPUT
VR101

Figure 12. FM Stereo Beacon Sensitivity Adjustment Connection Diagram

Pilot Signal	Test Point	Adjust For	Adjustment
ON	Pilot Display (on FIP)	25dB±5dB	VR101

BLOCK DIAGRAM

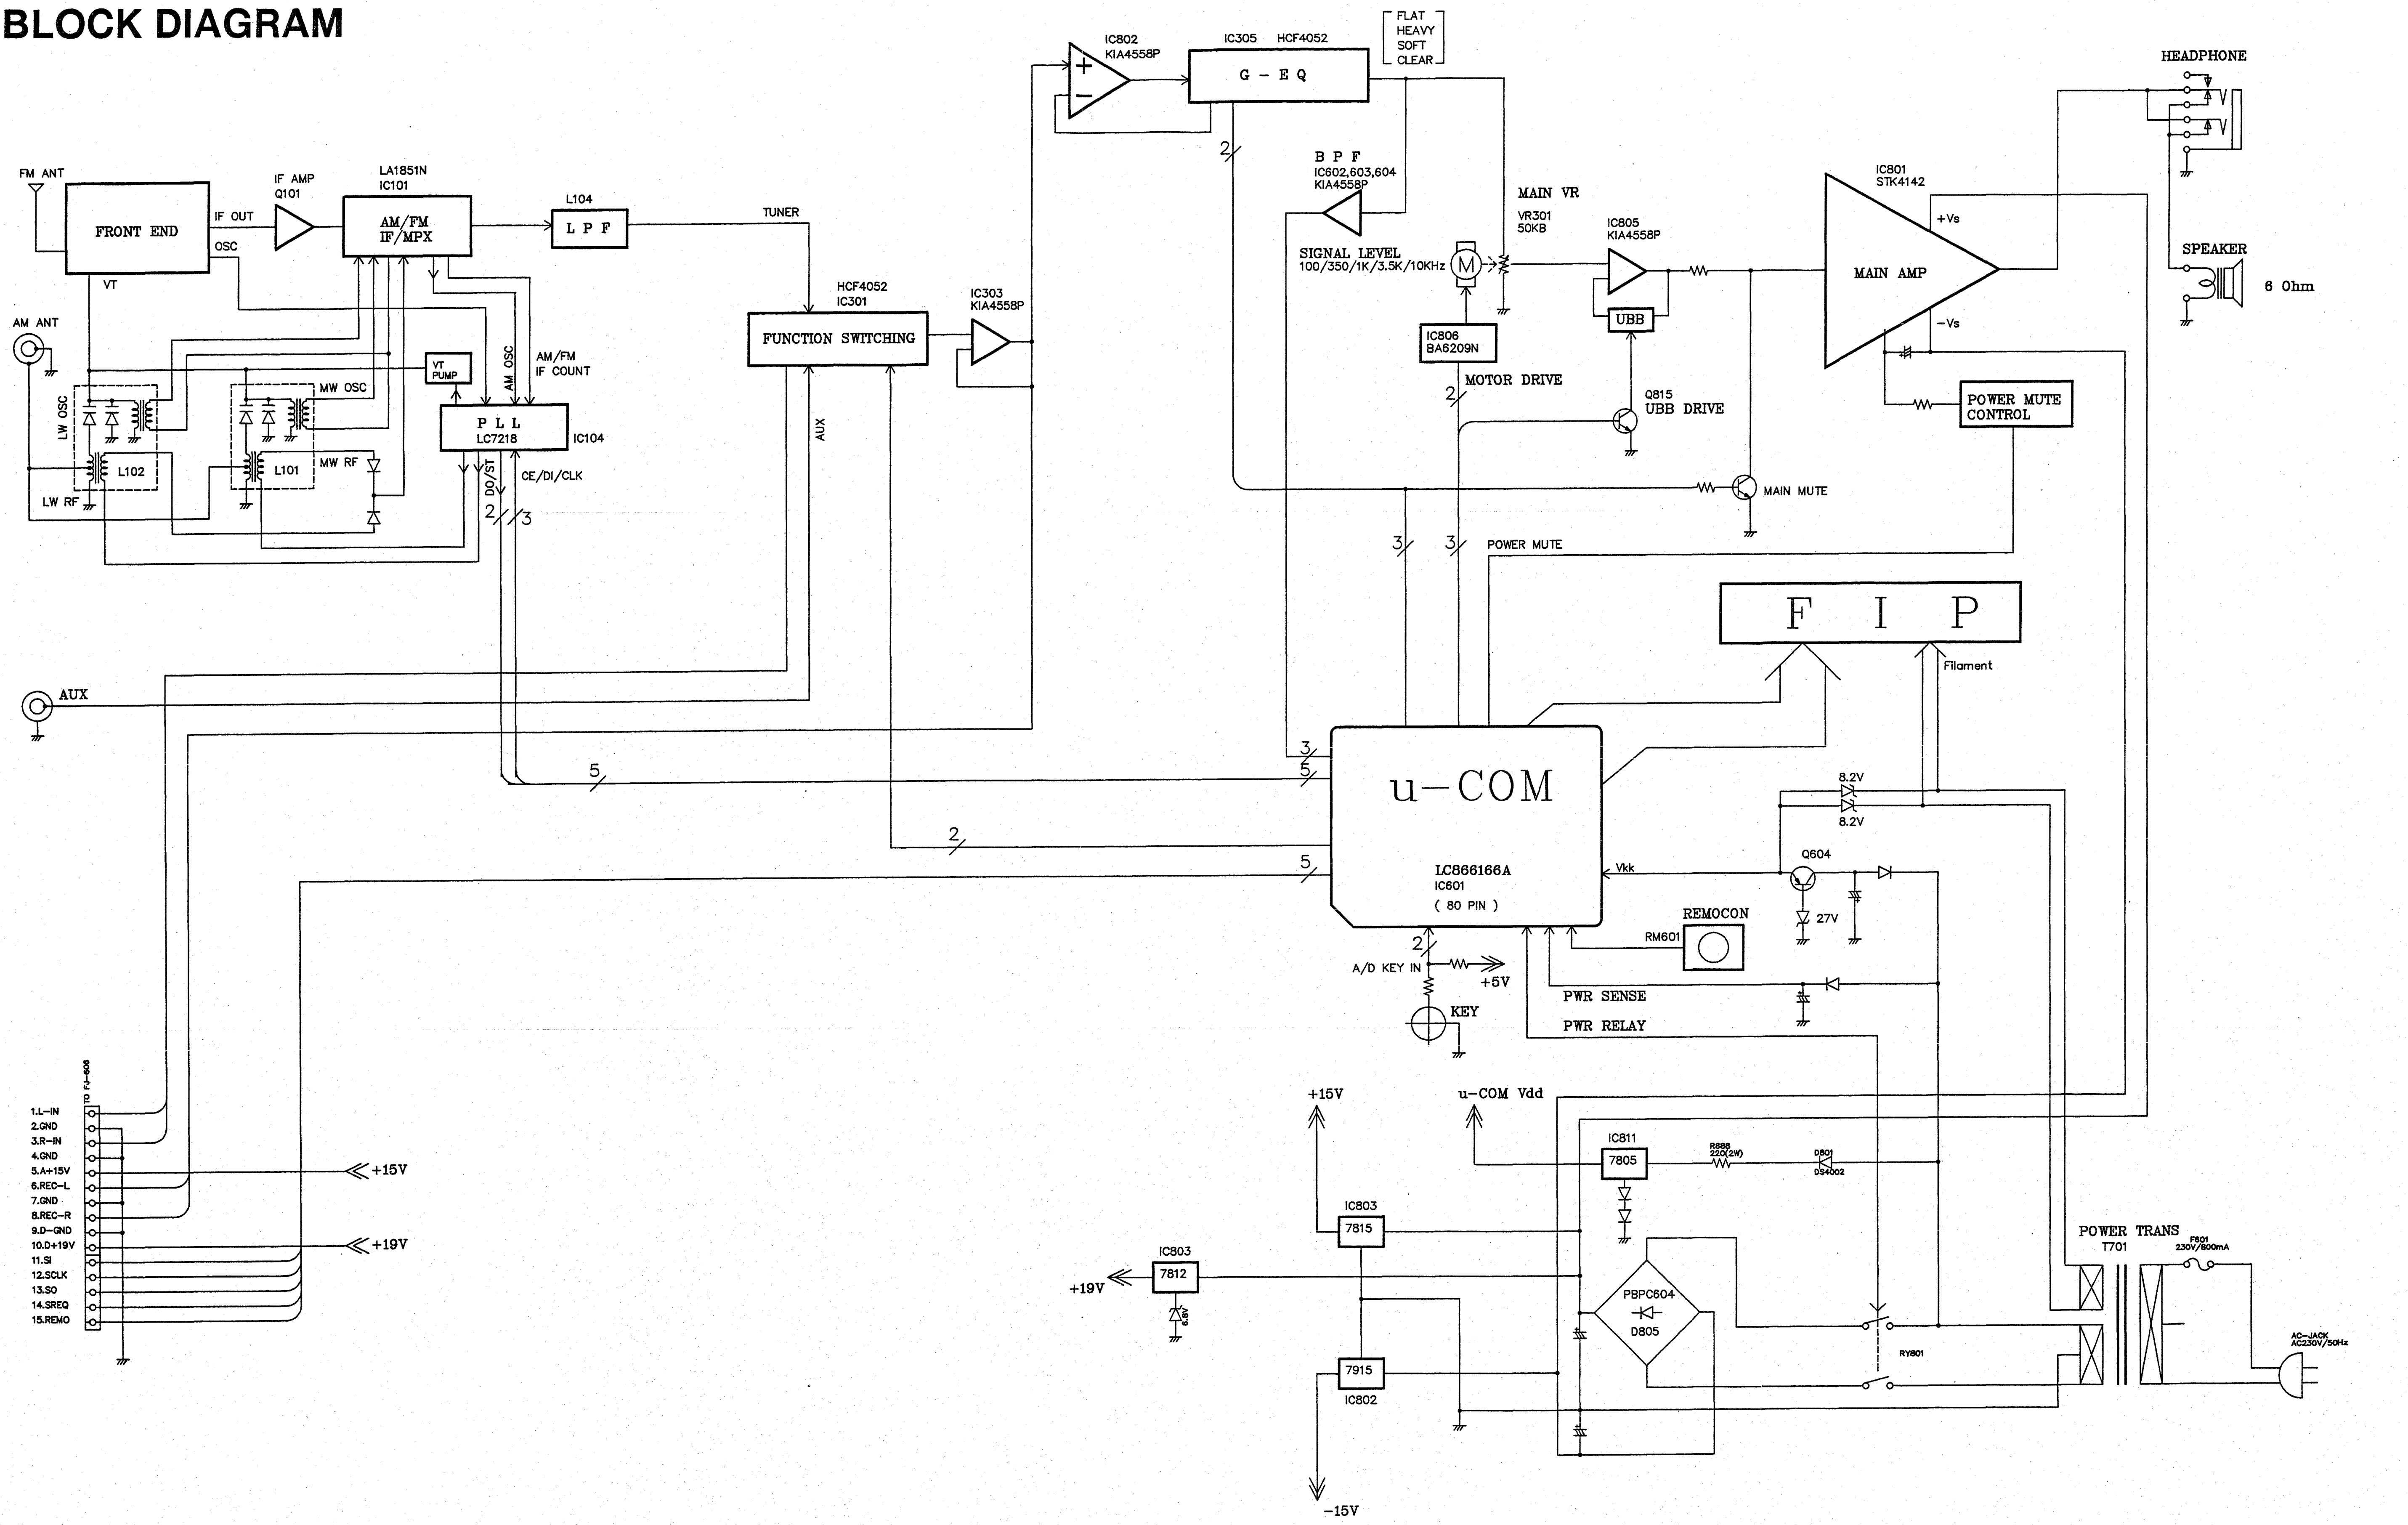
FM ANT
FRONT END
IF OUT
OSC
VT
IF AMP
Q101
LA1851N
IC101
AM/FM
IF/MPX
L104
L P F
TUNER
AM ANT
LW OSC
L102
LW RF
MW OSC
L101
MW RF
VT PUMP
AM OSC
AM/FM
IF COUNT
P L L
LC7218
IC104
DO/ST
CE/DI/CLK
2
3
HCF4052
IC301
FUNCTION SWITCHING
AUX
IC303
KIA4558P
IC802
KIA4558P
IC305 HCF4052
G - E Q
FLAT
HEAVY
SOFT
CLEAR
B P F
IC602,603,604
KIA4558P
SIGNAL LEVEL
100/350/1K/3.5K/10KHz
MAIN VR
VR301
50KB
IC806
BA6209N
MOTOR DRIVE
IC805
KIA4558P
UBB
Q815
UBB DRIVE
MAIN MUTE
IC801
STK4142
+Vs
-Vs
MAIN AMP
POWER MUTE
CONTROL
POWER MUTE
HEADPHONE
SPEAKER
6 Ohm
F I P
Filament
u-COM
LC866166A
IC601
(80 PIN)
5
8.2V
8.2V
Vkk
Q604
27V
REMOCON
RM601
A/D KEY IN
+5V
KEY
PWR SENSE
PWR RELAY
TO FJ-606
1.L-IN
2.GND
3.R-IN
4.GND
5.A+15V
6.REC-L
7.GND
8.REC-R
9.D-GND
10.D+19V
11.SI
12.SCLK
13.SO
14.SREQ
15.REMO
+15V
+19V
+15V
u-COM Vdd
IC811
7805
R888
220(2W)
D801
DS4002
IC803
7815
IC803
7812
6.8V
+19V
7915
IC802
-15V
PBPC604
D805
RY801
POWER TRANS
T701
F801
230V/800mA
AC-JACK
AC230V/50Hz

● MAIN CIRCUIT

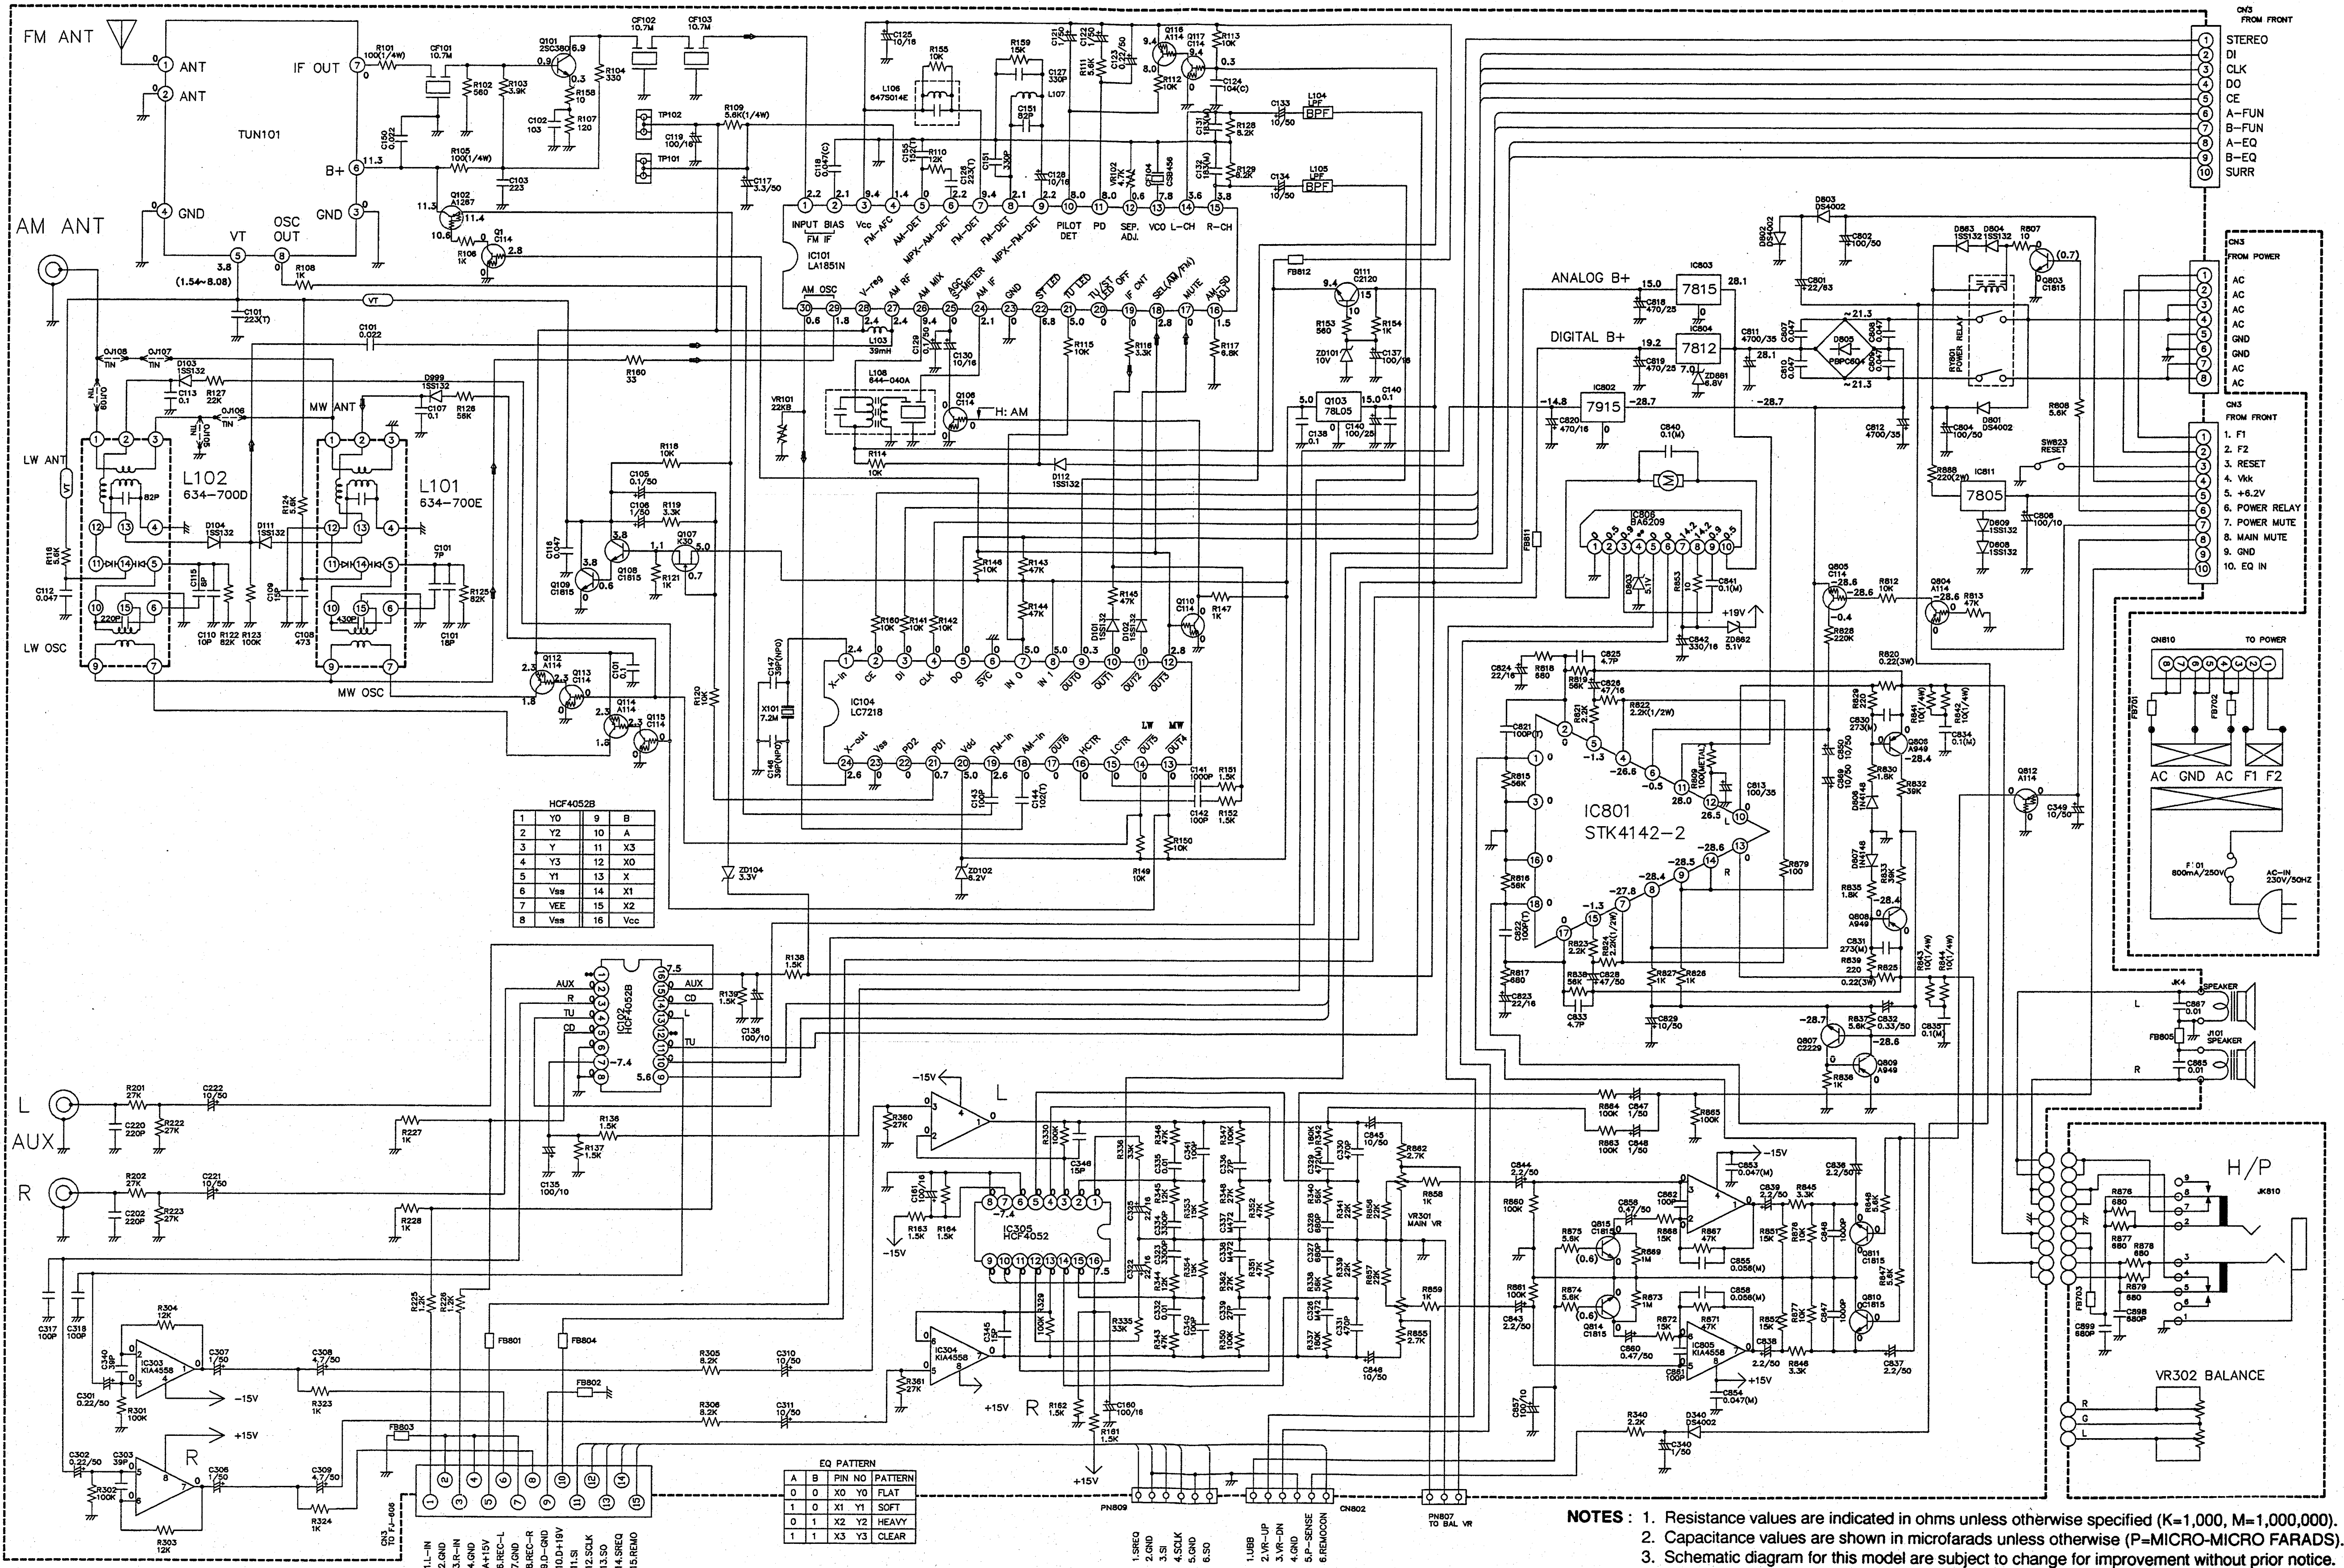
FM ANT
ANT
TUN101
IF OUT
B+
GND
VT
OSC OUT
AM ANT
LW ANT
L102
634-700D
L101
634-700E
MW ANT
LW OSC
MW OSC
IC101
LA1851N
INPUT BIAS FM IF
Vcc
FM-AFC
AM-DET
MPX-AM-DET
FM-DET
MPX-FM-DET
PILOT DET
PD
SEP. ADJ.
VCO
L-CH
R-CH
AM OSC
V-reg
AM RF
AM MIX
AGC
S-METER
AM IF
GND
ST LED
TU LED
TU LED OFF
IF CNT
SEL(AM/FM)
MUTE
AM-SD
H: AM
IC104
LC7218
X101
7.2M
IC102
HCF4052B
AUX
R
TU
CD
L
ANALOG B+
DIGITAL B+
IC803
7815
IC804
7812
IC802
7915
Q103
78L05
IC808
BA6209
IC811
7805
IC801
STK4142-2
POWER RELAY
CN3
FROM FRONT
STEREO
DI
CLK
DO
CE
A-FUN
B-FUN
A-EQ
B-EQ
SURR
CN3
FROM POWER
AC
AC
AC
AC
GND
GND
AC
AC
CN3
FROM FRONT
1. F1
2. F2
3. RESET
4. Vkk
5. +6.2V
6. POWER RELAY
7. POWER MUTE
8. MAIN MUTE
9. GND
10. EQ IN
CN810
TO POWER
AC GND AC F1 F2
F101
800mA/250V
AC-IN
230V/50HZ
JK4
SPEAKER
J101
SPEAKER
H/P
JK810
VR302 BALANCE
IC305
HCF4052
VR301
MAIN VR
IC303
KIA4558
IC304
KIA4558
IC805
KIA4558
-15V
+15V
CN3
TO FJ-606
1.L-IN
2.GND
3.R-IN
4.GND
A+15V
6.REC-L
7.GND
8.REC-R
9.D-GND
10.D+19V
11.SI
12.SCLK
13.SO
14.SREQ
15.REMO
PN809
1.SREQ
2.GND
3.SI
4.SCLK
5.GND
6.SO
CN802
1.UBB
2.VR-UP
3.VR-DN
4.GND
5.F-SENSE
6.REMOCON
PN807
TO BAL VR

HCF4052B

1	Y0	9	B
2	Y2	10	A
3	Y	11	X3
4	Y3	12	X0
5	Y1	13	X
6	Vss	14	X1
7	VEE	15	X2
8	Vss	16	Vcc

EQ PATTERN

A	B	PIN NO	PATTERN
0	0	X0 Y0	FLAT
1	0	X1 Y1	SOFT
0	1	X2 Y2	HEAVY
1	1	X3 Y3	CLEAR

NOTES :
1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise (P=MICRO-MICRO FARADS).
3. Schematic diagram for this model are subject to change for improvement without prior notice.

>> VOLTAGE CHECK CONDITON <<

1. FUNCTION: (1) AUX
(2) FM(TUNER) -- at TUNER part voltage.
- 98.0MHz
- STEREO, AUTO

2. EQ.: FLAT, VR: MINIMUM

3. NOTE: () -- Active state voltage.
** -- High impedence stste.

● FRONT CIRCUIT

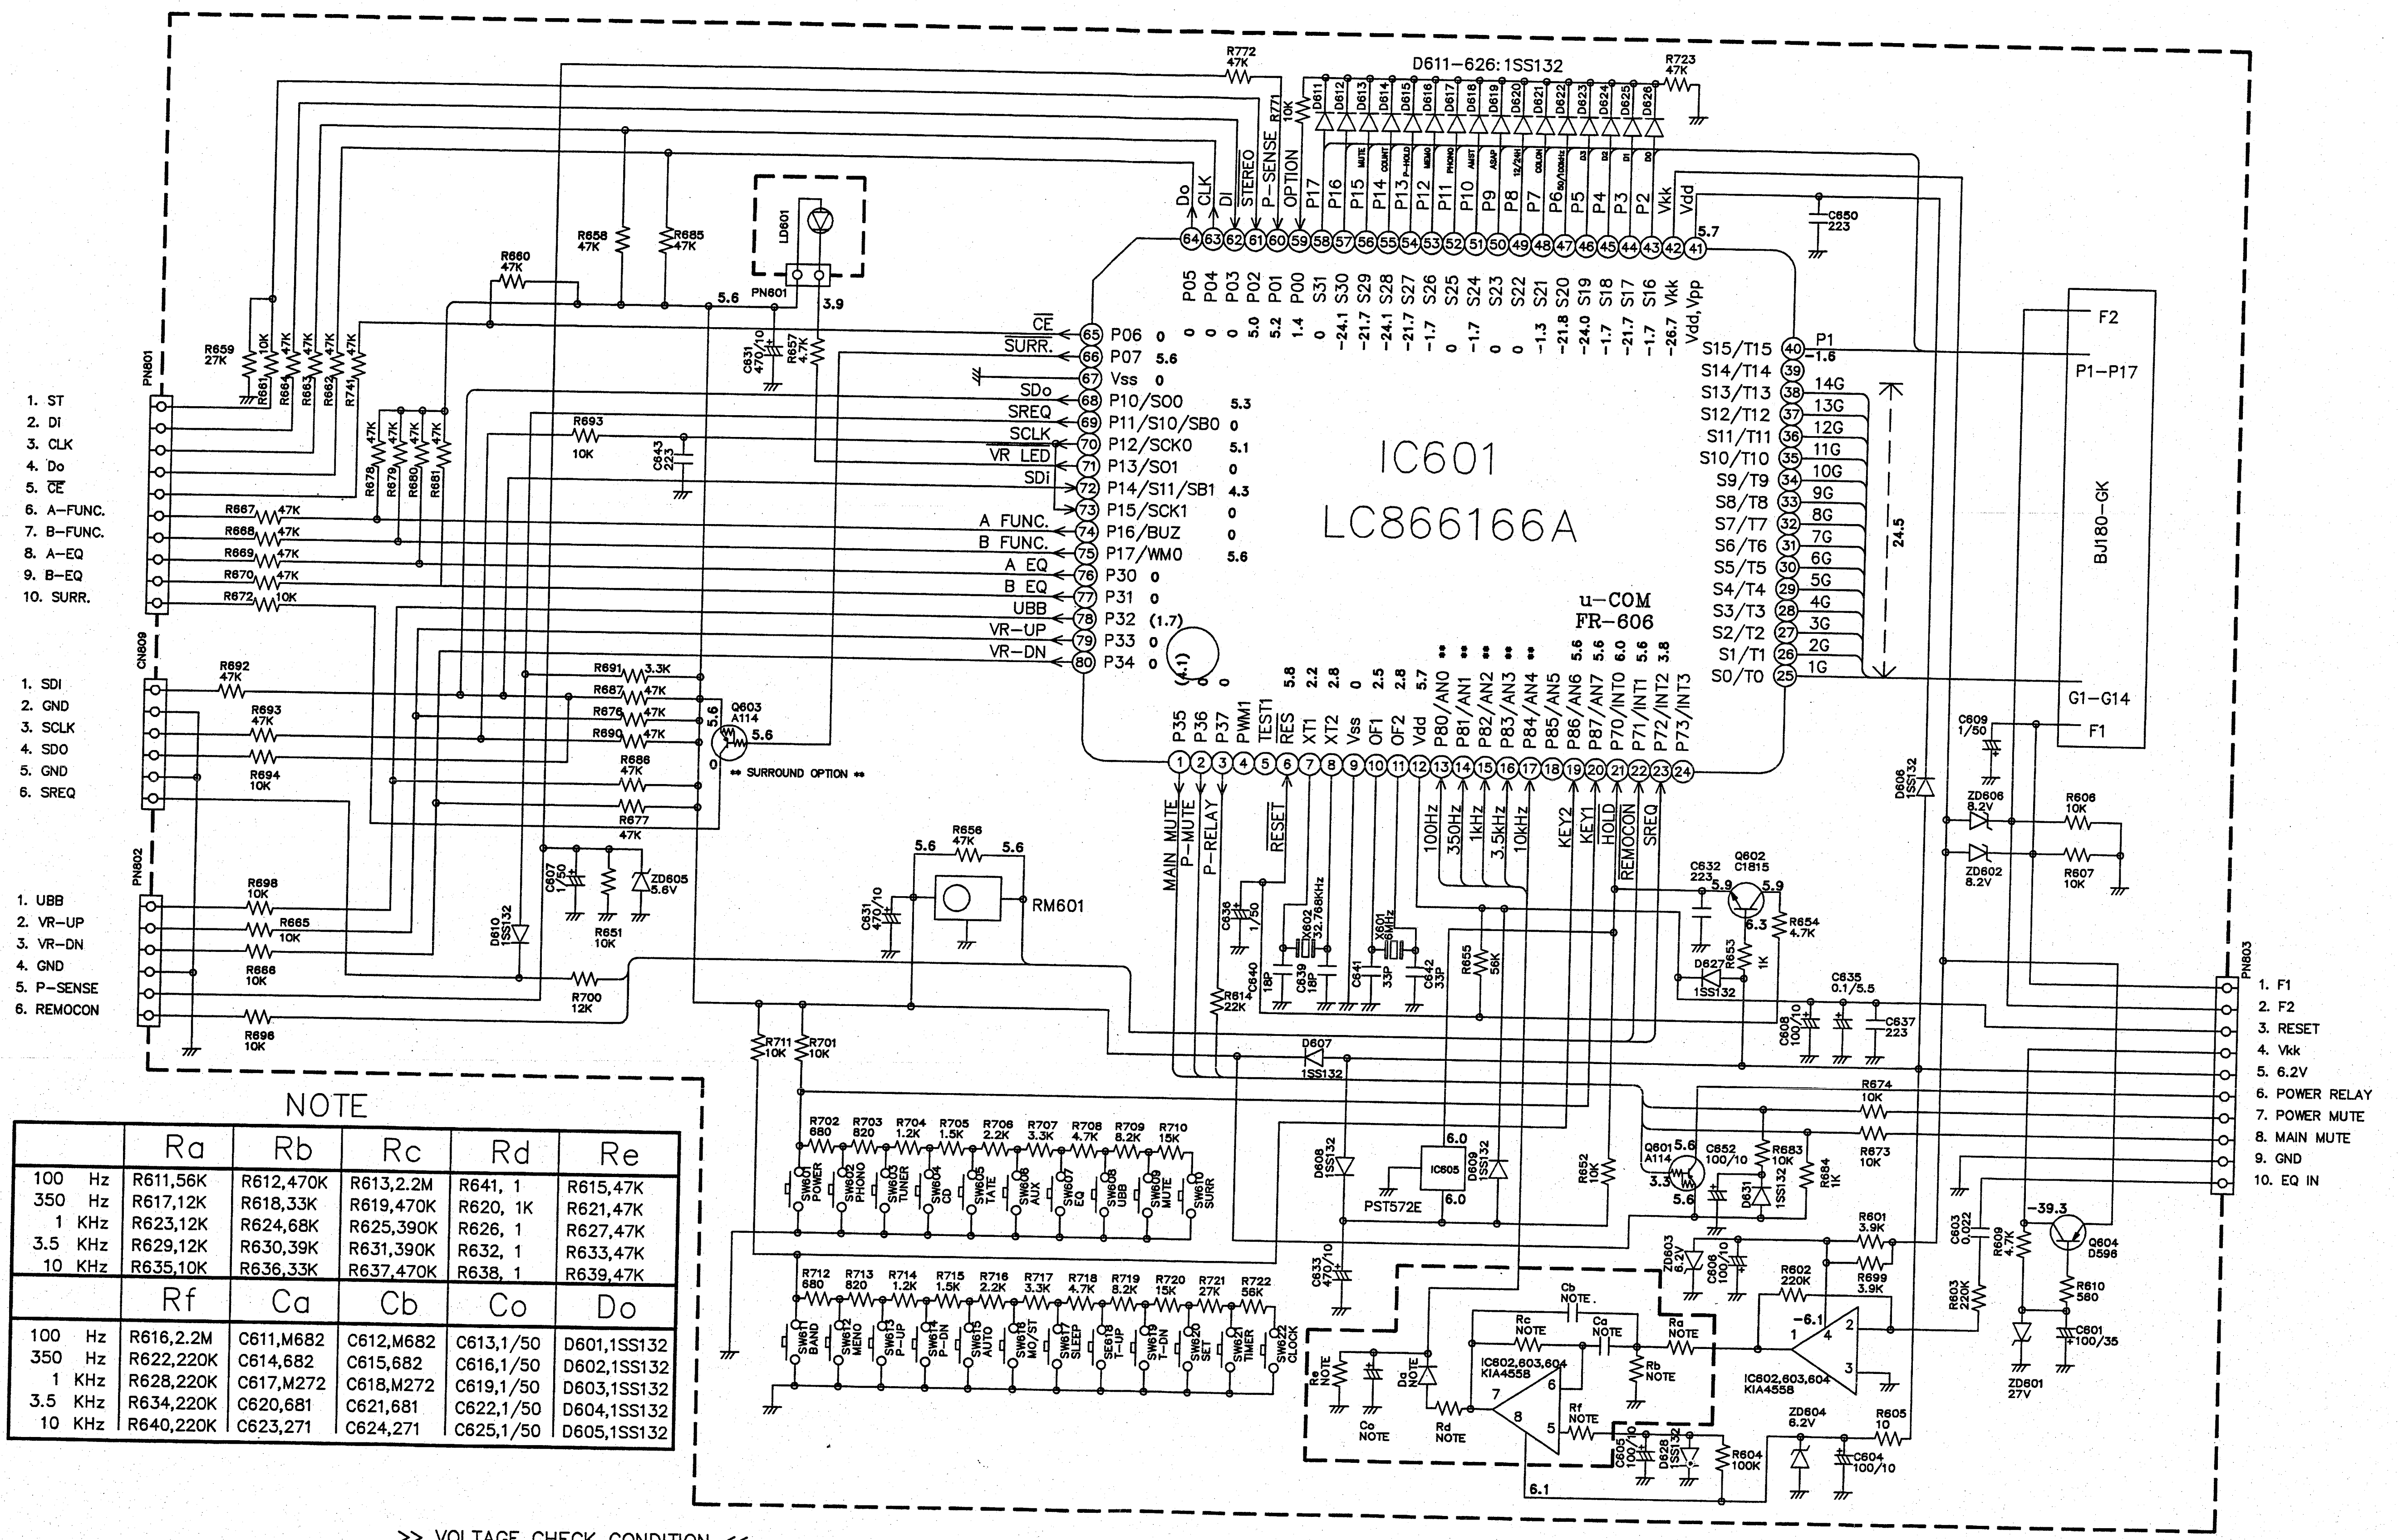
IC601
LC866166A
u-COM
FR-606
D611–626: 1SS132
PN801
1. ST
2. DI
3. CLK
4. Do
5. CE
6. A-FUNC.
7. B-FUNC.
8. A-EQ
9. B-EQ
10. SURR.
CN809
1. SDI
2. GND
3. SCLK
4. SDO
5. GND
6. SREQ
PN802
1. UBB
2. VR-UP
3. VR-DN
4. GND
5. P-SENSE
6. REMOCON
PN803
1. F1
2. F2
3. RESET
4. Vkk
5. 6.2V
6. POWER RELAY
7. POWER MUTE
8. MAIN MUTE
9. GND
10. EQ IN
BJ180-GK
F2
P1-P17
G1-G14
F1
LD601
RM601
PST572E
IC605
Q603 A114
Q602 C1815
Q601 A114
Q604 D598
IC602,603,604 KIA4558
** SURROUND OPTION **
X602 32.768KHz
X601
SW601 POWER
SW602 PHONO
SW603 TUNER
SW604 CD
SW605 TAPE
SW606 AUX
SW607 EQ
SW608 UBB
SW609 MUTE
SW610 SURR
SW611 BAND
SW612 MENO
SW613 T-UP
SW614 P-DN
SW615 AUTO
SW616 MO/ST
SW617 SLEEP
SW618 T-UP
SW619 T-DN
SW620 SET
SW621 TIMER
SW622 CLOCK
CE
SURR.
SDo
SREQ
SCLK
VR LED
SDi
A FUNC.
B FUNC.
A EQ
B EQ
UBB
VR-UP
VR-DN
MAIN MUTE
P-MUTE
P-RELAY
RESET
100Hz
350Hz
1kHz
3.5kHz
10kHz
KEY2
KEY1
HOLD
REMOCON
SREQ
Do
CLK
DI
STEREO
P-SENSE
OPTION
Vkk
Vdd
Ra NOTE
Rb NOTE
Rc NOTE
Rd NOTE
Re NOTE
Rf NOTE
Ca NOTE
Cb NOTE
Co NOTE
Do NOTE

NOTE

	Ra	Rb	Rc	Rd	Re
100 Hz	R611,56K	R612,470K	R613,2.2M	R641, 1	R615,47K
350 Hz	R617,12K	R618,33K	R619,470K	R620, 1K	R621,47K
1 KHz	R623,12K	R624,68K	R625,390K	R626, 1	R627,47K
3.5 KHz	R629,12K	R630,39K	R631,390K	R632, 1	R633,47K
10 KHz	R635,10K	R636,33K	R637,470K	R638, 1	R639,47K
	Rf	**Ca**	**Cb**	**Co**	**Do**
100 Hz	R616,2.2M	C611,M682	C612,M682	C613,1/50	D601,1SS132
350 Hz	R622,220K	C614,682	C615,682	C616,1/50	D602,1SS132
1 KHz	R628,220K	C617,M272	C618,M272	C619,1/50	D603,1SS132
3.5 KHz	R634,220K	C620,681	C621,681	C622,1/50	D604,1SS132
10 KHz	R640,220K	C623,271	C624,271	C625,1/50	D605,1SS132

>> VOLTAGE CHECK CONDITION <<

1. FUNCTION: AUX
2. VR: MINIMUM
3. EQ.: FLAT
4. NOTE: () —— Active state voltage

NOTES :
1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise (P=MICRO-MICRO FARADS).
3. Schematic diagram for this model are subject to change for improvement without prior notice.

PCB LAYOUT

● MAIN P.C.BOARD

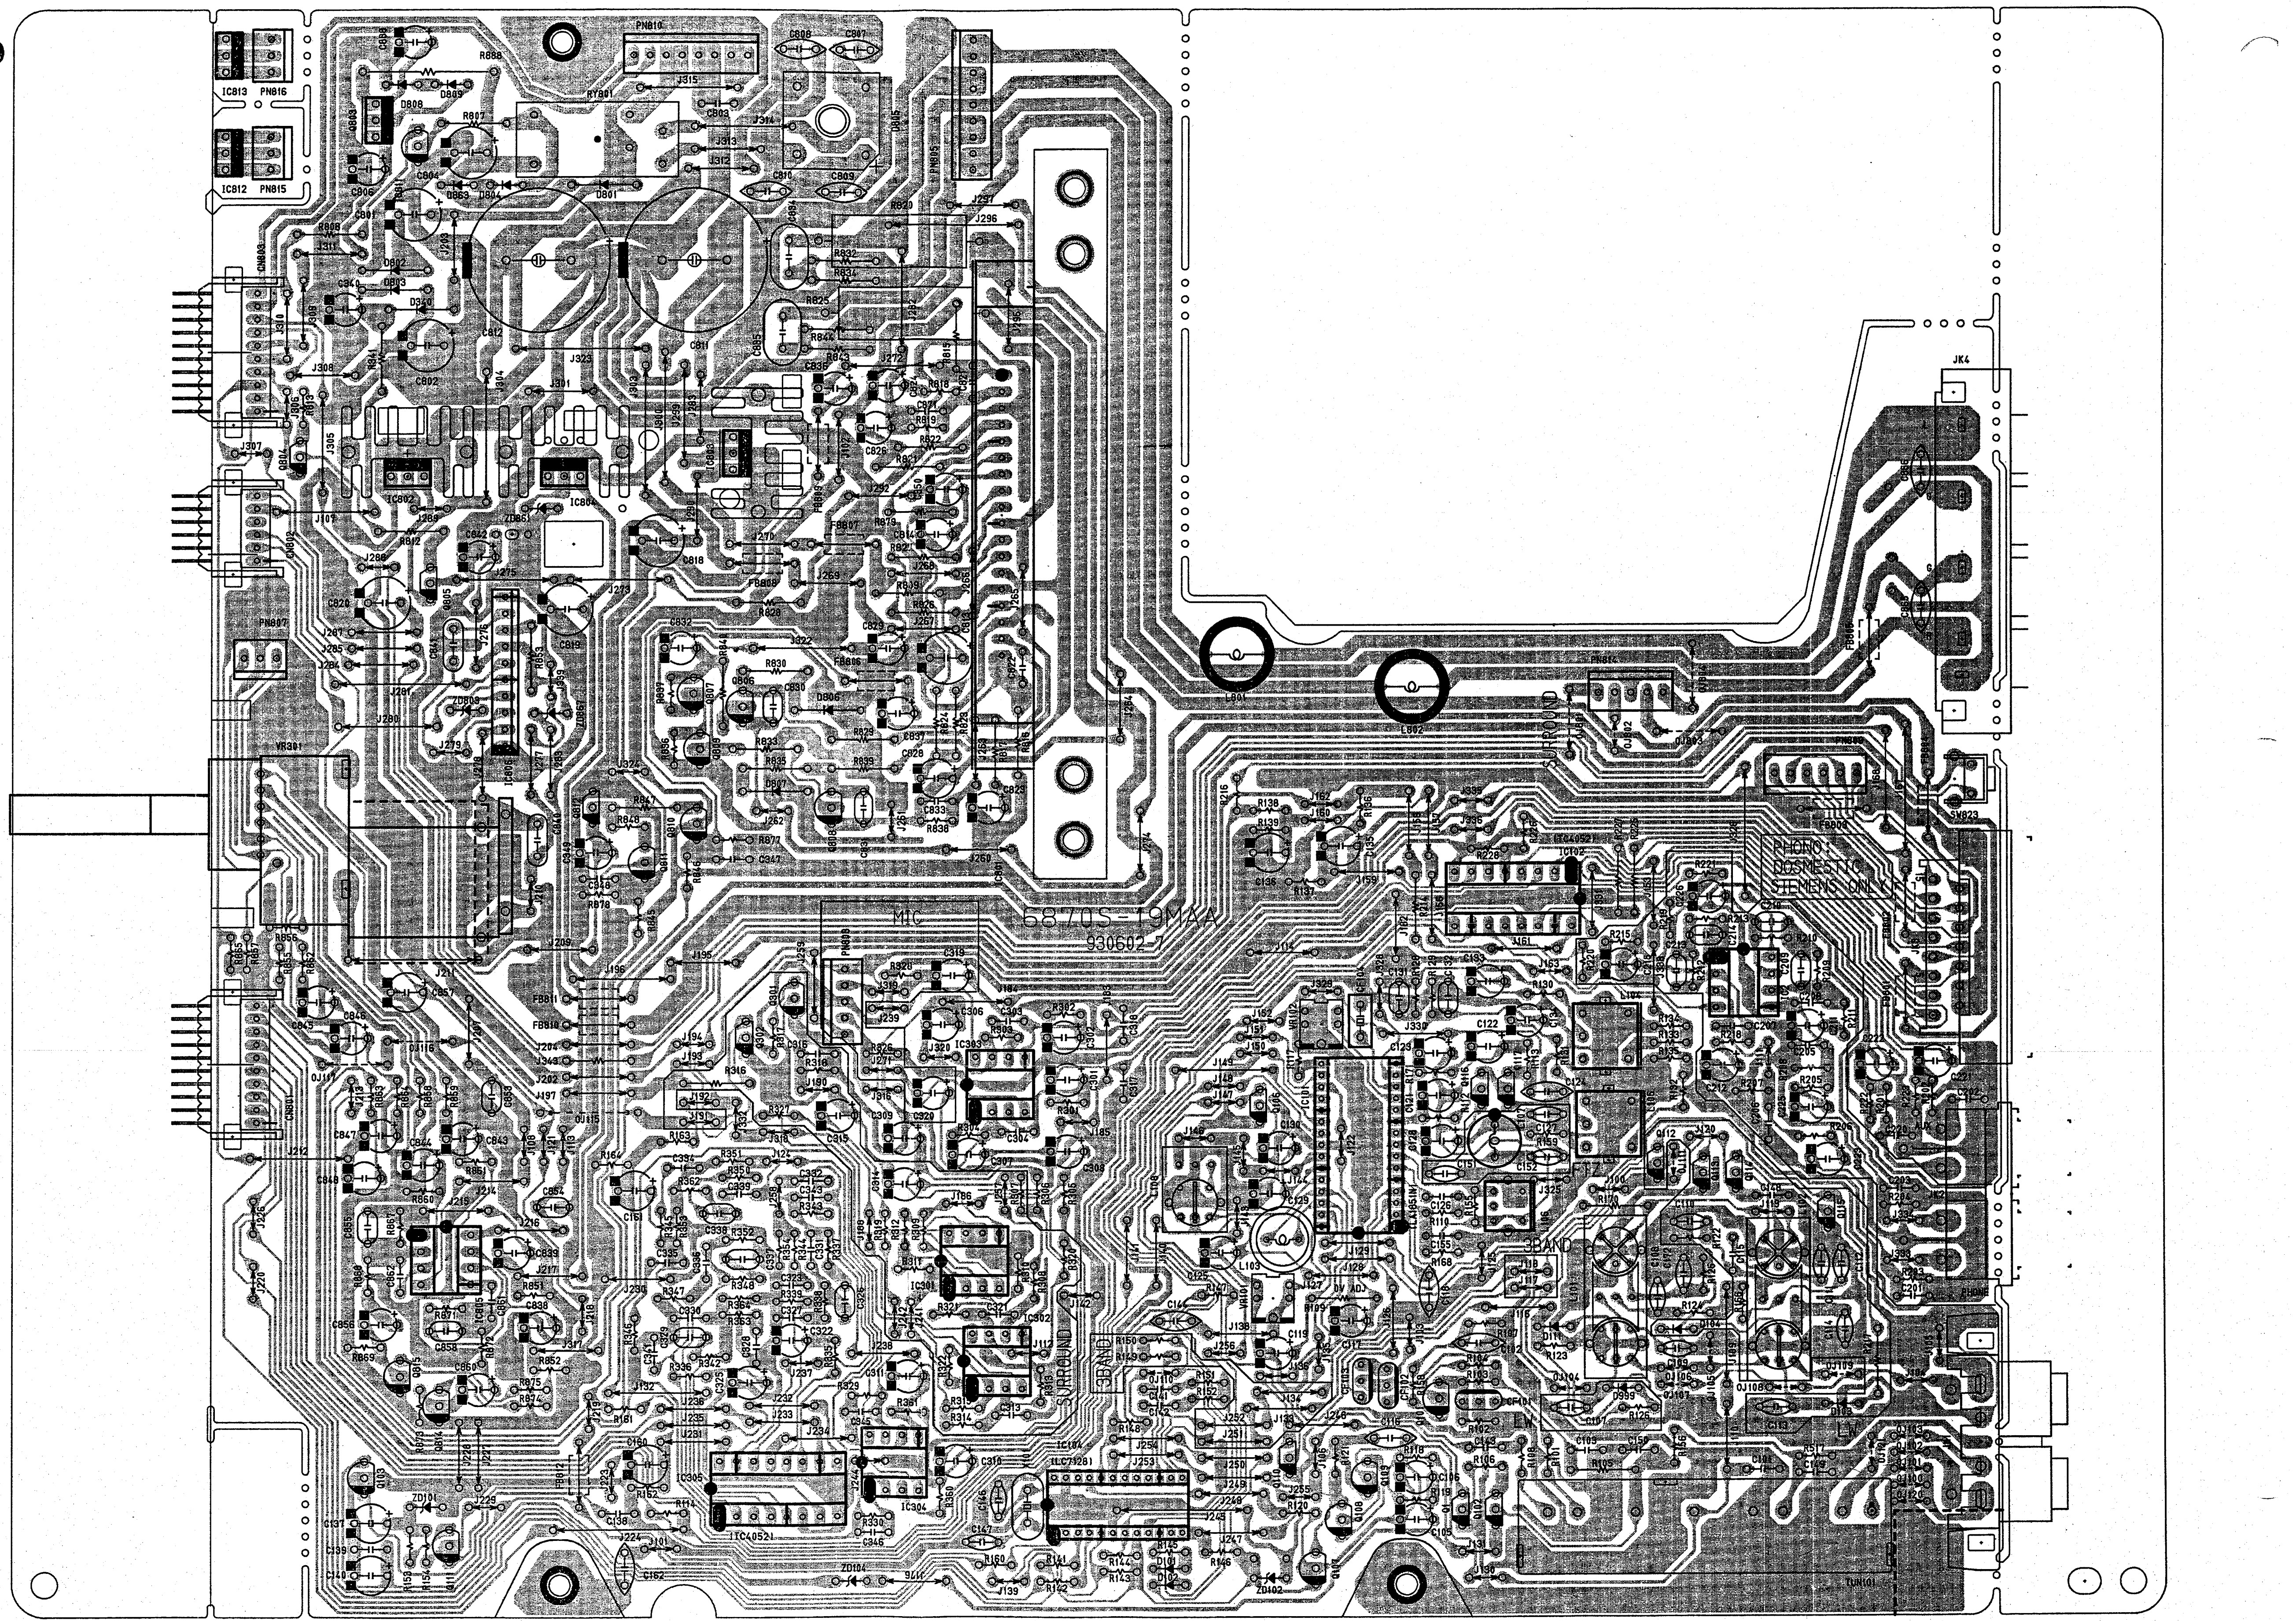
IC813
PN816
IC812
PN815
PN810
RY801
VR301
MIC
6870S-19MAA
930602-7
SURROUND
3BAND
PHONO:
DOSMESTIC
SIEMENS ONLY
JK4
SW823
L801
L802
IC102
IC4052
TUN101

● FRONT, PHONO & POWER P.C.BOARD

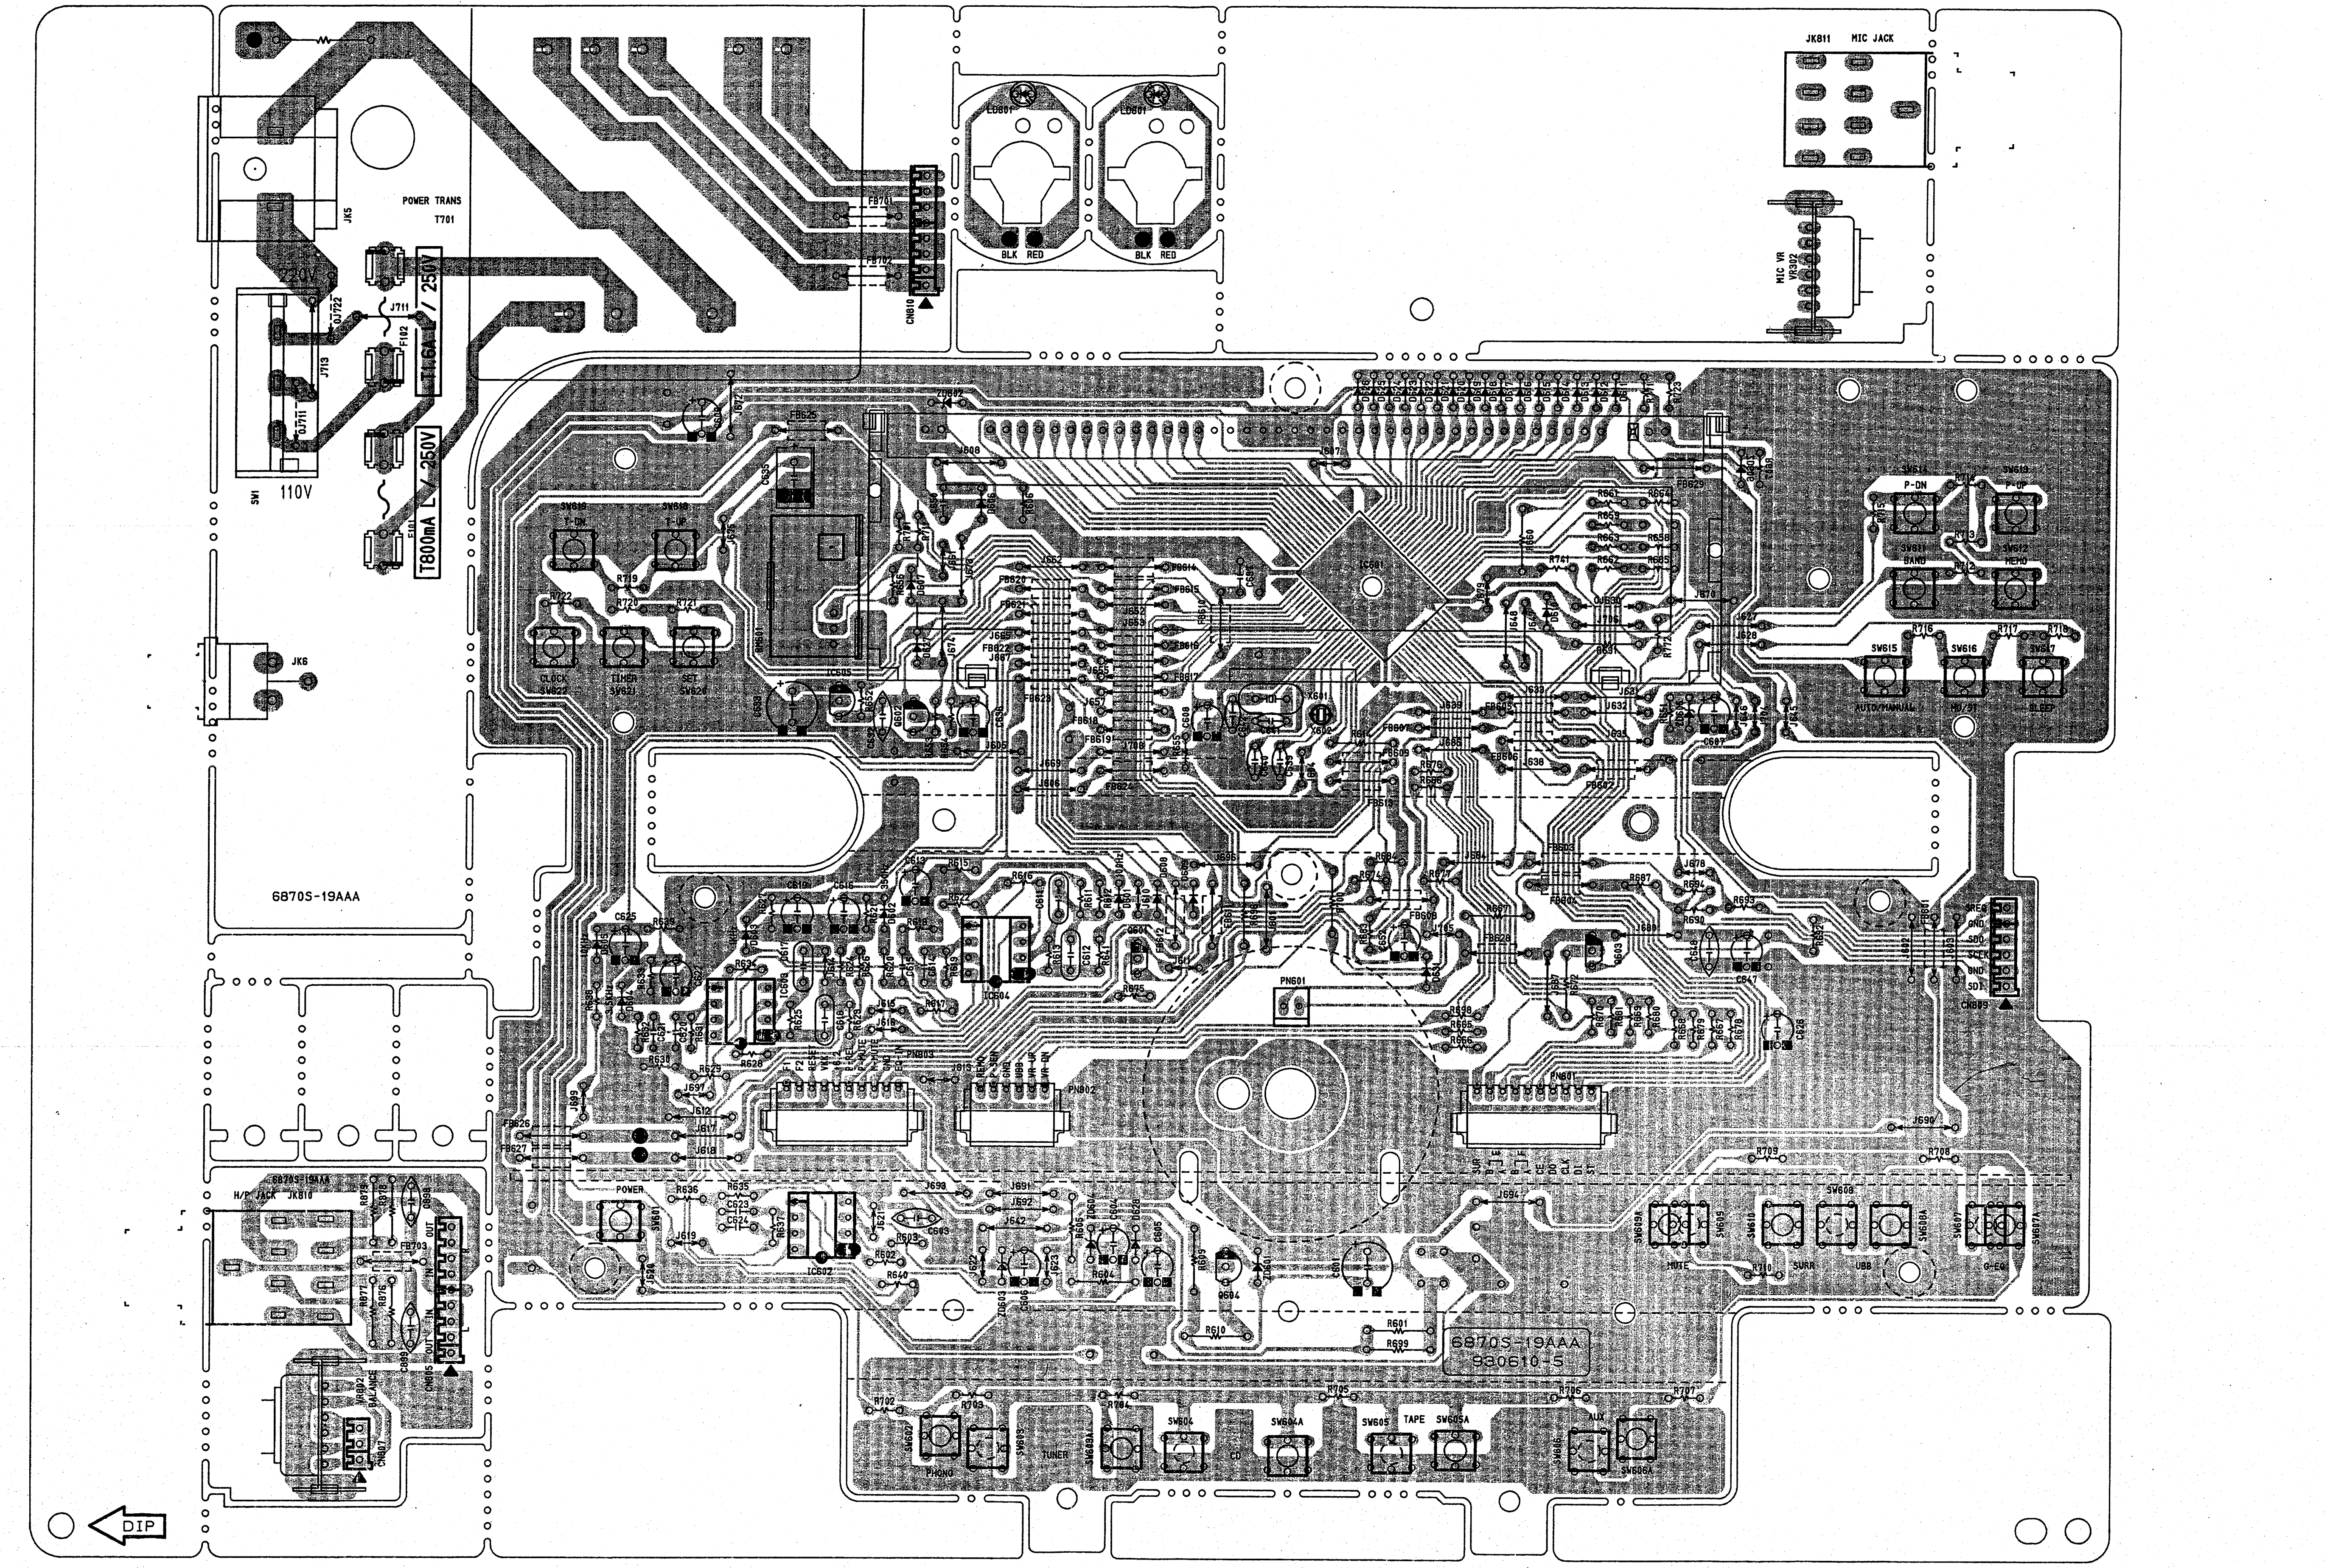
POWER TRANS
T701
JK5
JK6
T1.6A / 250V
T800mA L / 250V
110V
220V
SW1
J711
J713
F701
F702
CN810
LD801
LD802
BLK
RED
JK811
MIC JACK
MIC VR
VR302
IC601
P-ON
P-UP
BAND
MEMO
CLOCK
TIMER
SET
SW615
SW616
SW617
AUTO/MANUAL
MO/ST
SLEEP
POWER
IC602
IC603
IC604
PN601
PN801
PN802
PN803
H/P JACK
JK810
CN805
CN807
CN809
MUTE
SURR
UBB
G-EQ
PHONO
TUNER
CD
TAPE
AUX
SW602
SW603
SW604
SW604A
SW605
SW605A
SW606
SW606A
6870S-19AAA
6870S-19AAA
930610-5
DIP

WIRING DIAGRAM

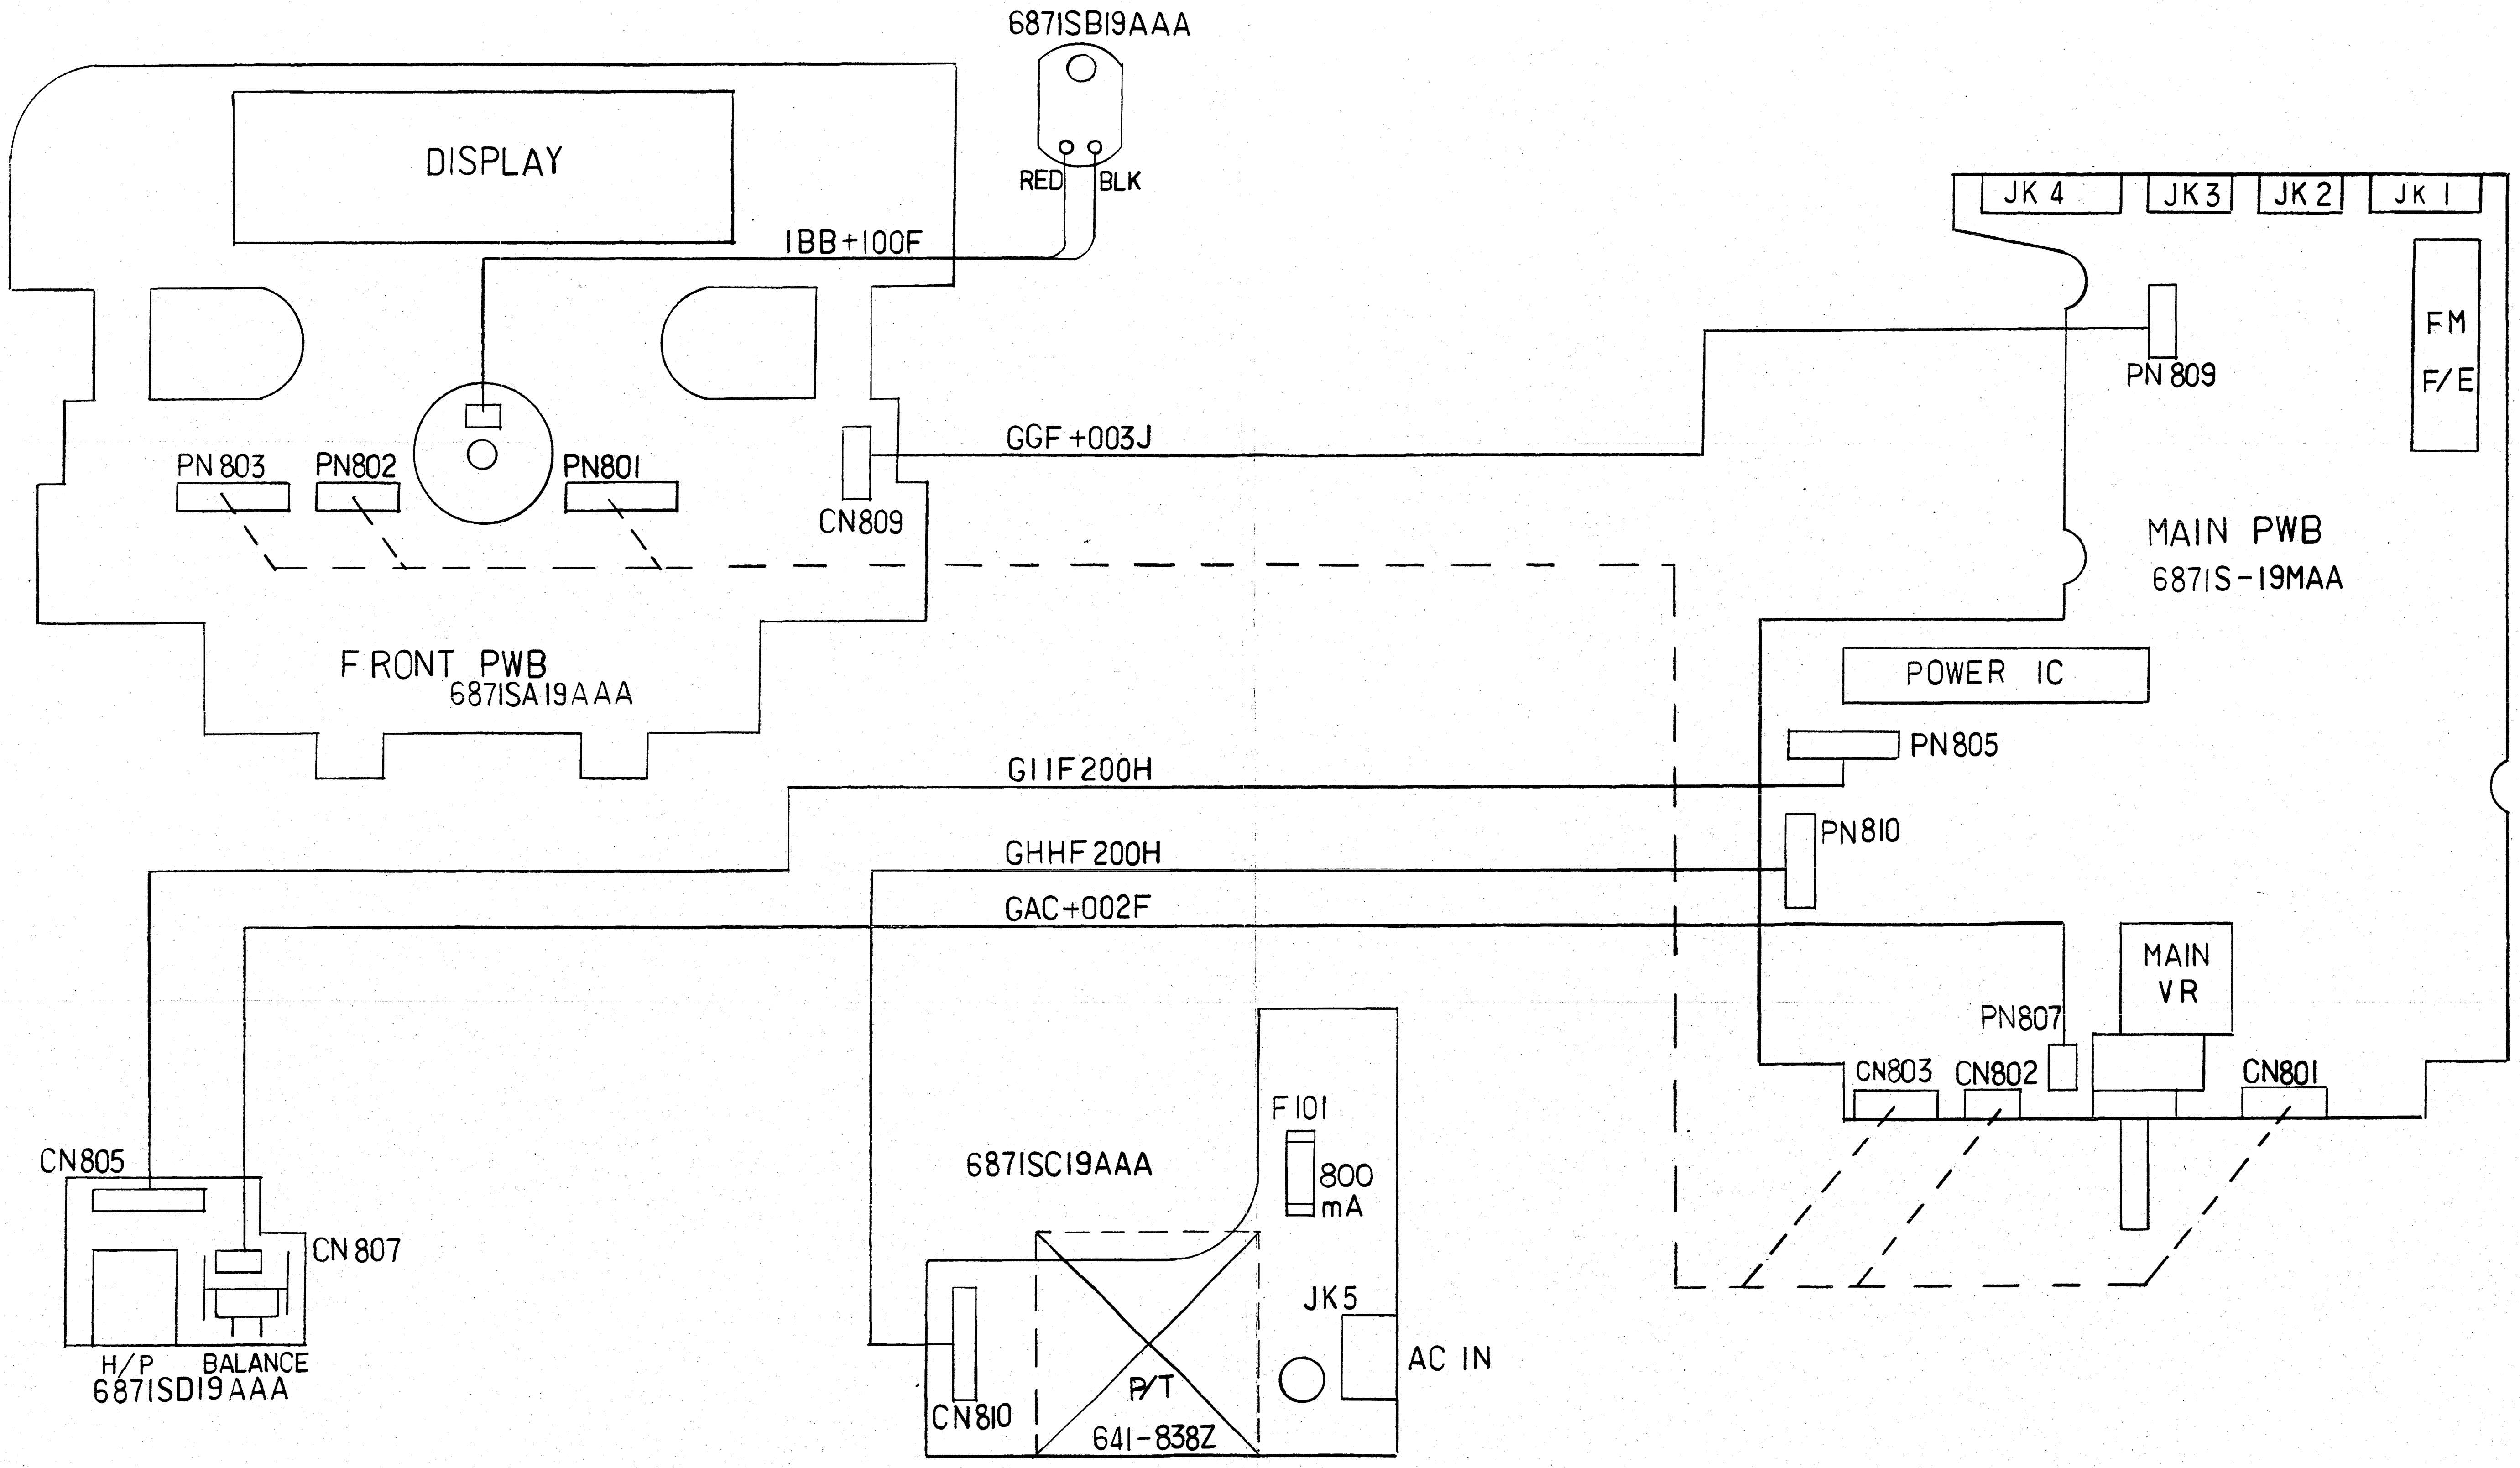
687ISBI9AAA
RED
BLK
DISPLAY
IBB+100F
PN803
PN802
PN801
CN809
GGF +003J
PN809
JK 4
JK3
JK2
JK I
FM
F/E
MAIN PWB
6871S-19MAA
F RONT PWB
687ISAI9AAA
POWER IC
PN805
GIIF200H
PN810
GHHF200H
GAC+002F
MAIN
VR
PN807
CN803
CN802
CN801
CN805
CN807
H/P
BALANCE
687ISDI9AAA
687ISCI9AAA
F101
800
mA
JK5
AC IN
CN810
P/T
641-838Z

LA1851N

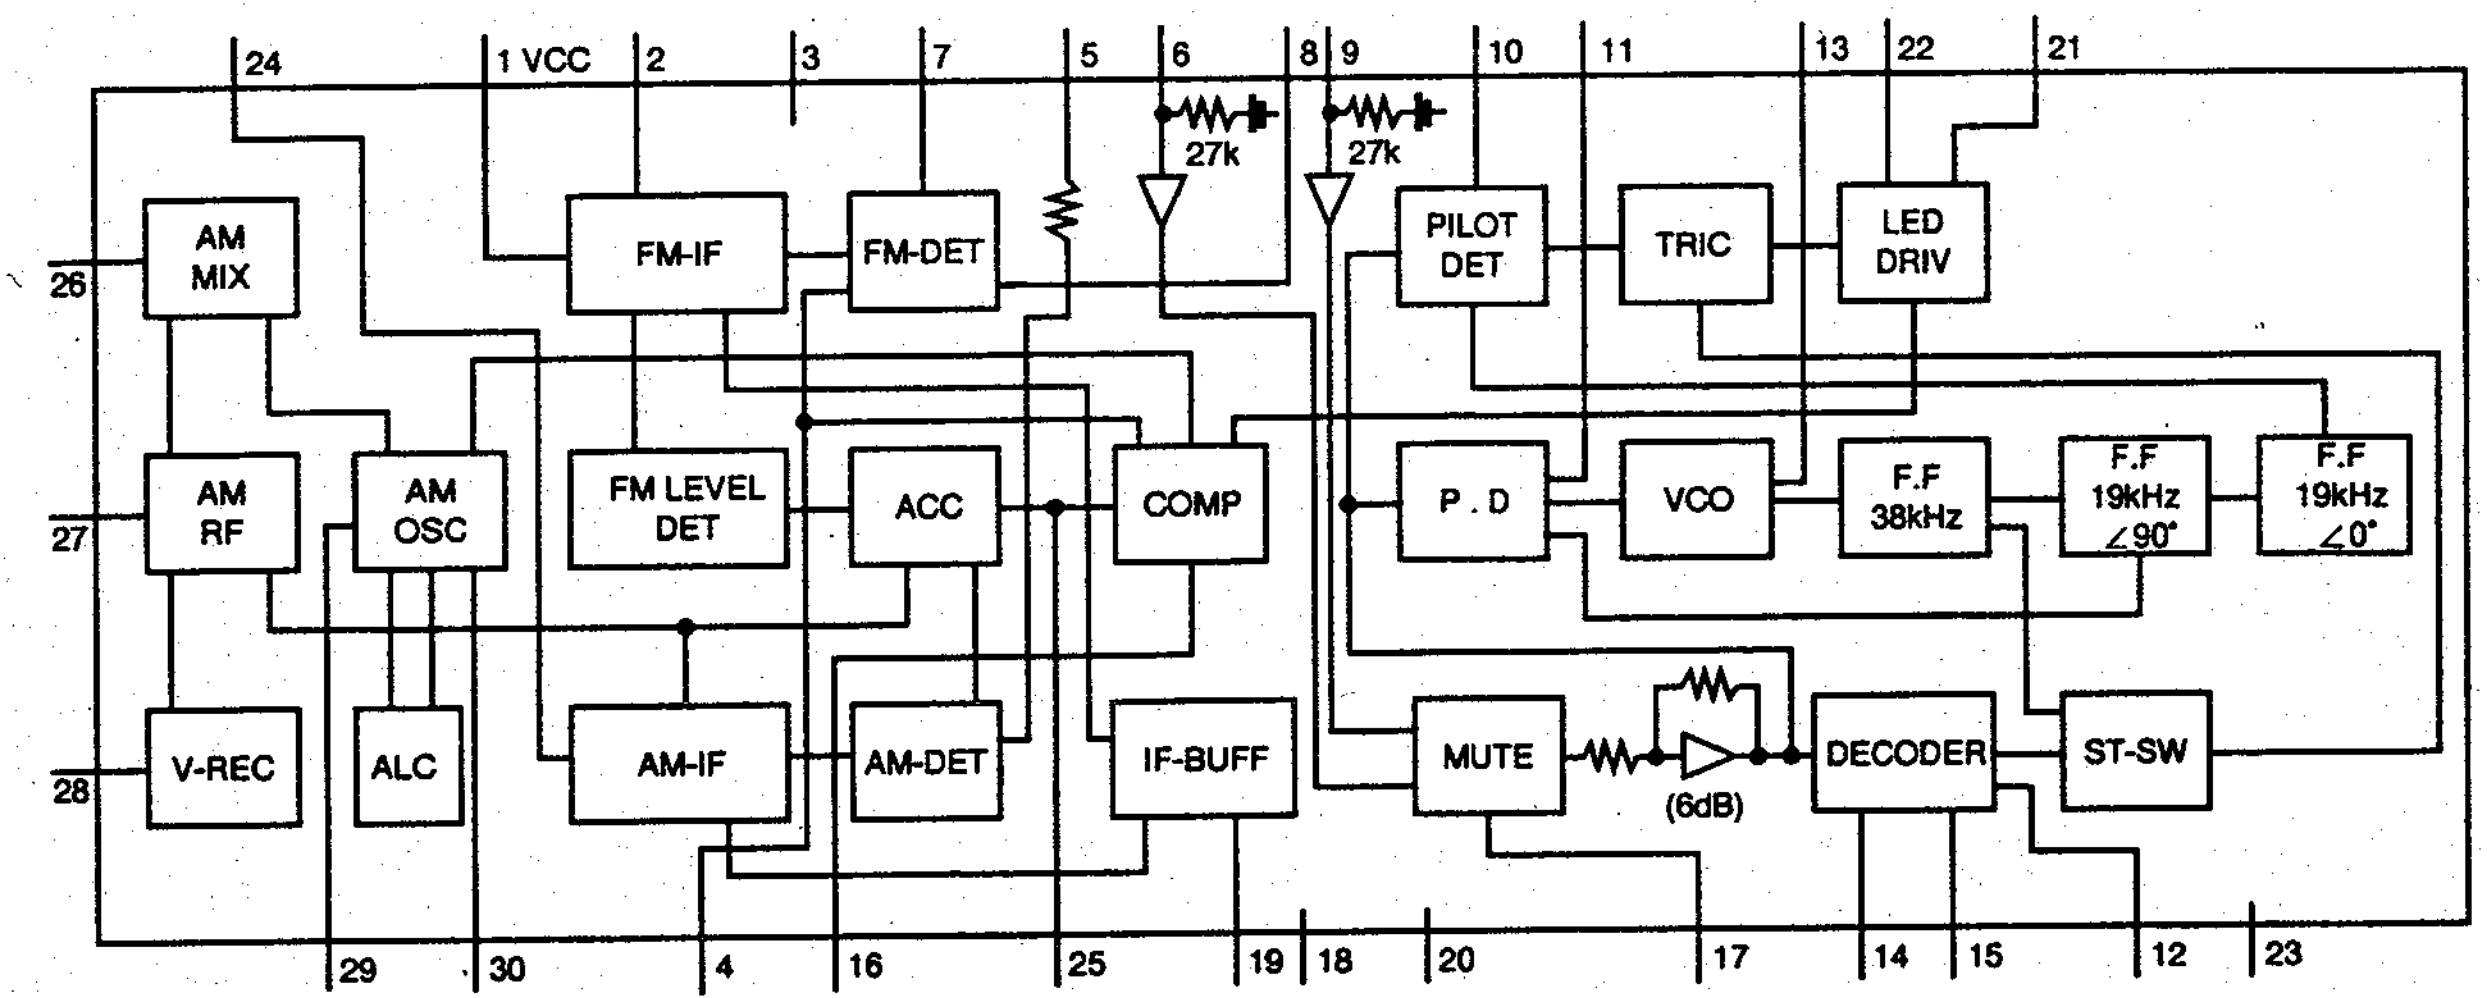
24
1 VCC
2
3
7
5
6
8
9
10
11
13
22
21
27k
27k
AM MIX
FM-IF
FM-DET
PILOT DET
TRIC
LED DRIV
26
AM RF
AM OSC
FM LEVEL DET
ACC
COMP
P . D
VCO
F.F 38kHz
F.F 19kHz ∠90°
F.F 19kHz ∠0°
27
V-REC
ALC
AM-IF
AM-DET
IF-BUFF
MUTE
(6dB)
DECODER
ST-SW
28
29
30
4
16
25
19
18
20
17
14
15
12
23

LC7218

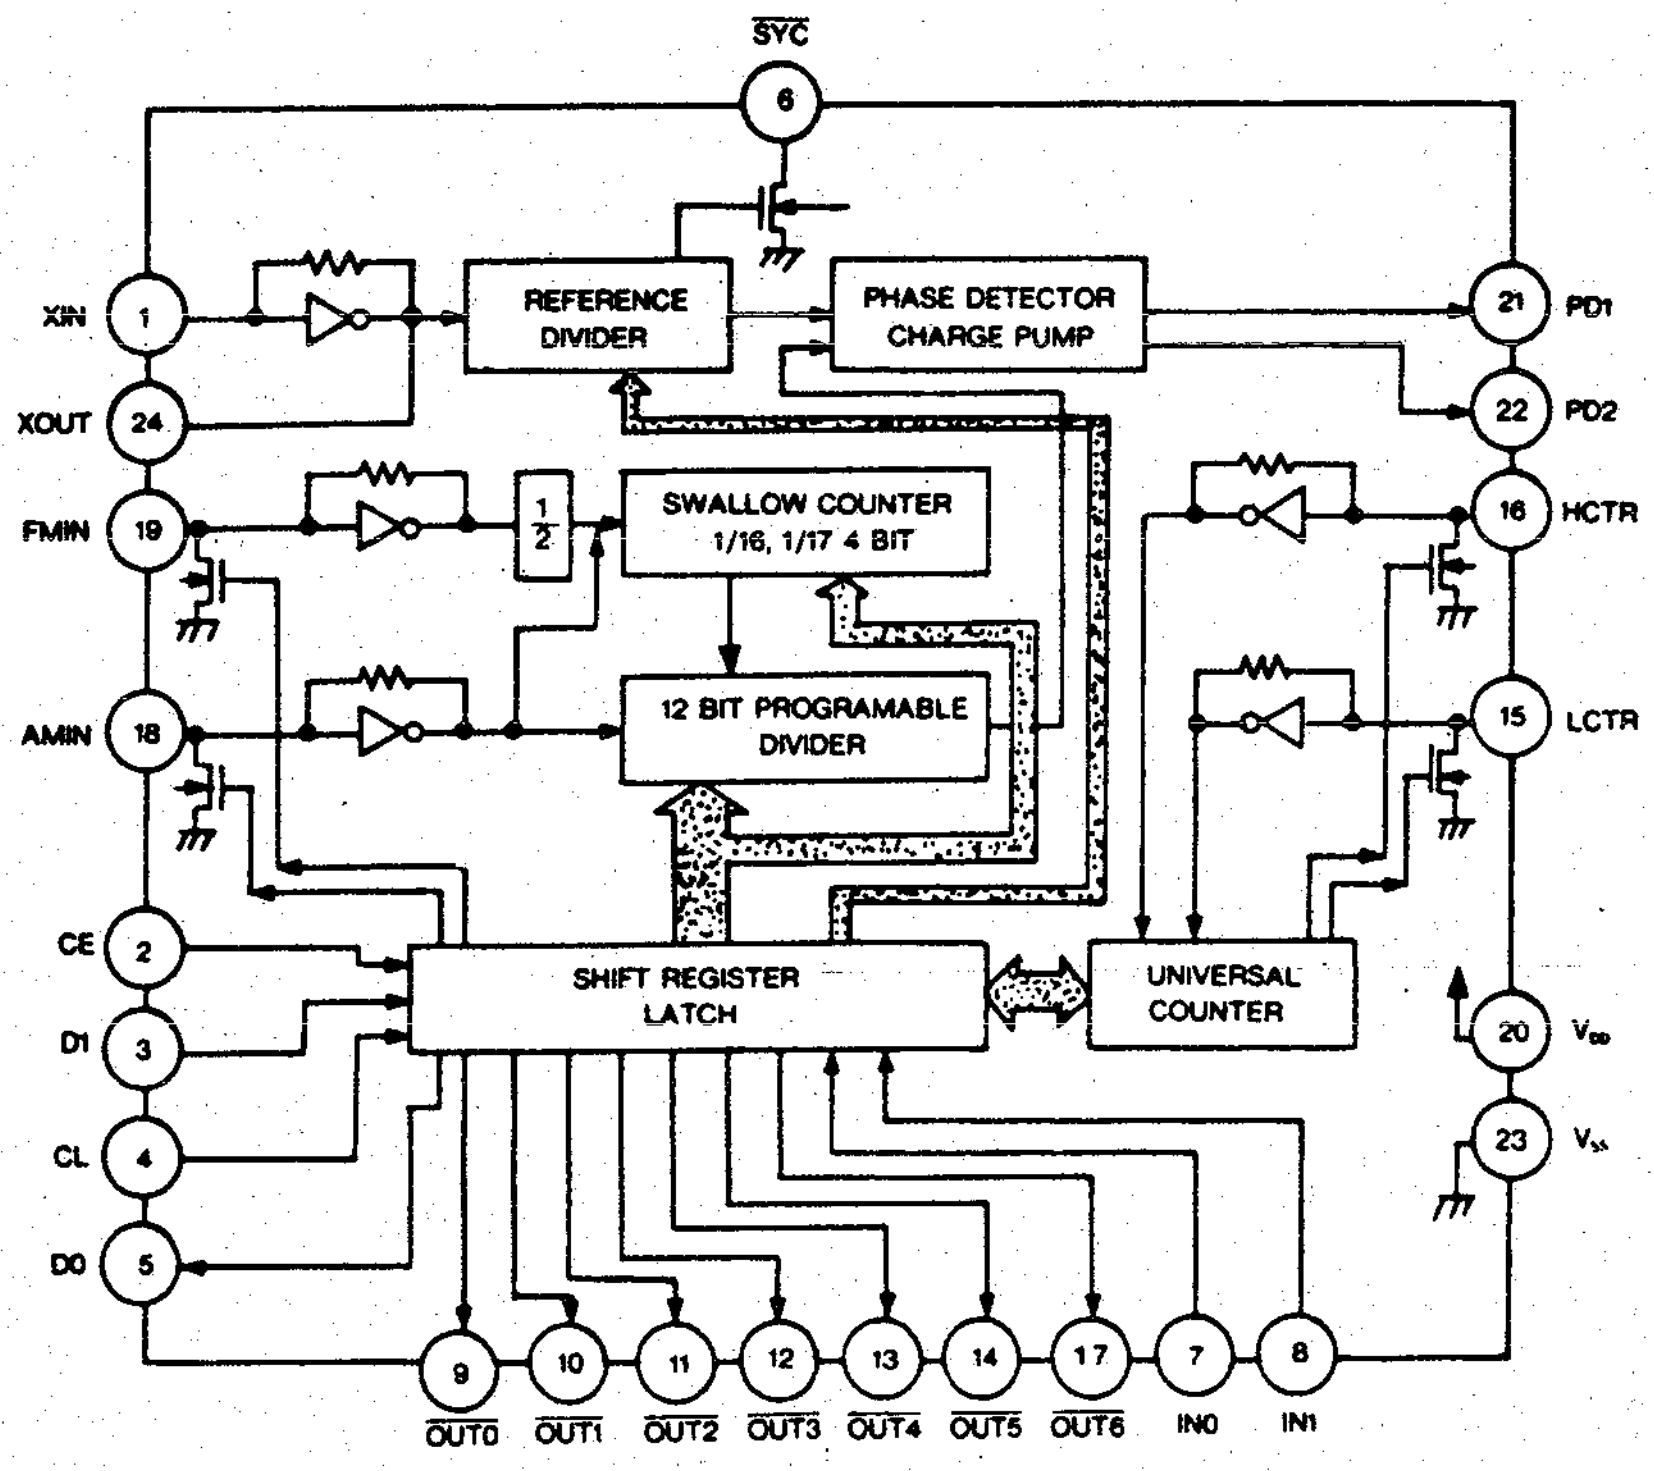
$\overline{\text{SYC}}$
6
XIN
1
XOUT
24
FMIN
19
AMIN
18
CE
2
DI
3
CL
4
DO
5
REFERENCE DIVIDER
PHASE DETECTOR CHARGE PUMP
SWALLOW COUNTER 1/16, 1/17 4 BIT
$\frac{1}{2}$
12 BIT PROGRAMABLE DIVIDER
SHIFT REGISTER LATCH
UNIVERSAL COUNTER
21
PD1
22
PD2
16
HCTR
15
LCTR
20
V_{DD}
23
V_{SS}
9
10
11
12
13
14
17
7
8
$\overline{\text{OUT0}}$
$\overline{\text{OUT1}}$
$\overline{\text{OUT2}}$
$\overline{\text{OUT3}}$
$\overline{\text{OUT4}}$
$\overline{\text{OUT5}}$
$\overline{\text{OUT6}}$
IN0
IN1

INTERNAL BLOCK DIAGRAM OF ICs

BA6209

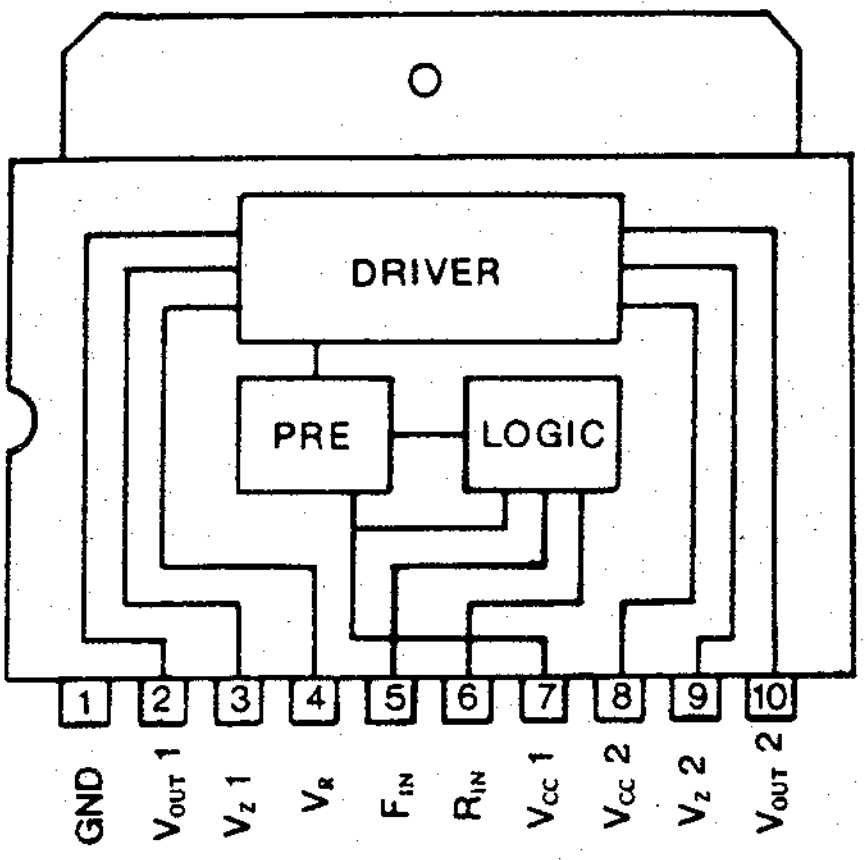
DRIVER
PRE
LOGIC
1
2
3
4
5
6
7
8
9
10
GND
V_{OUT} 1
V_Z 1
V_R
F_{IN}
R_{IN}
V_{CC} 1
V_{CC} 2
V_Z 2
V_{OUT} 2

HCF4052B

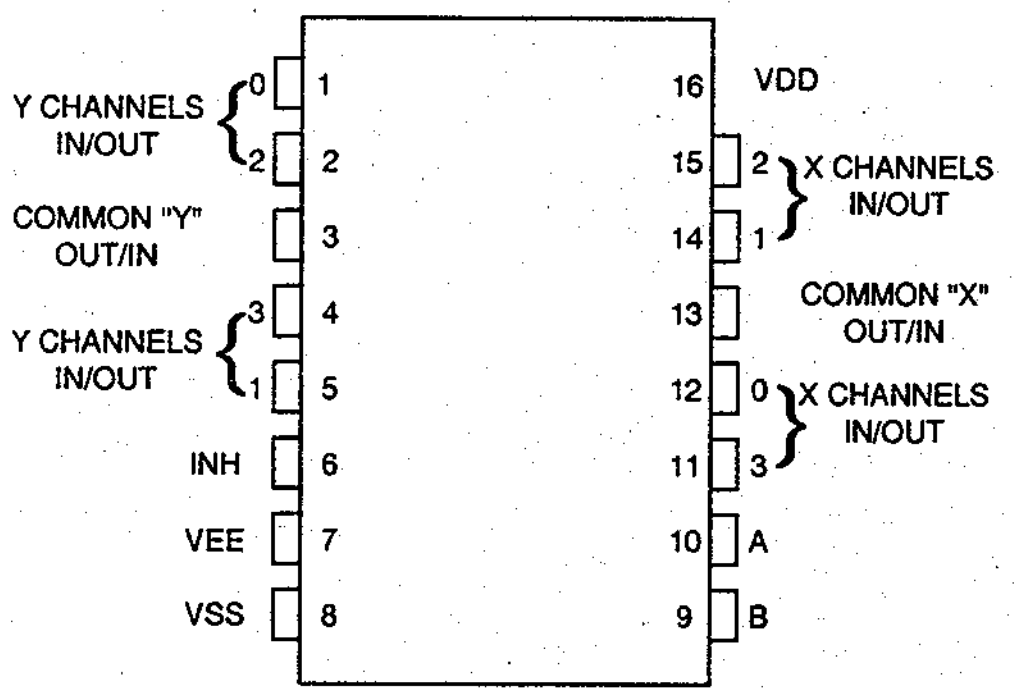
Y CHANNELS IN/OUT
0
2
COMMON "Y" OUT/IN
Y CHANNELS IN/OUT
3
1
INH
VEE
VSS
1
2
3
4
5
6
7
8
16
15
14
13
12
11
10
9
VDD
2
1
X CHANNELS IN/OUT
COMMON "X" OUT/IN
0
3
X CHANNELS IN/OUT
A
B

GL7812

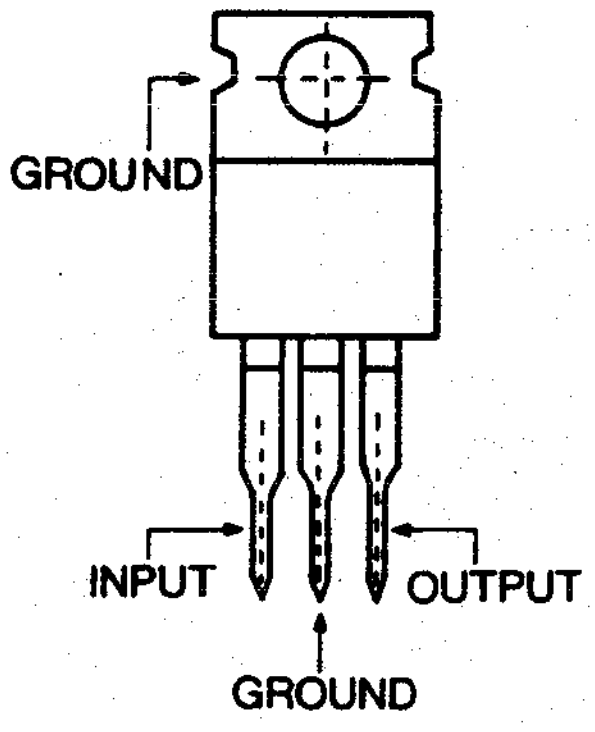
GROUND
INPUT
OUTPUT
GROUND

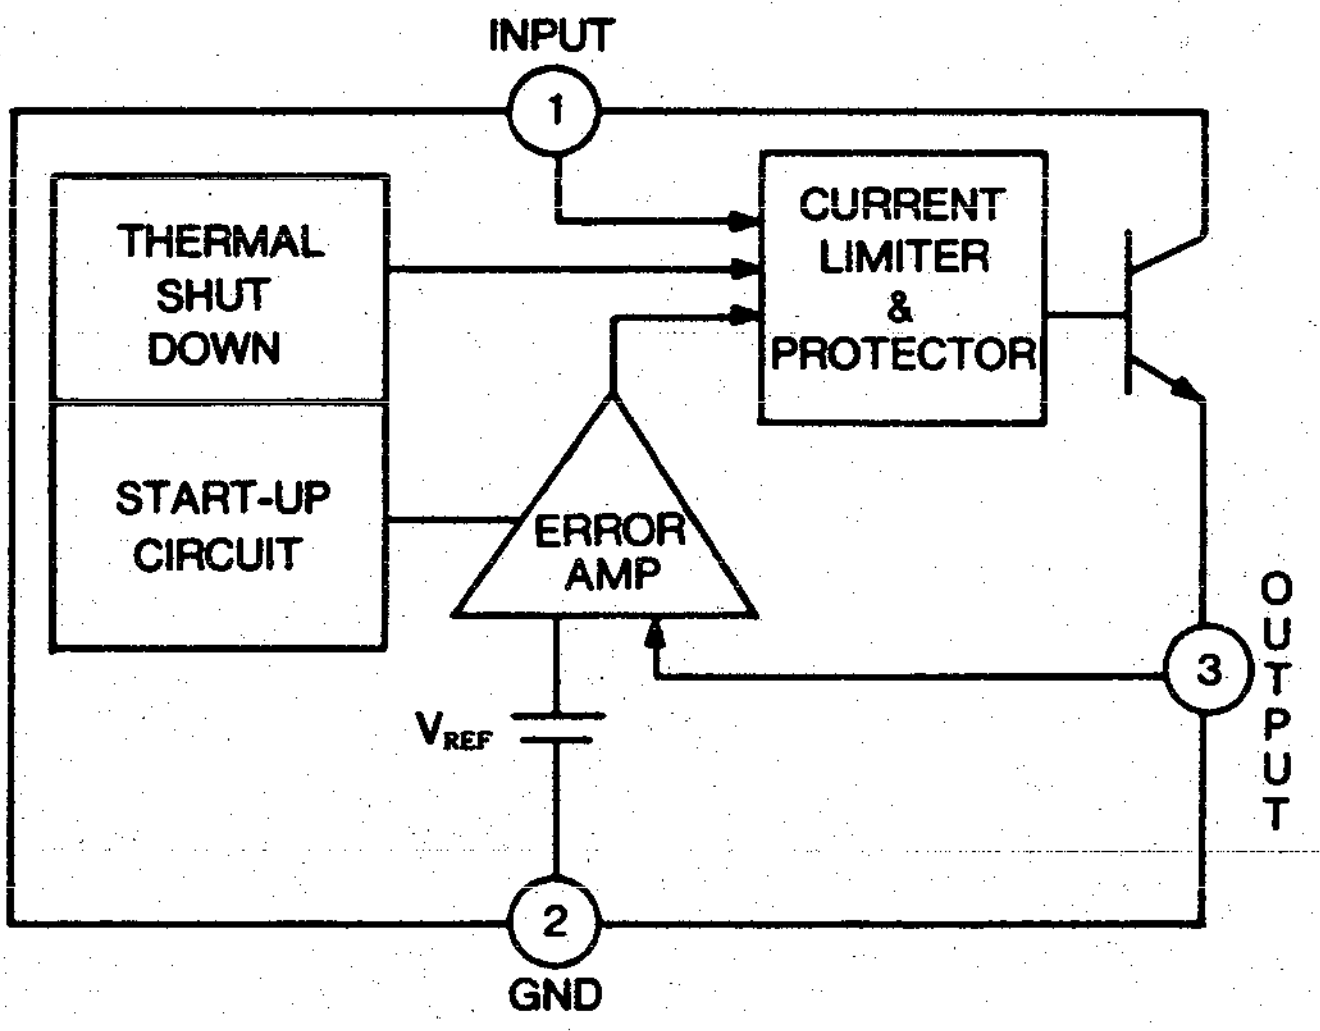
INPUT
1
THERMAL SHUT DOWN
START-UP CIRCUIT
CURRENT LIMITER & PROTECTOR
ERROR AMP
V_{REF}
3
OUTPUT
2
GND

KIA4558P


OUT A
IN(−)A
IN(+)A
VEE
1
2
3
4
A
B
8
7
6
5
VCC
OUT B
IN(−)B
IN(+)B

EXPLODED VIEW/PARTS LIST

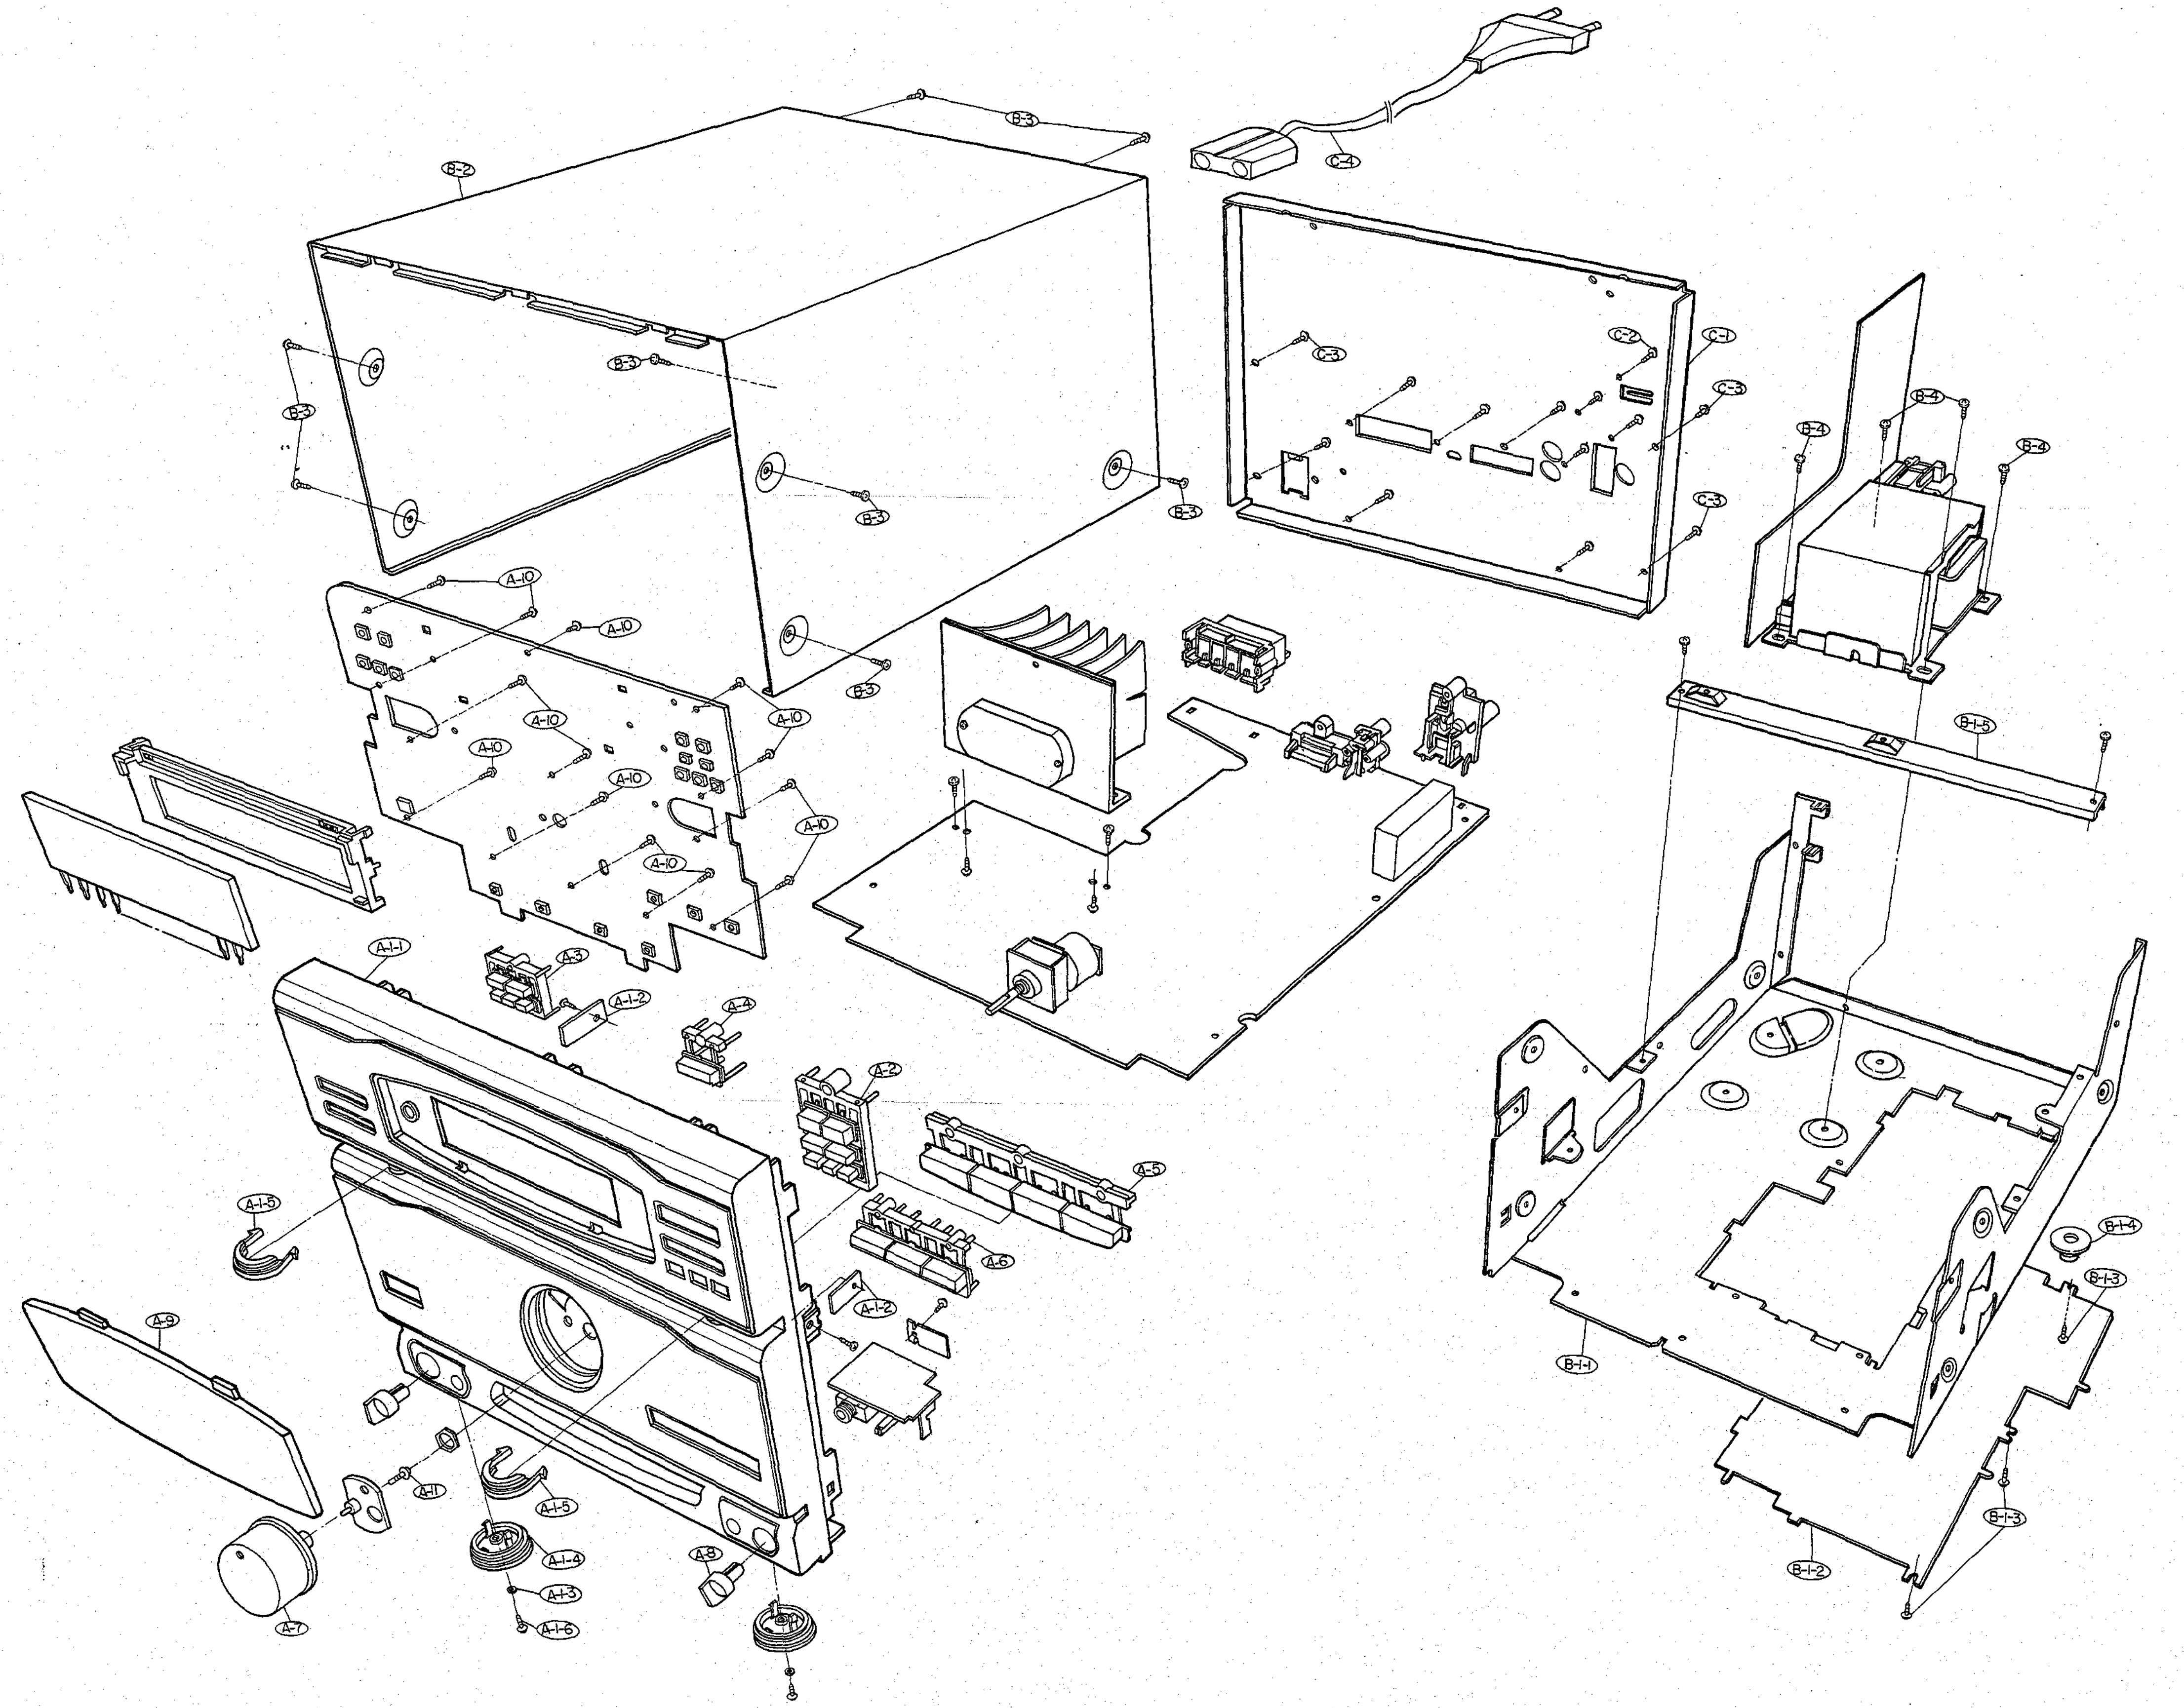

REF. NO.	PART NO.	DESCRIPTION	Q'TY
A	3721S-0608A	Panel Assembly, Front	1
A-1	3721SU0608A	Panel Sub Assembly, Front	1
A-1-1	3720S-0608A	Panel, Front	1
A-1-2	4810S-0720A	Bracket, Front Support	2
A-1-3	472-190G	Felt	2
A-1-4	265-606A	Foot, Front	2
A-1-5	264-606A	Leg, Foot	2
A-1-6	353-025C	Screw, Special 3×10	2
A-2	4940S-0610A	Knob, Preset	1
A-3	4940S-0611A	Knob, Tuning	1
A-4	4940S-0612A	Knob, Power	1
A-5	4940S-0614A	Knob, Function #4	1
A-6	4940S-0615A	Knob, UBB #3	1
A-7	4940S-0617A	Knob, VR	1
A-8	4940S-0618A	Knob, Balance	1
A-9	236-966A	Window, Front	1
A-10	353-025C	Screw, Special 3×10	13
A-11	1TBH0202018	Screw, 2×6	1
B	3141S-0608A	Chassis Assembly	1
B-1	3141SU0608A	Chassis Sub Assembly	1
B-1-1	3140S-0608A	Chassis, Main	1
B-1-2	256-601A	Plate, Bottom	1
B-1-3	1TRL0302016	Screw, 3×6	5
B-1-4	265-013A	Foot, Rubber	2
B-1-5	4810S-0069A	Bracket, Main	1
B-2	213-606A	Cabinet, Top	1
B-3	353-025C	Screw, Special 3×10	12
B-4	353-633A	Screw, Special 4×8	4
C	3721S-0609A	Panel Assembly, Back	1
C-1	3720S-0609A	Panel, Back	1
C-2	353-052A	Screw, 3×10	1
C-3	353-025C	Screw, Special 3×10	21
C-4	681-035N	Cord, Power	1

NOTE : Ref. No. shows a group unit of assembly.

⌈REPLACEMENT PARTS LIST⌋ P A G E : 1

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
			1TBH0202018	BINDING HEAD TAPPING SCREW + 2	D 2.0 L 6.0 MSWR3/FZY	
			1TRL0302016	BRAIZER HEAD TA SCREW + 2 CUT	D 3.0 L 6.0 MSWR3/(BK)	
			213-606A	CABINET IS4041		
			236-966A	WINDOW	WINDOW FRONT (FR-606)	
			256-601A	PLATE	BOTTOM (R-606)	
			256-602A	SENSING PLATE ASSY		
			264-606A	LEG	DECO FOOT (F-606)	
			265-013A	FOOT	RUBBER (FFH-303)	
			265-606A	FOOT	FOOT FRONT(F-606)	
			3140S-0608A	CHASSIS	MAIN (R-606)	
			3141SU0608A	CHASSIS ASSY	CHASSIS SUB AY (FR-606L BG1)	
			316-851A	REMOCON ASSY	FR-606L(G/S) LABEL DONG-DO	
			353-025C	SCREW	SPECIAL 3X10 FBK	
			353-052A	SCREW	* TAPPING,WASHER 3X10 CU-COAT	
			353-633A	SCREW	SPECIAL 4X8 BK	
			3720S-0608A	PANEL	PANEL FRONT (FR-606)	
			3720S-0609A	PANEL	BACK (R-606)	
			3721S-0609A	PANEL ASSY	PANEL BACK AY (FR-606L BG1)	
			3721SU0608A	PANEL ASSY	PANEL FRONT SUB AY (FR-606)	
			3875S-5007A	MANUAL, OPERATION ASSY	F-606 BG1 (R,J)	
			3890S-C032A	BOX	FR-606 BG1	
			472-190G	FELT	FELT (F-606)	
			4810S-0720A	BRACKET	FRONT SUPPORT	
			4940S-0610A	KNOB	PRESET (FR-606)	
			4940S-0611A	KNOB	TUNING (FR-606)	
			4940S-0612A	KNOB	POWER (R-606)	
			4940S-0614A	KNOB	FUNCTION #4 (R-606)	
			4940S-0615A	KNOB	UBB #3 (R-606)	
			4940S-0617A	KNOB	VR (R-606)	
			4940S-0618A	KNOB	BALANCE (R-606)	
			563-655A	CONNECTOR ASSY	COAX, 300MM	
			586-001C	FUSE HOLDER	PIN-T 5X20 KS (S)	
			632-218F	COIL ANTENNA	COIL ANT LOOP MW(W/O LABEL,LUG	
			681-035N	CORD POWER	M4206+H03VVH2-F+M1250A,MAYOR	
			6871S-19AAA	PWB ASSY	FR-606 FRONT/PHONO/POWER	
			6871S-19MAA	PWB ASSY	FR-606 MAIN PWB	
			6871SA19AAA	PWB ASSY	FR-606 FRONT ASSY	
			6871SB19AAA	PWB ASSY	FR-606 LED ASSY	
			6871SC19AAA	PWB ASSY	FR-606 POWER ASSY	
			6871SD19AAA	PWB ASSY	FR-606 H/P ASSY	
		CF101	616-010B	FILTER CERAMIC	SFE10.7MS3GH(RD) 180K (S)	
		CF102	616-010B	FILTER CERAMIC	SFE10.7MS3GH(RD) 180K (S)	
		CF103	616-010B	FILTER CERAMIC	SFE10.7MS3GH(RD) 180K (S)	
		CF104	616-020L	FILTER CERAMIC	RESO NATOR,CSB456F15	
		CN801	561-803J	CONNECTOR	WAFER,B TO B 53114-1010	
		CN802	561-803F	CONNECTOR	WAFER,B TO B 53114-0610	
		CN803	561-803J	CONNECTOR	WAFER,B TO B 53114-1010	
		CN805	GIIF200H	WIRE	C,AY GSIL-G09/IL-J09(21)240(S)	
		CN807	GAC+002F	WIRE	C,AY GSIL-G03/IL-J03 (I)200(S)	
		CN809	GGF+003J	WIRE	C,AY GS IL-G06/IL-J06 (I) 380	

⌈REPLACEMENT PARTS LIST⌋ P A G E : 2

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		CN810	GHHF200H	WIRE	C,AY GSIL-G08/IL-J08(21)240(S)	
		C101	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C102	0CK1030K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.01UF 50V Z F TS	
		C103	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C105	0CE1046K618	CAPACITOR,ELECTROLYTIC	0.1M SMS 50V M FL TP(5)	
		C106	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C107	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C109	0CC0500K115	CAPACITOR CERAMIC(TEMP COMP)	5P 50V D NPO TS	
		C110	0CC1210K405	CAPACITOR,CERAMIC(TEMP COMP)	120P 50V J SL TS	
		C111	0CC0800K115	CAPACITOR CERAMIC(TEMP COMP)	8P 50V D NPO TS	
		C112	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C113	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C114	0CC2200K415	CAPACITOR CERAMIC(TEMP COMP)	22P 50V J NPO TS	
		C116	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C117	0CE3356K618	CAPACITOR,ELECTROLYTIC	3.3M SMS 50V M FL TP(5)	
		C118	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C119	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C121	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C122	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C123	0CE2246K618	CAPACITOR,ELECTROLYTIC	0.22M SMS 50V M FM5 TP(5)	
		C124	0CK1040K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.1UF 50V Z F TS	
		C125	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C127	0CC3310K405	CAPACITOR CERAMIC(TEMP COMP)	330P 50V J SL TS	
		C128	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C129	0CE1046K618	CAPACITOR,ELECTROLYTIC	0.1M SMS 50V M FL TP(5)	
		C130	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C131	0CQ1831N409	CAPACITOR POLYESTER(MYLAR)	0.018U 100V J POLY TP	
		C132	0CQ1831N409	CAPACITOR POLYESTER(MYLAR)	0.018U 100V J POLY TP	
		C133	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C134	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M-FM5 TP(5)	
		C135	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C136	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C137	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C138	0CN1040K948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.1UF 50V Z F TA26	
		C139	0CN1040K948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.1UF 50V Z F TA26	
		C140	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C141	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C142	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C143	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C144	0CK1020K945	CAPACITOR,CERAMIC(HIGH DIELE)	1000P 50V Z F TS	
		C146	0CC3900K415	CAPACITOR CERAMIC(TEMP COMP)	39P 50V J NPO TP	
		C147	0CC3900K415	CAPACITOR CERAMIC(TEMP COMP)	39P 50V J NPO TP	
		C148	0CN1040K948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.1UF 50V Z F TA26	
		C150	0CN2230H948	CAPACITOR,TUBULAR(HIGH DIELEC)	0.022UF 25V Z F TA26	
		C151	0CC3310K405	CAPACITOR CERAMIC(TEMP COMP)	330P 50V J SL TS	
		C152	0CC8200K505	CAPACITOR CERAMIC(TEMP COMP)	82P 50V K SL TS	
		C155	0CN1520F568	CAPACITOR TUBULA(HIGH DIELE)	1500P 16V K X TA26	
		C160	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C161	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C162	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	

[REPLACEMENT PARTS LIST]

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C172	0CC1200K415	CAPACITOR,CERAMIC(TEMP COMP)	12P 50V J NPO TS	
		C202.2	0CN2210K518	CAPACITOR TUBULA(HIGH DIELE)	220P 50V K B TA26	
		C221	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C222	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C301	0CE2246K618	CAPACITOR,ELECTROLYTIC	0.22M SMS 50V M FM5 TP(5)	
		C302	0CE2246K618	CAPACITOR,ELECTROLYTIC	0.22M SMS 50V M FM5 TP(5)	
		C303	0CX3900K408	CAPACITOR TUBULA(T.C)	39P 50V J SL TA26	
		C304	0CX3900K408	CAPACITOR TUBULA(T.C)	39P 50V J SL TA26	
		C306	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C307	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C308	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C309	0CE4756K618	CAPACITOR,ELECTROLYTIC	4.7M SMS 50V M FL TP(5)	
		C310	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C311	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C317	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C318	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C322	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C323	0CN3320F668	CAPACITOR TUBULA(HIGH DIELE)	3300P 16V M TA26	
		C325	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C326	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C327	0CN6810K518	CAPACITOR TUBULA(HIGH DIELE)	680P 50V K B TA26	
		C328	0CN6810K518	CAPACITOR TUBULA(HIGH DIELE)	680P 50V K B TA26	
		C329	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C330	0CN4710K518	CAPACITOR TUBULA(HIGH DIELE)	470P 50V K B TA26	
		C331	0CN4710K518	CAPACITOR TUBULA(HIGH DIELE)	470P 50V K B TA26	
		C332	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C334	0CN3320F668	CAPACITOR TUBULA(HIGH DIELE)	3300P 16V M TA26	
		C335	0CN1030F678	CAPACITOR TUBULA(HIGH DIELE)	0.01M 16V M Y TA26	
		C336	0CX2700K408	CAPACITOR TUBULA(T.C)	27P 50V J SL TA26	
		C337	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C338	0CQ4721N409	CAPACITOR POLYESTER(MYLAR)	0.0047U 100V J POLY TP	
		C339	0CX2700K408	CAPACITOR TUBULA(T.C)	27P 50V J SL TA26	
		C340	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C341	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C343	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C345	0CX1500K408	CAPACITOR TUBULA(T.C)	15P 50V J SL TA26	
		C346	0CX1500K408	CAPACITOR TUBULA(T.C)	15P 50V J SL TA26	
		C347	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C348	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C349	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C350	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C601	0CE1076J618	CAPACITOR,ELECTROLYTIC	100UF SMS 35V M FM(5) TP(5)	
		C603	0CK2230K945	CAPACITOR CERAMIC(HIGH DIELE)	0.022M 50V Z F TS	
		C604	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C605	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C606	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C607	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C608	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C609	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C611	0CQ6821N409	CAPACITOR POLYESTER(MYLAR)	0.0068U 100V J POLY TP	

[REPLACEMENT PARTS LIST] PAGE : 4

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C612	0CQ6821N409	CAPACITOR POLYESTER(MYLAR)	0.0068U 100V J POLY TP	
		C613	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C614	0CN6820F668	CAPACITOR TUBULA(HIGH DIELE)	6800P 16V M X TA26	
		C615	0CN6820F668	CAPACITOR TUBULA(HIGH DIELE)	6800P 16V M X TA26	
		C616	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C617	0CQ2721N409	CAPACITOR POLYESTER(MYLAR)	0.0027M 100V J POLY TP	
		C618	0CQ2721N409	CAPACITOR POLYESTER(MYLAR)	0.0027M 100V J POLY TP	
		C619	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C620	0CN6810K518	CAPACITOR TUBULA(HIGH DIELE)	680P 50V K B TA26	
		C621	0CN6810K518	CAPACITOR TUBULA(HIGH DIELE)	680P 50V K B TA26	
		C622	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C623	0CN2710K518	CAPACITOR TUBULA(HIGH DIELE)	270P 50V K B TA26	
		C624	0CN2710K518	CAPACITOR TUBULA(HIGH DIELE)	270P 50V K B TA26	
		C625	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C626	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C632	0CK2230K945	CAPACITOR CERAMIC(HIGH DIELE)	0.022M 50V Z F TS	
		C633	0CE4776D618	CAPACITOR,ELECTROLYTIC	470M SMS 10V M FL TP(5)	
		C635	624-034I	CAPACITOR ELECTROLYTIC DOIB	GOLD,FM0H104ZTP NEC	
		C636	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C639	0CC1500K415	CAPACITOR,CERAMIC(TEMP COMP)	15P 50V J NP0 TS	
		C640	0CC1500K415	CAPACITOR,CERAMIC(TEMP COMP)	15P 50V J NP0 TS	
		C641	0CX3300K408	CAPACITOR TUBULA(T.C)	33P 50V J SL TA26	
		C642	0CX3300K408	CAPACITOR TUBULA(T.C)	33P 50V J SL TA26	
		C647	0CE2276D618	CAPACITOR,ELECTROLYTIC	220M SMS 10V M FM5 TP(5)	
		C648	0CK2230K945	CAPACITOR CERAMIC(HIGH DIELE)	0.022M 50V Z F TS	
		C652	0CE1076D618	CAPACITOR,ELECTROLYTIC	100M SMS 10V M FM5 TP(5)	
		C801	0CE2266L618	CAPACITOR,ELECTROLYTIC	22M SMS 63V M FL TP(5)	
		C803	0CN1020K518	CAPACITOR TUBULA(HIGH DIELE)	1000P 50V K B TA26	
		C806	0CE4776D618	CAPACITOR,ELECTROLYTIC	470M SMS 10V M FL TP(5)	
		C807	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C808	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C809	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C810	0CK4730K945	CAPACITOR CERAMIC(HIGH DIELE)	0.047U 50V Z F TS	
		C811	0CE4781J610	CAPACITOR,ELECTROLYTIC	4700M SM 35V M FL	
		C812	0CE4781J610	CAPACITOR,ELECTROLYTIC	4700M SM 35V M FL	
		C813	0CE1076J618	CAPACITOR,ELECTROLYTIC	100UF SMS 35V M FM(5) TP(5)	
		C814	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C818	0CE4776H630	CAPACITOR,ELECTROLYTIC	470M SMS 25V M FM5	
		C819	0CE4776H630	CAPACITOR,ELECTROLYTIC	470M SMS 25V M FM5	
		C820	0CE4776H630	CAPACITOR,ELECTROLYTIC	470M SMS 25V M FM5	
		C821	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C822	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C823	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C824	0CE2266F618	CAPACITOR,ELECTROLYTIC	22M SMS 16V M FM5 TP(5)	
		C826	0CE4766H618	CAPACITOR,ELECTROLYTIC	47M SMS 25V M FL TP(5)	
		C828	0CE4766H618	CAPACITOR,ELECTROLYTIC	47M SMS 25V M FL TP(5)	
		C829	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C830	0CQ2731N409	CAPACITOR POLYESTER(MYLAR)	0.027U 100V J POLY TP	
		C831	0CQ2731N409	CAPACITOR POLYESTER(MYLAR)	0.027U 100V J POLY TP	
		C832	0CE3346K618	CAPACITOR,ELECTROLYTIC	0.33M SMS 50V M FL TP(5)	

「REPLACEMENT PARTS LIST」 PAGE : 5

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		C833	0CX4R70K518	CAPACITOR TUBULA(T.C)	4.7P 50V K NP0 TA26	
		C834	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C835	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C836	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C837	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C838	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C839	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C840	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C841	0CQ1041N409	CAPACITOR POLYESTER(MYLAR)	0.1U 100V J POLY TP	
		C842	0CE3376F618	CAPACITOR,ELECTROLYTIC	330M SMS 16V M FM5 TP5	
		C843	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C844	0CE2256K618	CAPACITOR,ELECTROLYTIC	2.2M SMS 50V M FL TP(5)	
		C845	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C846	0CE1056K618	CAPACITOR,ELECTROLYTIC	1.0M SMS 50V M FL TP(5)	
		C847	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C848	0CE1066K618	CAPACITOR,ELECTROLYTIC	10M SMS 50V M FM5 TP(5)	
		C853	0CQ4731N409	CAPACITOR POLYESTER(MYLAR)	0.047U 100V J POLY TP	
		C854	0CQ4731N409	CAPACITOR POLYESTER(MYLAR)	0.047U 100V J POLY TP	
		C855	0CQ5631N409	CAPACITOR POLYESTER(MYLAR)	0.056U 100V J POLY TP	
		C856	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C857	0CE1076F618	CAPACITOR,ELECTROLYTIC	100M SMS 16V M FM5 TP(5)	
		C858	0CQ5631N409	CAPACITOR POLYESTER(MYLAR)	0.056U 100V J POLY TP	
		C860	0CE4746K618	CAPACITOR,ELECTROLYTIC	0.47M SMS 50V M FL TP(5)	
		C861	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C862	0CN1010K518	CAPACITOR TUBULA(HIGH DIELE)	100P 50V K B TA26	
		C865	0CK1030K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.01UF 50V Z F TS	
		C866	0CK1030K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.01UF 50V Z F TS	
		C867	0CK1030K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.01UF 50V Z F TS	
		C868	0CK1030K945	CAPACITOR,CERAMIC(HIGH DIELEC)	0.01UF 50V Z F TS	
		C871	0CX4R70K518	CAPACITOR TUBULA(T.C)	4.7P 50V K NP0 TA26	
		C898	0CC6810K505	CAPACITOR CERAMIC(TEMP COMP)	680P 50V K SL TS	
		C899	0CC6810K505	CAPACITOR CERAMIC(TEMP COMP)	680P 50V K SL TS	
		DSP601	659-250N	DISPLAY	BJ 180GK,DIGITRON,FUTABA	
		D101	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D102	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D103	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D104	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D111	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D340	0DD400209BA	DIODE	R0IN4002T1A,RECTRON,TP	
		D601	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D602	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D603	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D604	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D605	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D606	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D607	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D608	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D609	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D610	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D615	0DD132009AA	DIODE	1SS132 DETECT,SW TP	

[REPLACEMENT PARTS LIST] PAGE : 6

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		D617	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D620	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D621	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D625	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D627	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D628	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D631	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D801	0DD400209BA	DIODE	R0IN4002T1A,RECTRON,TP	
		D802	0DD400209BA	DIODE	R0IN4002T1A,RECTRON,TP	
		D803	0DD400209BA	DIODE	R0IN4002T1A,RECTRON,TP	
		D804	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D805	0DD604000CA	DIODE	PBPC604,BRIDGE,SILITEK	
		D808	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D809	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D863	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		D999	0DD132009AA	DIODE	1SS132 DETECT,SW TP	
		FB601	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB602	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB603	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB604	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB605	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB606	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB607	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB608	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB609	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB610	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB611	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB612	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB613	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB614	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB615	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB616	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB617	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB618	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB619	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB620	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB621	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB622	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB623	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB624	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB625	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB626	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB627	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB628	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB629	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB701	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB702	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB703	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB801	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB802	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	

「REPLACEMENT PARTS LIST」 PAGE : 7

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		FB803	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB804	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB806	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB807	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB808	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB809	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB810	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB811	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		FB812	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		F101	0FT8000B513	FUSE TIME LAG	0.8A 250V 5.2X20 G SMK	
		IC101	0ISA185100A	IC, SANYO	LA1851N IF+MPX FOR DTS SANYO	
		IC102	0ISG405200A	IC,SGS-THOMSON	HCF4052BEY 4CH ANALOG MUL,SGS	
		IC104	0ISA721800A	IC,SANYO	LC7218 PLL,SANYO	
		IC303	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC304	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC305	0ISG405200A	IC,SGS-THOMSON	HCF4052BEY 4CH ANALOG MUL,SGS	
		IC601	0ISA866116A	IC,SANYO	LC866116A MICOM(FR-606),SANYO	
		IC602	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC603	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC604	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC605	0IMT572009B	IC,MITSUMI	PST572E-2 TP 3.9V,MITSUMI	
		IC801	0ISA414200A	IC,SANYO	STK4142-2 PWR(25W),SANYO	
		IC802	0INS791500A	IC, NATIONAL SEMICONDUCTOR	LM7915CT (15V REG 1A),N/S	
		IC803	0IGS781500B	IC, GOLDSTAR ELECTRON	GL7815 15V 1A REGULATOR,G/S	
		IC804	0IGS781200C	IC, GOLDSTAR ELECTRON	GL7812 12V 1A REGULATOR,G/S	
		IC805	0IGS455800A	IC, GOLDSTAR ELECTRON	GL4558 OP AMP	
		IC806	0IRH620900B	IC, ROHM	BA6209N MOTOR DRIVER	
		IC811	0IGS780500A	IC, GOLDSTAR ELECTRON	GL7805 REGULATOR	
		JK1	561-100H	CONNECTOR	TERMIANL ANT SP-031	
		JK2	576-002B	JACK RCA	JACK,BLOCK S-436P-2P(WH/RD)(S)	
		JK3	561-9040	CONNECTOR	WAFER,SMK CFG1115-0101	
		JK4	561-100E	CONNECTOR	TERMIANL SPEAKER SP-034A	
		JK5	577-009A	SOCKET	HSC0528-01-020 VDE J-HOSIDEN	
		JK810	572-334A	JACK 6.4	HLJ5315-01-4010 H=12.5 9PIN	
		LD601	0DL220000AC	DIODE,LED		
		L101	634-700E	COIL OSCILLATOR	RBW07VB-K5004 MW RF OSC TOKO	
		L102	634-700D	COIL OSCILLATOR	RBW07VB-K0003 LW RF OSC TOKO	
		L103	637N010A	INDUCTOR	RC-875 (0732-000-017) 393K	
		L104	638-102A	COIL TRAP FM	COIL,MPX FILTER 19K, 38K (S)	
		L105	638-102A	COIL TRAP FM	COIL,MPX FILTER 19K, 38K (S)	
		L106	647-014E	DISCRIMINATOR	DISC FM 7 (LA1851N)	
		L107	637-601D	INDUCTOR	INDUCTOR, F 20.8MH (S)	
		L108	644-040A	TRANS	PCFMA-157, MW IF TOKO	
		PN601	561-715B	CONNECTOR	WAFER, G/S GIL-G-02P-S3T2-E(S)	
		PN801	561-802J	CONNECTOR	HOUSING,B TO B 52170-1010	
		PN802	561-802F	CONNECTOR	HOUSING,B TO B 52170-0610	
		PN803	561-802J	CONNECTOR	HOUSING,B TO B 52170-1010	
		PN805	561-715I	CONNECTOR	WAFER,G/S GIL-G-09P-S3T2-E (S)	
		PN807	561-715C	CONNECTOR	WAFER, G/S GO;-G-03P-S3T2-E(S)	
		PN809	561-715F	CONNECTOR	WAFER,G/S GIL-G-06P-S3T2-EA(S)	

[REPLACEMENT PARTS LIST]　　PAGE : 8

MODEL : FR-606L　BG1　　SET PART NO : 112-606A　　RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		PN810	561-715H	CONNECTOR	WAFER,G/S GIL-G-08P-S3T2-E (S)	
		Q1	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q101	0TR319209AA	TRANSISTOR	KTC3192-0 TP,KEC(KTC380TM-0)	
		Q102	0TR126709AB	TRANSISTOR	KTA1267-Y MINI TP,KEC	
		Q103	0INS780500B	IC,NATIONAL SEMICONDUCTOR	LM78L05ACZ VOLTAGE REGULATOR	
		Q106	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q107	667T010C	FET	KTK30A-Y TAPE TO-92 KEC　(S)	
		Q108	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		Q109	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		Q110	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q111	0TR320309AA	TRANSISTOR	KTC3203-TP-Y (KTC2120)KEC	
		Q112	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q113	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q114	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q115	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q116	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q117	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q601	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q602	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		Q604	0TR127509AA	TRANSISTOR	KTA1275-R TP,KEC (KTA1013)	
		Q803	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		Q804	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q805	0TR114009AD	TRANSISTOR	DTC114ES　ROHM-K	
		Q806	0TR949009AA	TRANSISTOR	KTA949-Y TP, KEC	
		Q807	0TR320609AA	TRANSISTOR	KTC3206-TP-0 (KTC2229)KEC	
		Q808	0TR949009AA	TRANSISTOR	KTA949-Y TP, KEC	
		Q809	0TR949009AA	TRANSISTOR	KTA949-Y TP, KEC	
		Q810	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	
		Q811	0TR130209AA	TRANSISTOR	KTD1302 MUTING TP,KEC	
		Q812	0TR114009AA	TRANSISTOR	DTA114ES ROHM	
		Q814	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		Q815	0TR319809AA	TRANSISTOR	KTC3198-TP-Y (KTC1815)KEC	
		RM601	668-090R	INTEGRATED CIRCUIT	DJT-004 MODULE(38KHZ),D/J	
		RY801	557-018B	RELAY	G5Z-2A,24VDC,UL/CSA,OMRON	
		R101	0RD1000F608	RESISTOR,FIXED CARBON FILM	100　1/6W　5　TA26	
		R102	0RD5600F608	RESISTOR,FIXED CARBON FILM	560　1/6W　5　TA26	
		R103	0RD3901F608	RESISTOR,FIXED CARBON FILM	3.9K 1/6W　5　TA26	
		R104	0RD3300F608	RESISTOR,FIXED CARBON FILM	330　1/6W　5　TA26	
		R105	631T603F	COIL ANTENNA	4EAD CORE,BF45TS-2,6X6X0.8 TDK	
		R106	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W　5　TA26	
		R107	0RD1200F608	RESISTOR,FIXED CARBON FILM	120　1/6W　5　TA26	
		R108	0RD1000F608	RESISTOR,FIXED CARBON FILM	100　1/6W　5　TA26	
		R109	0RD5601G608	RESISTOR,FIXED CARBON FILM	5.6K 1/4W　5　TA26	
		R110	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K　1/6W　5　TA26	
		R112	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K　1/6W　5　TA26	
		R113	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K　1/6W　5　TA26	
		R114	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K　1/6W　5　TA26	
		R117	0RD7501F608	RESISTOR,FIXED CARBON FILM	7.5K 1/6W　5　TA26	
		R118	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K　1/6W　5　TA26	
		R119	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W　5　TA26	

「REPLACEMENT PARTS LIST」 P A G E : 9

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R120	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R121	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R122	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R123	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R124	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R125	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R126	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R128	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R129	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R130	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R131	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R132	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R133	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R134	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R135	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R136	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R137	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R138	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R139	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R141	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R142	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R143	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R144	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R145	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R146	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R147	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R149	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R150	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R151	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R152	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R153	0RD5600F608	RESISTOR,FIXED CARBON FILM	560 1/6W 5 TA26	
		R154	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R155	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R159	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R160	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R161	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R162	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R163	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R164	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R166	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R168	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R170	0RD0332G608	RESISTOR,FIXED CARBON FILM	33 1/4W 5 TA26	
		R171	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R201	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R202	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R214	0RD1501G608	RESISTOR,FIXED CARBON FILM	1.5K 1/4W 5 TA26	
		R216	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R217	0RD1202G608	RESISTOR,FIXED CARBON FILM	12K 1/4W 5 TA26	
		R222	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R223	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	

[REPLACEMENT PARTS LIST]

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R225	0RD1201G608	RESISTOR,FIXED CARBON FILM	1.2K 1/4W 5 TA26	
		R226	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R227	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R228	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R301	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R302	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R303	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R304	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R305	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R306	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R329	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R330	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R335	0RD3302F608	RESISTOR,FIXED CARBON FILM	33K 1/6W 5 TA26	
		R336	0RD3302F608	RESISTOR,FIXED CARBON FILM	33K 1/6W 5 TA26	
		R337	0RD1803F608	RESISTOR,FIXED CARBON FILM	180K 1/6W 5 TA26	
		R338	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R339	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R341	0RD2201G608	RESISTOR,FIXED CARBON FILM	2.2K 1/4W 5 TA26	
		R342	0RD1803F608	RESISTOR,FIXED CARBON FILM	180K 1/6W 5 TA26	
		R343	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R344	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R345	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R346	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R347	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R348	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R350	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R351	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R352	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R353	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R354	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R360	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R361	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R362	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R363	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R364	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R601	0RD3901G608	RESISTOR,FIXED CARBON FILM	3.9K 1/4W 5 TA26	
		R602	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R603	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R604	0RD1003G608	RESISTOR,FIXED CARBON FILM	100K 1/4W 5 TA26	
		R605	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R606	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R607	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R609	0RD4701G608	RESISTOR,FIXED CARBON FILM	4.7K 1/4W 5 TA26	
		R610	0RD5600G608	RESISTOR,FIXED CARBON FILM	560 1/4W 5 TA26	
		R611	0RD3902F608	RESISTOR,FIXED CARBON FILM	39K 1/6W 5 TA26	
		R612	0RD4703F608	RESISTOR,FIXED CARBON FILM	470K 1/6W 5 TA26	
		R613	0RD1504F608	RESISTOR,FIXED CARBON FILM	1.5M 1/6W 5 TA26	
		R614	0RD2202G608	RESISTOR,FIXED CARBON FILM	22K 1/4W 5 TA26	
		R615	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R616	0RD2204F608	RESISTOR,FIXED CARBON FILM	2.2M 1/6W 5 TA26	

[REPLACEMENT PARTS LIST]　　PAGE : 11

MODEL : FR-606L　BG1　　SET PART NO : 112-606A　　RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R617	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R618	0RD6802F608	RESISTOR,FIXED CARBON FILM	68K 1/6W 5 TA26	
		R619	0RD4703F608	RESISTOR,FIXED CARBON FILM	470K 1/6W 5 TA26	
		R620	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R621	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R622	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R623	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R624	0RD6802F608	RESISTOR,FIXED CARBON FILM	68K 1/6W 5 TA26	
		R625	0RD3903F608	RESISTOR,FIXED CARBON FILM	390K 1/6W 5 TA26	
		R626	0RD0102F608	RESISTOR,FIXED CARBON FILM	10 1/6W 5 TA26	
		R627	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R628	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R629	0RD1202F608	RESISTOR,FIXED CARBON FILM	12K 1/6W 5 TA26	
		R630	0RD3902F608	RESISTOR,FIXED CARBON FILM	39K 1/6W 5 TA26	
		R631	0RD3903F608	RESISTOR,FIXED CARBON FILM	390K 1/6W 5 TA26	
		R632	0RD0102F608	RESISTOR,FIXED CARBON FILM	10 1/6W 5 TA26	
		R633	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R634	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R635	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R636	0RD3302F608	RESISTOR,FIXED CARBON FILM	33K 1/6W 5 TA26	
		R637	0RD4703F608	RESISTOR,FIXED CARBON FILM	470K 1/6W 5 TA26	
		R638	0RD0102F608	RESISTOR,FIXED CARBON FILM	10 1/6W 5 TA26	
		R639	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R640	0RD2203F608	RESISTOR,FIXED CARBON FILM	220K 1/6W 5 TA26	
		R641	0RD0102F608	RESISTOR,FIXED CARBON FILM	10 1/6W 5 TA26	
		R651	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R652	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R653	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R654	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R655	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R656	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R657	0RD4701G608	RESISTOR,FIXED CARBON FILM	4.7K 1/4W 5 TA26	
		R658	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R659	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R661	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R662	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R663	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R664	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R665	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R666	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R667	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R668	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R669	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R670	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R674	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R675	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R676	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R677	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R678	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R679	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	

⌊REPLACEMENT PARTS LIST⌉ P A G E : 12

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R680	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R681	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R683	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R684	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R685	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R686	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R687	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R690	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R691	0RD3301G608	RESISTOR,FIXED CARBON FILM	3.3K 1/4W 5 TA26	
		R692	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R693	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R694	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R696	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R698	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R699	0RD3901G608	RESISTOR,FIXED CARBON FILM	3.9K 1/4W 5 TA26	
		R700	0RD1202G608	RESISTOR,FIXED CARBON FILM	12K 1/4W 5 TA26	
		R701	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R702	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	
		R703	0RD8200F608	RESISTOR,FIXED CARBON FILM	820 1/6W 5 TA26	
		R704	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R705	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R706	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R707	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R708	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R709	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R711	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R712	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	
		R713	0RD8200F608	RESISTOR,FIXED CARBON FILM	820 1/6W 5 TA26	
		R714	0RD1201F608	RESISTOR,FIXED CARBON FILM	1.2K 1/6W 5 TA26	
		R715	0RD1501F608	RESISTOR,FIXED CARBON FILM	1.5K 1/6W 5 TA26	
		R716	0RD2201F608	RESISTOR,FIXED CARBON FILM	2.2K 1/6W 5 TA26	
		R717	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R718	0RD4701F608	RESISTOR,FIXED CARBON FILM	4.7K 1/6W 5 TA26	
		R719	0RD8201F608	RESISTOR,FIXED CARBON FILM	8.2K 1/6W 5 TA26	
		R720	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R721	0RD2702F608	RESISTOR,FIXED CARBON FILM	27K 1/6W 5 TA26	
		R722	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R723	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R741	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R771	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R772	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R807	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R808	0RD5601G608	RESISTOR,FIXED CARBON FILM	5.6K 1/4W 5 TA26	
		R809	0RN1000G609	RESISTOR,FIX METAL FILM	100 1/4W 5 TA52	
		R812	0RD1002G608	RESISTOR,FIXED CARBON FILM	10K 1/4W 5 TA26	
		R813	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R815	0RD5602G608	RESISTOR,FIXED CARBON FILM	56K 1/4W 5 TA26	
		R816	0RD5602G608	RESISTOR,FIXED CARBON FILM	56K 1/4W 5 TA26	
		R817	0RD6800G608	RESISTOR,FIXED CARBON FILM	680 1/4W 5 TA26	
		R818	0RD6800F608	RESISTOR,FIXED CARBON FILM	680 1/6W 5 TA26	

[REPLACEMENT PARTS LIST] P A G E : 13

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R819	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R820	614-005T	RESISTOR WIRE WOUND DOIB	R, REC WIRE WOUND 3W 0.22J	
		R821	0RD2201G608	RESISTOR,FIXED CARBON FILM	2.2K 1/4W 5 TA26	
		R822	0RD2201G608	RESISTOR,FIXED CARBON FILM	2.2K 1/4W 5 TA26	
		R823	0RD2201G608	RESISTOR,FIXED CARBON FILM	2.2K 1/4W 5 TA26	
		R824	0RD2201G608	RESISTOR,FIXED CARBON FILM	2.2K 1/4W 5 TA26	
		R825	614-005T	RESISTOR WIRE WOUND DOIB	R, REC WIRE WOUND 3W 0.22J	
		R826	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R827	0RD1001G608	RESISTOR,FIXED CARBON FILM	1.0K 1/4W 5 TA26	
		R828	0RD2703G608	RESISTOR,FIXED CARBON FILM	270K 1/4W 5 TA26	
		R829	0RD2200G608	RESISTOR,FIXED CARBON FILM	220 1/4W 5 TA26	
		R830	0RD1801G608	RESISTOR,FIXED CARBON FILM	1.8K 1/4W 5 TA26	
		R832	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R833	0RD3902G608	RESISTOR,FIXED CARBON FILM	39K 1/4W 5 TA26	
		R834	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R835	0RD1801G608	RESISTOR,FIXED CARBON FILM	1.8K 1/4W 5 TA26	
		R836	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R837	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R838	0RD5602F608	RESISTOR,FIXED CARBON FILM	56K 1/6W 5 TA26	
		R839	0RD2200G608	RESISTOR,FIXED CARBON FILM	220 1/4W 5 TA26	
		R840	0RD3902G608	RESISTOR,FIXED CARBON FILM	39K 1/4W 5 TA26	
		R843	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R844	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R845	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R846	0RD3301F608	RESISTOR,FIXED CARBON FILM	3.3K 1/6W 5 TA26	
		R847	0RD5601G608	RESISTOR,FIXED CARBON FILM	5.6K 1/4W 5 TA26	
		R848	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R851	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R852	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R853	0RD0102G608	RESISTOR,FIXED CARBON FILM	10 1/4W 5 TA26	
		R855	0RD2701F608	RESISTOR,FIXED CARBON FILM	2.7K 1/6W 5 TA26	
		R856	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R857	0RD2202F608	RESISTOR,FIXED CARBON FILM	22K 1/6W 5 TA26	
		R858	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R859	0RD1001F608	RESISTOR,FIXED CARBON FILM	1.0K 1/6W 5 TA26	
		R860	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R861	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R862	0RD2701F608	RESISTOR,FIXED CARBON FILM	2.7K 1/6W 5 TA26	
		R863	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R864	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R865	0RD1003F608	RESISTOR,FIXED CARBON FILM	100K 1/6W 5 TA26	
		R867	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R868	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R869	0RD1004F608	RESISTOR,FIXED CARBON FILM	1.0M 1/6W 5 TA26	
		R871	0RD4702F608	RESISTOR,FIXED CARBON FILM	47K 1/6W 5 TA26	
		R872	0RD1502F608	RESISTOR,FIXED CARBON FILM	15K 1/6W 5 TA26	
		R873	0RD1004F608	RESISTOR,FIXED CARBON FILM	1.0M 1/6W 5 TA26	
		R874	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R875	0RD5601F608	RESISTOR,FIXED CARBON FILM	5.6K 1/6W 5 TA26	
		R876	0RD6800G608	RESISTOR,FIXED CARBON FILM	680 1/4W 5 TA26	

[REPLACEMENT PARTS LIST] PAGE : 14

MODEL : FR-606L BG1 SET PART NO : 112-606A RUN-DATE : 93.06.22

S	AL	LOCA.NO	PART NO(GS)	DESCRIPTION	SPECIFICATION	REMARKS
		R877	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R877	0RD6800G608	RESISTOR,FIXED CARBON FILM	680 1/4W 5 TA26	
		R878	0RD1002F608	RESISTOR,FIXED CARBON FILM	10K 1/6W 5 TA26	
		R878	0RD6800G608	RESISTOR,FIXED CARBON FILM	680 1/4W 5 TA26	
		R879	0RD1000G608	RESISTOR,FIXED CARBON FILM	100 1/4W 5 TA26	
		R879	0RD6800G608	RESISTOR,FIXED CARBON FILM	680 1/4W 5 TA26	
		R888	0RS2200K665	RESISTOR,FIX METAL FILM OXIDE	220 2W 5 SF20	
		SW601	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW603	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW604	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW605	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW606	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW607	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW608	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW609	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW611	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW612	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW613	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW614	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW615	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW616	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW617	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW618	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW619	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW620	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW621	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW622	558T026A	SWITCH SPECIAL	TACT EVQ-114 04M H=4.3 TP	
		SW823	558-026I	SWITCH SPECIAL	TACT JTP-1236A JEIL	
		TUN101	521-026X	TUNER RADIO CAR	FE417-G02 MITSUMI	
		T701	641-838Z	TRANS POWER	115/230V 50/60HZ 66*55 TK	
		VR101	0RV1223D230	VARIABLE RESISTOR,CARBON FILM	22K 6 ST P3 L2.5 5	
		VR102	0RV1472D230	VARIABLE RESISTOR,CARBON FILM	4.7K 6 ST P3 L2.5 5	
		VR301	611-646J	RESISTOR VARIABLLE	RK16Y12MC1R253B	
		VR802	611-649I	RESISTOR VARIABLLE	K162N0G0D-100KBX2 (S)	
		X101	617T602D	CRYSTAL	7.2MHZ	
		X601	616-020P	FILTER CERAMIC	CSA6.00MGU MURATA	
		X602	617-602F	CRYSTAL	32.768KHZ KYOCERA (S)	
		ZD101	0DZ100009FA	DIODE,ZENER	MTZ10-C T-77 10V TP,ROHM/K	
		ZD104	0DZ330009AG	DIODE,ZENER	MTZ3.3B-T-77 ROHM-K	
		ZD601	0DZ270009CC	DIODE,ZENER	MTZ27D-T-77 ROHM-K	
		ZD602	0DZ820009CC	DIODE,ZENER	MTZ8.2C-T-77 ROHM-K	
		ZD603	0DZ620009EA	DIODE,ZENER	MTZ6.2-B T-77 6.2V TP,ROHM/K	
		ZD604	0DZ620009EA	DIODE,ZENER	MTZ6.2-B T-77 6.2V TP,ROHM/K	
		ZD605	0DZ560009FA	DIODE,ZENER	MTZ5.6-B T-77 5.6V TP,ROHM/K	
		ZD803	0DZ510009HA	DIODE,ZENER	MTZ5.1-B T-77 5.1V TP,ROHM/K	
		ZD867	0DZ510009HA	DIODE,ZENER	MTZ5.1-B T-77 5.1V TP,ROHM/K	
		ZD606	0DZ820009CC	DIODE,ZENER	MTZ8.2C-T-77 ROHM-K	
				*** END OF DATA ***		